

Voltage Controlled Crystal Oscillator

CVXO-018T Model 5x7 mm SMD, 3.3V, HCMOS





Frequency Range:	1MHz to 52MHz
Frequency Stability:	±25ppm to ±100ppm
Temperature Range:	
Operating:	0°C to 70°C
(Option M)	-20°C to 70°C
(Option X)	-40°C to 85°C
Storage:	-45°C to 90°C
Input Voltage:	3.3V ±0.3V
Control Voltage:	1.65V ±1.65V
Settability* At Nominal:	1.65V ±0.25V
Control Range:	±100ppm Min
Input Current:	40mA Max
Output:	HCMOS
Load:	15pF
Symmetry:	40/60% Max @ 50% Vdd
Rise/Fall Time:	5ns Max @ 20% to 80% Vdd
Logic:	"0" = 10% Vdd Max "1" = 90% Vdd Min
Linearity:	±10% Max
Aging:	<3ppm 1st/yr, <1ppm every year thereafter


Designed to meet today's requirements for 3.3V Voltage Controlled Crystal Oscillator SMD Applications. The CVXO-018T provides a disable function for ICT (in-circuit-testing). Available on 16mm tape and reel in quantities of 1K.

Dimensions inches (mm)

All dimensions are Max unless otherwise specified.

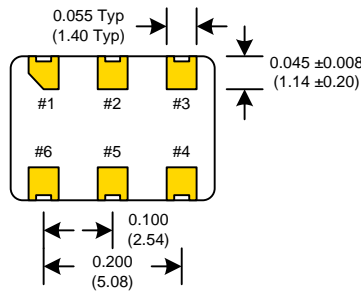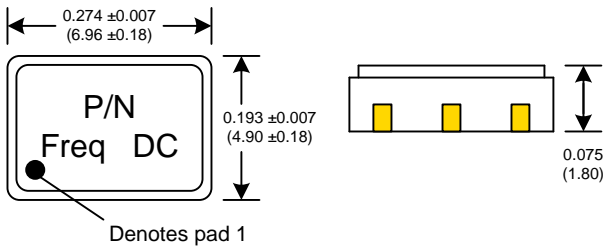


SUGGESTED PAD LAYOUT



0.01uF Bypass Capacitor Recommended

RECOMMENDED REFLOW SOLDERING PROFILE

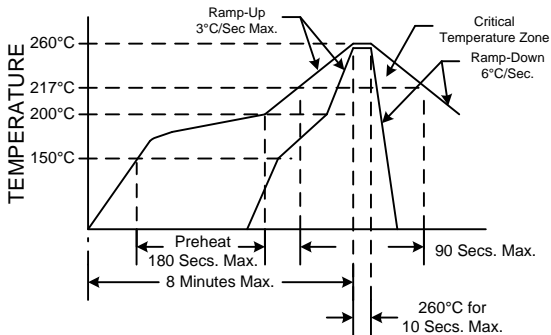

NOTE: Reflow Profile with 240°C peak also acceptable.

Crystek Part Number Guide

CVXO - 018T - X - 25 - 49.152

#1	#2	#3	#4	#5
#1 Crystek VCXO	#2 Model	#3 Temp. Range: Blank= 0/70°C, M= -20/70°C, X= -40/85°C	#4 Stability: (see Table 1)	#5 Frequency in MHz: 3 or 6 decimal places
				Stability Indicator
				Blank (std) ± 100ppm
				25 ± 25ppm
				50 ± 50ppm

Example:

CVXO-018TX-25-25.000 = 5.0V Tristate, -40/85°C, 40/60, 25ppm, 25.000 MHz

CVXO-018T-50-19.660800 = 5.0V Tristate, 0/70°C, 40/60, 50ppm, 19.660800 MHz

Table 1

PIN	Connection
1	Volt Cont.
2	Tri-State
3	GND
4	Output
5	N/C
6	Vdd

Tri-State Function	
Tri-State pin	Output pin
Open	Active
"1" level 2.7V Min	Active
"0" level 0.3V Max	High Z

Specifications subject to change without notice.

TD-021004 Rev. E

*Settability is the Control Voltage at which the Output Frequency is equal to the nominal Frequency.