


HOLE PATTERN:

Space requirement 6x6 pitch.

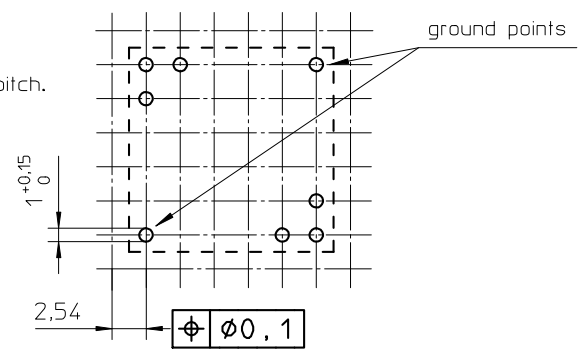

- Coil former material: Sumikon PM-9630 (PF), glass-reinforced.  
UL file number: E41429 - UL94V-0.
- Pin material: CuSn - Ni flash, Sn plated.
- Max. operating temp.: acc. to IEC 85 class H, 180°C.
- Resistance to soldering heat: acc. to IEC 68-2-20 Part 2, Test Tb, method 1B, 350°C - 3,5s.
- Solderability: acc. to IEC 68-2-20 Part 2, Test Ta, method 1, 235°C - 2s.
- Min. winding area: 15 mm<sup>2</sup>.
- Mean length of turn: 30 mm.

CLASSNO.		07-11-08	
NAME		CSV-RM6R-1S-6P-IZ	
NAAM		4322 021 06911	
MPA	CHECK CONTR.	DAT.	07-11-08
NAME	A.Wojtasz	SUPERS. VERV.	1
MPA		Property of Eigenaam van	© FERROXCUBE 2007
		SP/SH	112 - 001
		BL/BL	010
			A3