

HFKC/HFKC-T**AUTOMOTIVE RELAY**

Single



Twin

Typical Applications

Central door lock, Wiper control, Indicator control, Power door & windows, Anti-theft lock, Rear window and seat heating control, Lighting/flashlight/indicator lamp control

Features

- Subminiature automotive relay
- Maximum continuous current 30A
- Twin separate systems (Twin version)
- The reflow soldering Version (open vent hole) available (HFKC-T)
- RoHS & ELV compliant

CHARACTERISTICS

Contact arrangement	Single: 1A, 1C Twin: 2A, 2C	Release time	Typ.: 2ms Max.: 10ms ⁴⁾
Voltage drop (initial) ¹⁾	Typ.: 100mV (at 10A) Max.: 250mV (at 10A)	Ambient temperature	-40°C to 105°C
Max. continuous current	NO/NC: 30A/25A (at 23°C) 20A/15A (at 85°C)	Storage temperature	-40°C to 155°C
Max. switching current ²⁾ (NO contact)	Make: 40A ³⁾ Break: 30A	Vibration resistance	10Hz to 500Hz 58.8m/s ² (6g)
Electrical endurance	See "CONTACT DATA" table	Shock resistance	294m/s ² (30g)
Mechanical endurance	1x10 ⁷ OPS (300OPS/min)	Termination	PCB ⁵⁾
Initial insulation resistance	100MΩ (at 500VDC)	Construction	Wash tight, Flux proofed
Dielectric strength	500VAC (1min, leakage current less than 1mA)	Unit weight	Single version: Approx. 4g Twin version: Approx. 8g
Operate time	Typ.: 4ms Max.: 10ms (at nomi. vol.)		

1) Equivalent to the max. initial contact resistance is 100mΩ (at 1A 6VDC).
2) The value apply to a resistive or inductive load with suitable spark suppression.

3) For a load current duration maximum 3s for a on/off ratio of 1: 10.

4) The value is measured when voltage drops suddenly from nominal voltage to 0 VDC and coil is not paralleled with suppression circuit.

5) Since it is an environmental friendly product, please select lead-free solder when welding. The recommended soldering temperature and time is 240°C to 260°C, 2s to 5s.

CONTACT DATA⁵⁾

at 23°C

Load voltage	Load type		Load current A		On/Off ratio		Electrical endurance OPS	Contact material	Load wiring diagram ⁴⁾
			1C, 2C		On s	Off s			
			NO	NC					
13.5VDC	Resistive	Make	20	---	1	3	3×10 ⁵	AgSnO ₂ AgNi0.15	See diagram 1
		Break	20	---					
	Wiper L=1.0mH	Make	25 ⁽¹⁾	---	0.2	2	3×10 ⁵	AgSnO ₂	See diagram 2
		Break	5	---					
	Motor locked L=0.77mH	Make	20	---	0.2	2	1×10 ⁵	AgSnO ₂	See diagram 3
		Break	20	---					



HONGFA RELAY

ISO9001、ISO/TS16949、ISO14001、OHSAS18001 CERTIFIED

2007 Rev. 1.11

Load voltage	Load type		Load current A	On/Off ratio		Electrical endurance OPS	Contact material	Load wiring diagram ⁴⁾
			1A, 2A	On s	Off s			
13.5VDC	Resistive	Make	20	1	3	3×10^5	AgSnO ₂ AgNi0.15	See diagram 4
		Break	20					
	Flasher ³⁾	Make	$3 \times 21W$	0.365	0.365	2×10^6	Special AgSnO ₂	See diagram 5
		Break						
	Lamp	Make	$40^{(2)}$	2	2	1×10^5	AgSnO ₂	See diagram 6
		Break	10					

1) Corresponds to the peak inrush current on initial actuation (motor).

2) Corresponds to the peak inrush current on initial actuation (cold filament).

3) When it is utilized in flasher, a special AgSnO₂ contact material should be used and the customer special code should be (170) as a suffix. Please connect by the polarity according to the diagrams below.

4) The load wiring diagrams are listed below. When special AgSnO₂ contacts are applied, please heed the anode and cathode's request when wired.




diagram 1




diagram 2




diagram 3




diagram 4




diagram 5



diagram 6

5) When the load requirement is different from content of the table above, please contact Hongfa for relay application support.

COIL DATA

at 23°C

Nominal voltage VDC	Pick-up voltage VDC	Drop-out voltage VDC	Coil resistance $\times(\pm 10\%) \Omega$	Power consumption W	Max. allowable overdrive voltage ¹⁾ VDC	
					23°C	85°C
6	3.5	0.8	63	0.55	13.2	7.8
10	5.7	1.25	181	0.55	22	13
12	6.9	1.5	254	0.55	26	16
12	6.9	1.5	181	0.80	22	13
24	13.8	3.0	1016	0.55	53	31

1) Max. allowable overdrive voltage is stated with no load applied.

ORDERING INFORMATION

		HFKC /		012	Z	S	P	T	(XXX)
Type	HFKC: Standard HFKC-T: Reflow soldering version								
Coil voltage	006: 6VDC	010: 10VDC							
	012: 12VDC	024: 24VDC							
Contact arrangement	Z: 1 Form C		H: 1 Form A						
	2Z: 2 Form C		2H: 2 Form A						
Construction	S: Wash tight (HFKC)		Nil: Flux proofed (HFKC-T)						
Coil power	P: 0.8W		Nil: 0.55W						
Contact material	3: AgNi0.15		T: AgSnO ₂						
Customer special code	1) e.g. (170) stands for flasher load, (555) stands for RoHS & ELV compliant. In case there are multiple special requirements, all special codes should be followed one by one.								


1) HFKC/HFKC-T is an environmental friendly product, please mark special code (555) when order.

OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT


Unit: mm

Outline Dimensions

Single version

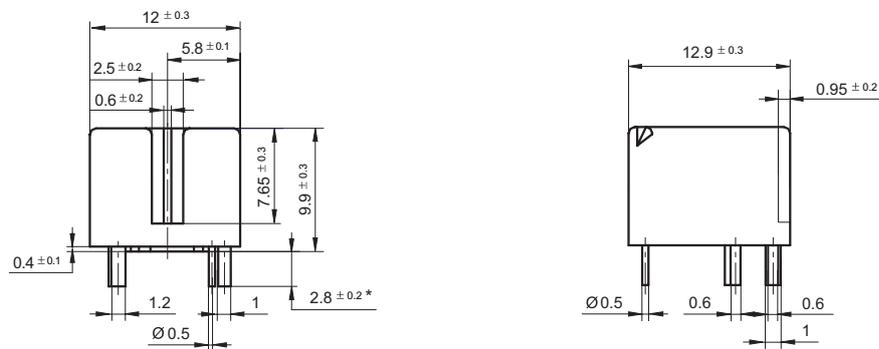

Twin version

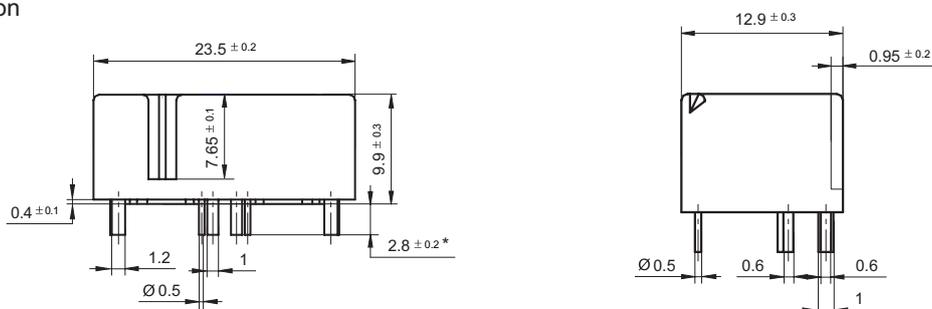


Notes: 1) * The additional tin top is max. 1mm;
2) The terminal vertical deviation tolerance is 0.2mm.


OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm

PCB Layout (Bottom view)

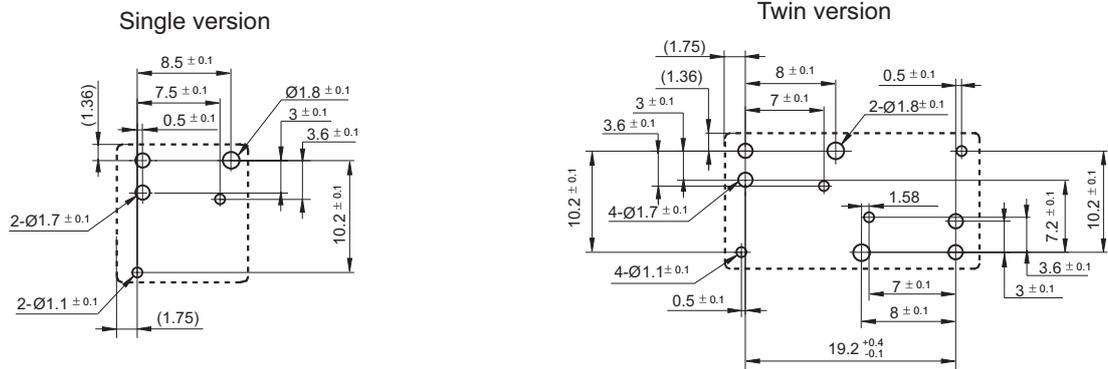


Wiring Diagram (Bottom view)

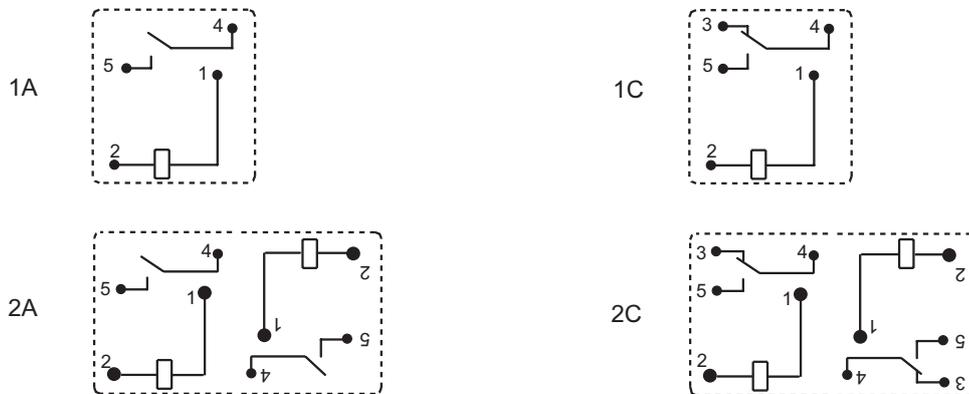

CHARACTERISTIC CURVES

1. Coil operating voltage range

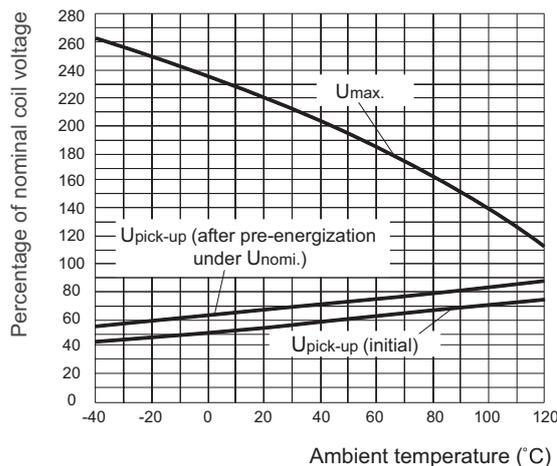

- 1) The operating voltage is connected with coil pre-energized time and voltage. After pre-energized, the operating voltage will increase.
- 2) The maximum allowable coil temperature is 155°C. For the coil temperature rise which is measured by resistance is average value, we recommend the coil temperature should be below 130°C under the different application ambient, different coil voltage and different load etc.
- 3) If the actual operating coil voltage is out of the specified range, please contact Hongfa for further details.

Disclaimer

This datasheet is for the customers' reference. All the specifications are subject to change without notice.

We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.