

2SB673 2SB674 2SB675

SILICON PNP EPITAXIAL TYPE (PCT PROCESS)
(DARLINGTON POWER)

9097250 TOSHIBA (DISCRETE/OPTO)


56C 07336 D T-33-1

HIGH POWER SWITCHING APPLICATIONS.
HAMMER DRIVE, PULSE MOTOR DRIVE APPLICATIONS.

INDUSTRIAL APPLICATIONS
Unit in mm

FEATURES:


- High DC Current Gain : $h_{FE}=2000(\text{Min.}) (V_{CE}=-3V, I_C=-3A)$
- Low Saturation Voltage : $V_{CE(\text{sat})}=-1.5V(\text{Max.}) (I_C=-3A)$
- Complementary to 2SD633, 2SD634 and 2SD635.

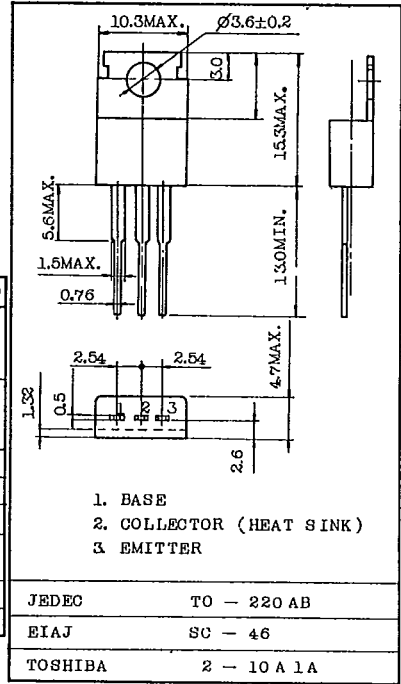

MAXIMUM RATINGS ($T_a=25^\circ\text{C}$)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Collector-Base Voltage	2SB673	V_{CBO}	-100	V
	2SB674		-80	
	2SB675		-60	
Collector-Emitter Voltage	2SB673	V_{CEO}	-100	V
	2SB674		-80	
	2SB675		-60	
Emitter-Base Voltage		V_{EBO}	-5	V
Collector Current		I_C	-7	A
Base Current		I_B	-0.2	A
Collector Power Dissipation ($T_c=25^\circ\text{C}$)		P_C	40	W
Junction Temperature		T_j	150	$^\circ\text{C}$
Storage Temperature Range		T_{stg}	-55~150	$^\circ\text{C}$

EQUIVALENT CIRCUIT

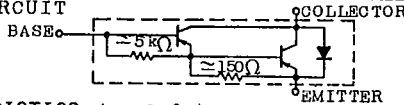







JEDEC TO - 220 AB
EIAJ SC - 46
TOSHIBA 2 - 10 A 1 A

Mounting Kit No. AC75
Weight : 1.9g

ELECTRICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	2SB673	I_{CBO}	$V_{CB}=-100V, I_E=0$	-	-	-100	μA
	2SB674		$V_{CB}=-80V, I_E=0$	-	-	-100	
	2SB675		$V_{CB}=-60V, I_E=0$	-	-	-100	
Emitter Cut-off Current		I_{EBO}	$V_{EB}=-5V, I_C=0$	-	-	-4.0	mA
Collector-Emitter Breakdown Voltage	2SB673	$V_{(BR)CEO}$	$I_C=-50\text{mA}, I_B=0$	-100	-	-	V
	2SB674			-80	-	-	
	2SB675			-60	-	-	
DC Current Gain			$h_{FE(1)}$	$V_{CE}=-3V, I_C=-3A$	2000	-	15000
			$h_{FE(2)}$	$V_{CE}=-3V, I_C=-7A$	1000	-	-
Collector-Emitter Saturation Voltage			$V_{CE(\text{sat})(1)}$	$I_C=-3A, I_B=-6\text{mA}$	-	-0.95	-1.5
			$V_{CE(\text{sat})(2)}$	$I_C=-7A, I_B=-14\text{mA}$	-	-1.3	-2.0
Base-Emitter Saturation Voltage		$V_{BE(\text{sat})}$	$I_C=-3A, I_B=-6\text{mA}$	-	-1.55	-2.5	V
Switching Time	Turn-on Time	t_{on}		-	0.8	-	μs
	Storage Time	t_{stg}		-	2.0	-	
	Fall Time	t_f		-	-	-	

www.DataSheet4U.com

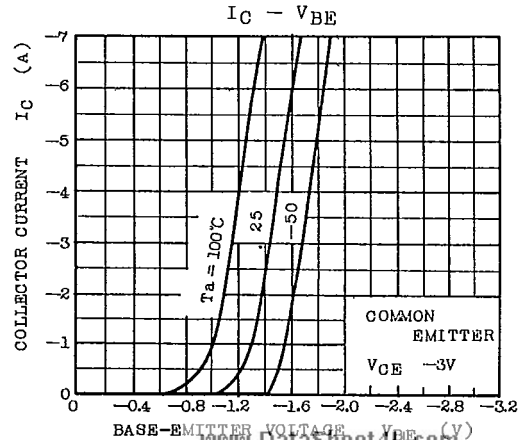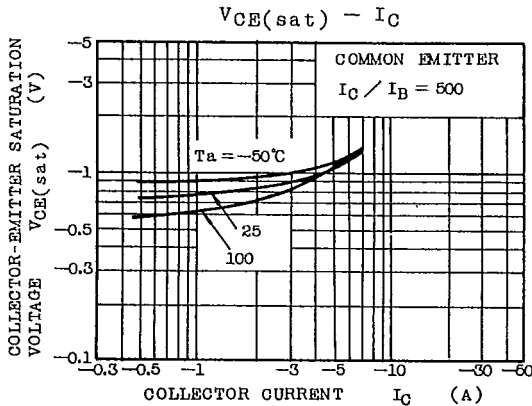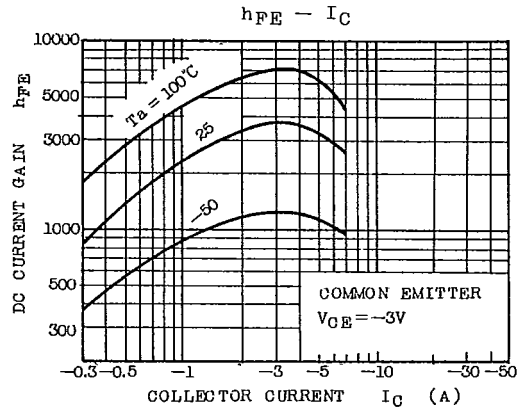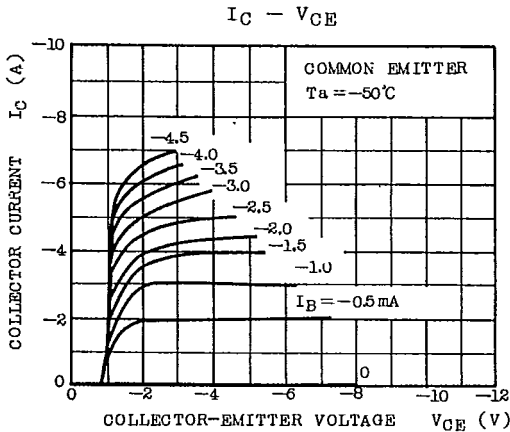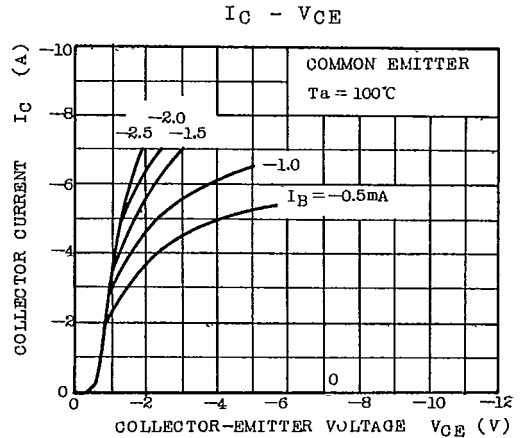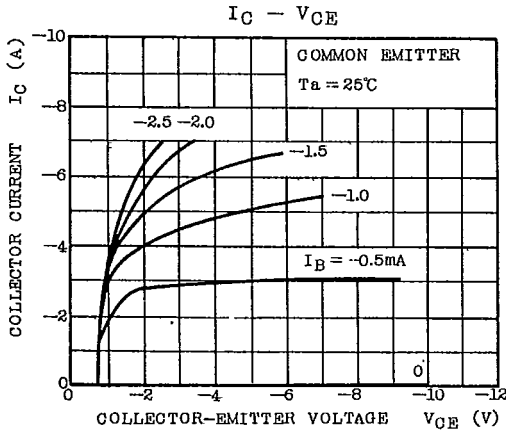

2SB673 • 2SB674 • 2SB675

www.DataSheet4U.com

