

723-8757 +

# Mono-Drive® 4

Round profile screw with 6 spline TORX® drive system with centrally located, cold forged security pin. Removable by dedicated driver only. Recommended for high bond strength applications. Ideal for surface or recessed applications. Ideal for power driver installation and automated assembly.

**HEAD STYLES:** Button and Countersunk.


**THREAD STYLES:** Machine screw and self tapping.

**MATERIALS:** Zinc Plated Steel and A2 Stainless Steel.

**STOCK RANGE:** Machine screws and self tapping in A2 Stainless Steel.

**NOTE:** M8 and M10 in zinc plated 10.9 grade steel from 12mm-60mm length.

# Mono-Drive®

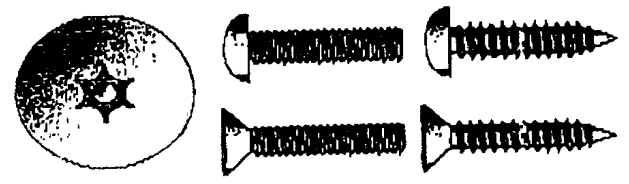

## Standard Stock Range

A2 Stainless Steel							Self Tapping Screws				
Machine Screws											
Length (mm)	M3	M4	M5	M6	M8	M10	Length ins (mm)	No.6 3.5mm	No.8 4.22mm	No.10 4.8mm	No.12 5.5mm
5							1/8 6.4				
8		✓	✓	✓			5/16 8				
10		✓	✓	✓			3/8 9.5				
12		✓	✓	✓	✓		1/2 13	✓	✓		
16		✓	✓	✓			7/16 16				
20		✓	✓	✓	✓		1/2 19	✓	✓	✓	✓
25		✓	✓	✓		✓	3/4 22				
30			✓	✓		✓	1.0 25	✓	✓	✓	✓
35						✓	1 1/4 32				
40				✓		✓	1 1/2 38	✓	✓	✓	✓
45						✓	1 3/4 45				
50				✓		✓	2.0 50			✓	✓
60						✓	2 3/8 60				

