

KR Electronics

General Description


KR 2792-3.25 is a 3.25 MHz bandpass filter. The filter has a minimum 3 dB bandwidth of 1.6 MHz and is designed for a source and load impedance of 50 Ω. Other passband frequencies are available. Please consult the factory.

Features


- 3.25 MHz Center Frequency
- 50 Ω Source and Load

Typical Performance

Passband Amplitude & Group Delay
(1 dB/div and 200 nsec/div)

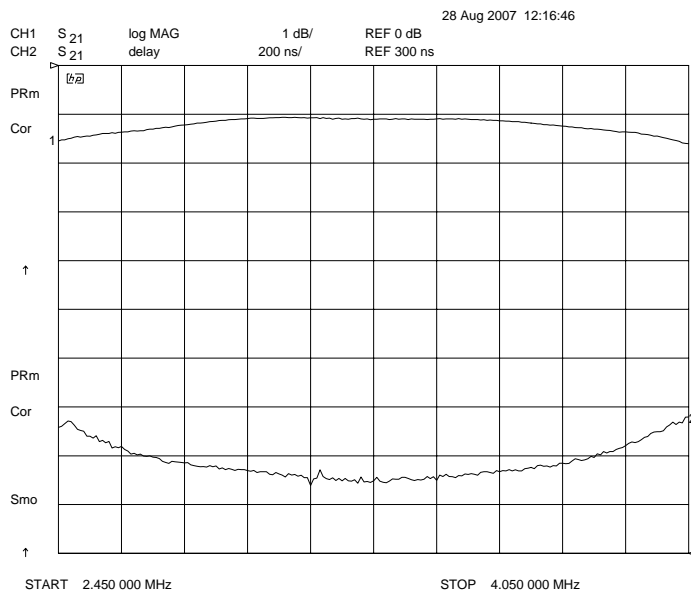

Overall Response
(10 dB/div)

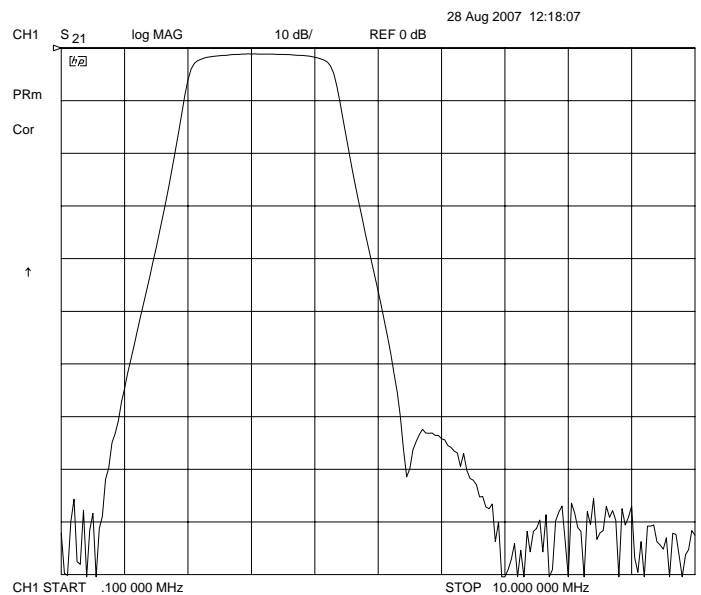

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR Electronics 2792-3.25

Specifications

Parameter	Specification
Filter type	Bandpass
Center Frequency	3.25 MHz
Insertion Loss	< 2.5 dB (1 dB typical)
3 dB Bandwidth	1.6 MHz minimum (2.2 MHz typical)
Attenuation at 0.85 MHz	> 60 dB
Attenuation at 5.65 MHz	> 60 dB
Source and Load	50 Ω

Physical Dimensions



Dimensions in inches
Epoxy Case

