





# MBR20H100CT - MBR20H200CT

20.0 AMPS. Schottky Barrier Rectifiers

## TO-220AB


### Features

- ✧ UL Recognized File # E-326243
- ✧ Plastic material used carries Underwriters Laboratory Classifications 94V-0
- ✧ Metal silicon junction, majority carrier conduction
- ✧ Low power loss, high efficiency
- ✧ High current capability, low forward voltage drop
- ✧ High surge capability
- ✧ For use in power supply – output rectification, power management, instrumentation
- ✧ Guardring for overvoltage protection
- ✧ High temperature soldering guaranteed: 260°C/10 seconds, 0.25"(6.35mm) from case
- ✧ Green compound with suffix "G" on packing code & prefix "G" on datecode

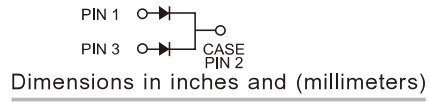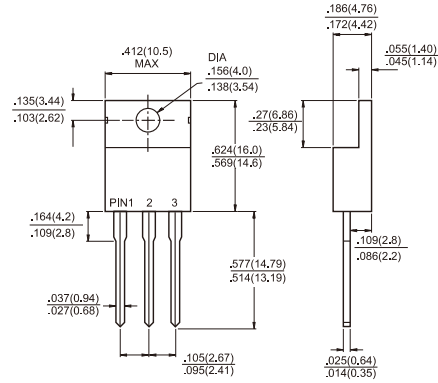

Dimensions in inches and (millimeters)

Marking Diagram



MBR20HXXCT = Specific Device Code  
 G = Green Compound  
 Y = Year  
 WW = Work Week

### Mechanical Data

- ✧ Cases: JEDEC TO-220AB molded plastic body
- ✧ Terminals: Pure tin plated, lead free. solderable per MIL-STD-750, Method 2026
- ✧ Polarity: As marked
- ✧ Mounting position: Any
- ✧ Mounting torque: 5 in. - lbs. max
- ✧ Weight: 1.82 grams

### Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.  
 Single phase, half wave, 60 Hz, resistive or inductive load.  
 For capacitive load, derate current by 20%

Type Number	Symbol	MBR 20H100CT	MBR 20H150CT	MBR 20H200CT	Units
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	100	150	200	V
Maximum RMS Voltage	$V_{RMS}$	70	105	140	V
Maximum DC Blocking Voltage	$V_{DC}$	100	150	200	V
Maximum Average Forward Rectified Current at $T_c=125^\circ\text{C}$	$I_{F(AV)}$	20			A
Peak Repetitive Forward Current (Rated $V_R$ , Square Wave, 20KHz) at $T_c=125^\circ\text{C}$	$I_{FRM}$	20			A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	$I_{FSM}$	150			A
Peak Repetitive Reverse Surge Current (Note 2)	$I_{RRM}$	1.0		0.5	A
Maximum Instantaneous Forward Voltage at: $I_F=10\text{A}, T_A=25^\circ\text{C}$ $I_F=10\text{A}, T_A=125^\circ\text{C}$ $I_F=20\text{A}, T_A=25^\circ\text{C}$ $I_F=20\text{A}, T_A=125^\circ\text{C}$	$V_F$	0.85 0.75 0.95 0.85	0.88 0.75 0.97 0.85		V
Maximum Instantaneous Reverse Current at Rated DC Blocking Voltage (Note 1) @ $T_A=25^\circ\text{C}$	$I_R$	5			uA mA
@ $T_A=125^\circ\text{C}$		2.0			
Voltage Rate of Change (Rated $V_R$ )	dV/dt	10,000			V/uS
Maximum Typical Thermal Resistance (Note 3)	$R_{\theta JC}$	1.5			$^\circ\text{C}/\text{W}$
Operating Junction Temperature Range	$T_J$	-65 to +175			$^\circ\text{C}$
Storage Temperature Range	$T_{STG}$	-65 to +175			$^\circ\text{C}$

Notes: 1. Pulse Test: 300us Pulse Width, 1% Duty Cycle  
 2. 2.0us Pulse Width,  $f=1.0\text{KHz}$   
 3. Mount on Heatsink Size of 2 in x 3 in x 0.25in Al-Plate.

## RATINGS AND CHARACTERISTIC CURVES (MBR20H100CT THRU MBR20H200CT)

FIG.1- FORWARD CURRENT DERATING CURVE

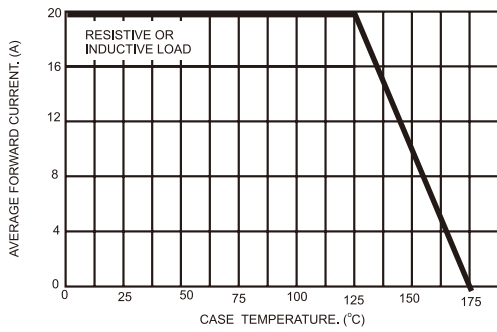


FIG.2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER LEG

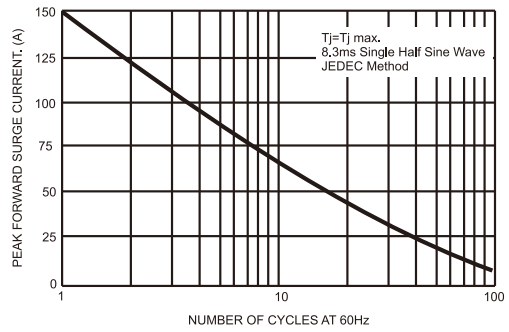


FIG.3- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER LEG

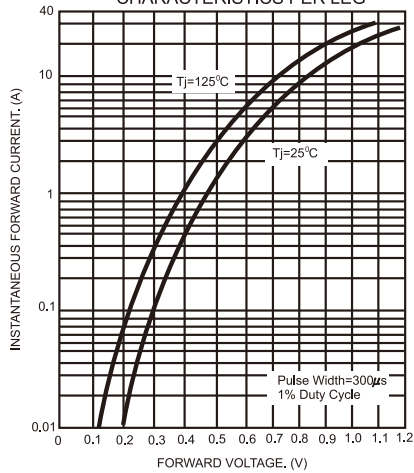


FIG.4- TYPICAL REVERSE CHARACTERISTICS PER LEG

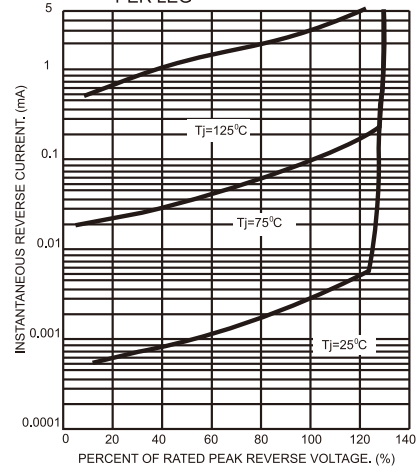


FIG.5- TYPICAL JUNCTION CAPACITANCE PER LEG

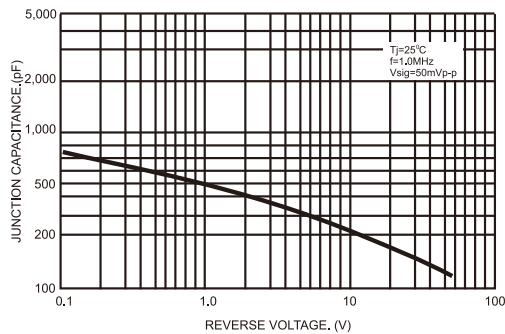


FIG.6- TYPICAL TRANSIENT THERMAL IMPEDANCE PER LEG

