


# Schottky Powermod

## FST16035 – FST16050

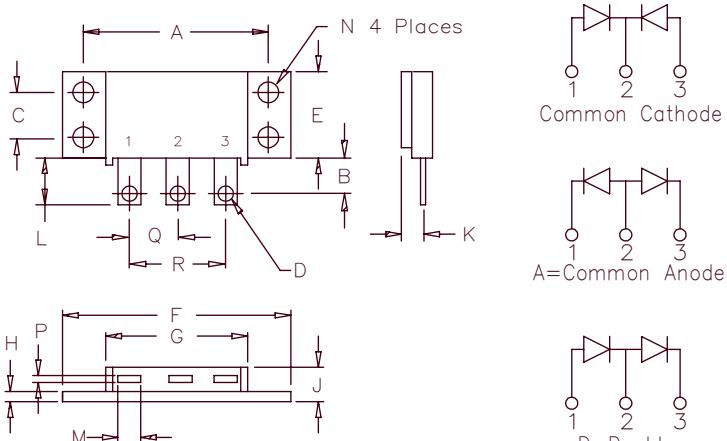

Notes:  
 Baseplate: Nickel plated copper;  
 electrically isolated  
 Pins: Nickel plated copper

Dim.		Inches	Millimeters			
		Min.	Max.	Min.	Max.	Notes
A	1.995	2.005	50.67	50.93		
B	0.300	0.325	7.62	8.26		
C	0.495	0.505	12.57	12.83		
D	0.182	0.192	4.62	4.88		Dia.
E	0.990	1.010	25.15	25.65		
F	2.390	2.410	60.71	61.21		
G	1.500	1.525	38.10	38.70		
H	0.120	0.130	3.05	3.30		
J	---	0.400	---	10.16		
K	0.240	0.260	6.10	6.60 to Lead Q		
L	0.490	0.510	12.45	12.95		
M	0.330	0.350	8.38	6.90		
N	0.175	0.195	4.45	4.95		Dia.
P	0.035	0.045	0.89	1.14		
Q	0.445	0.455	11.30	11.56		
R	0.890	0.910	22.61	23.11		

TO-249

Microsemi Catalog Number	Working Reverse Voltage	Peak Reverse Voltage
FST16035*	35V	35V
FST16040*	40V	40V
FST16045*	45V	45V
FST16050*	50V	50V

\*Add the Suffix A for Common Anode, D for Doubler

- Schottky Barrier Rectifier
- Guard Ring for Reverse Protection
- $\sqrt{V_{RRM}}$  – 35 to 50 Volts
- High Surge Capacity
- Reverse Energy Tested
- ROHS Compliant

### Electrical Characteristics

Average forward current per pkg	$I_F(AV)$ 160 Amps
Average forward current per leg	$I_F(AV)$ 80 Amps
Maximum surge current per leg	$I_{FSM}$ 1200 Amps
Max repetitive peak reverse current per leg	$I_{R(OV)}$ 2 Amps
Max peak forward voltage per leg	$V_{FM}$ .58 Volts
Max peak forward voltage per leg	$V_{FM}$ .74 Volts
Max peak reverse current per leg	$I_{RM}$ 30 mA
Max peak reverse current per leg	$I_{RM}$ 2 mA
Typical junction capacitance per leg	$C_J$ 2300 pF

$T_C = 115^\circ\text{C}$ , Square wave,  $R_{\theta JC} = 0.5^\circ\text{C}/\text{W}$   
 $T_C = 115^\circ\text{C}$ , Square wave,  $R_{\theta JC} = 1.0^\circ\text{C}/\text{W}$   
 8.3 ms, half sine  $T_J = 175^\circ\text{C}$   
 $f = 1 \text{ KHz}, 25^\circ\text{C}, 1\mu\text{sec}$  Square wave  
 $|I_{FM}| = 80A: T_J = 175^\circ\text{C}^*$   
 $|I_{FM}| = 80A: T_J = 25^\circ\text{C}^*$   
 $V_{RRM}, T_J = 125^\circ\text{C}^*$   
 $V_{RRM}, T_J = 25^\circ\text{C}$   
 $V_R = 5.0\text{V}, T_J = 25^\circ\text{C}$

\*Pulse test: Pulse width 300  $\mu\text{sec}$ , Duty cycle 2%

### Thermal and Mechanical Characteristics

Storage temp range	$T_{STG}$	$-55^\circ\text{C}$ to $175^\circ\text{C}$
Operating junction temp range	$T_J$	$-55^\circ\text{C}$ to $175^\circ\text{C}$
Maximum thermal resistance per leg	$R_{\theta JC}$	$1.0^\circ\text{C}/\text{W}$ Junction to case
Maximum thermal resistance per pkg.	$R_{\theta JC}$	$0.5^\circ\text{C}/\text{W}$ Junction to case
Typical thermal resistance (greased)	$R_{\theta CS}$	$0.1^\circ\text{C}/\text{W}$ Case to sink
Mounting torque		15 – 20 inch pounds
Weight		2.5 ounces (71 grams) typical

# FST16035 – FST16050

Figure 1  
Typical Forward Characteristics – Per Leg

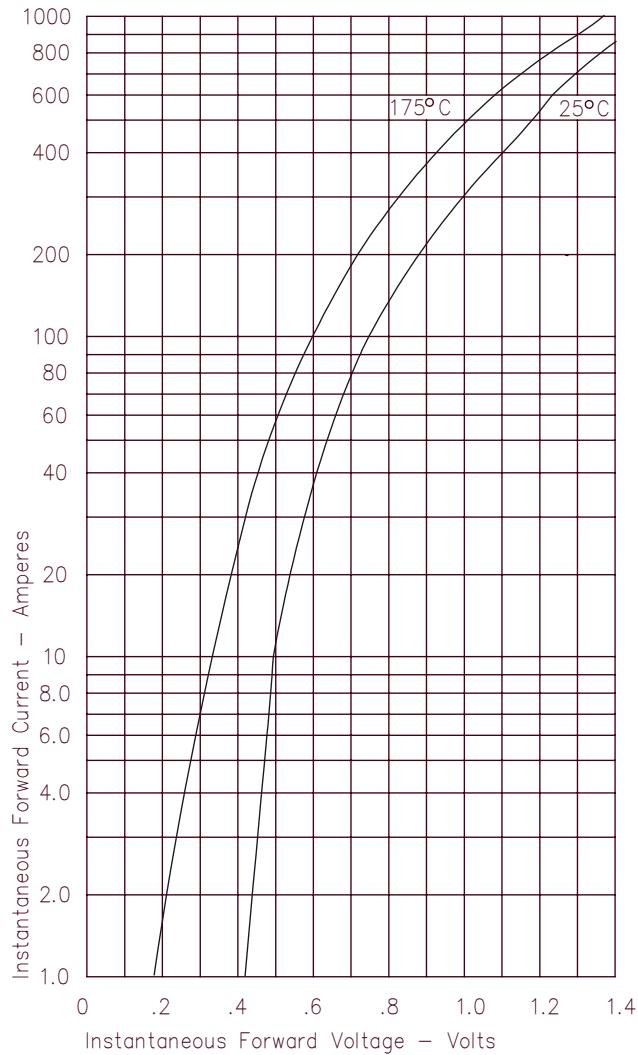


Figure 2  
Typical Reverse Characteristics – Per Leg

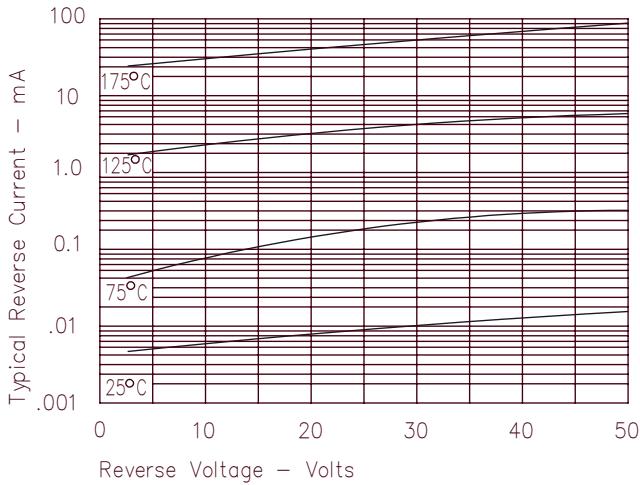


Figure 3  
Typical Junction Capacitance – Per Leg

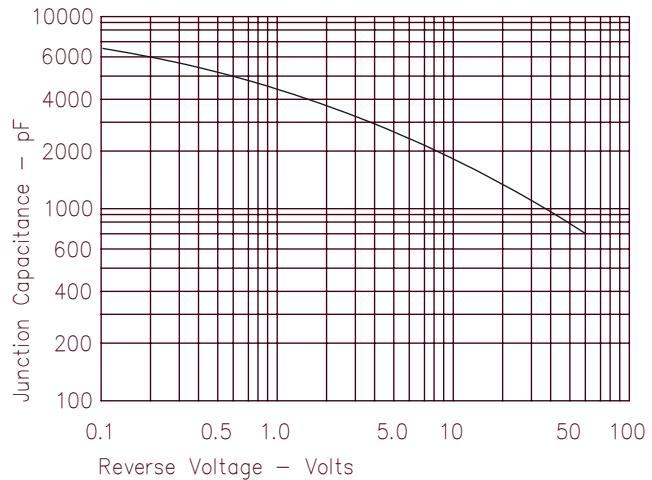


Figure 4  
Forward Current Derating – Per Leg

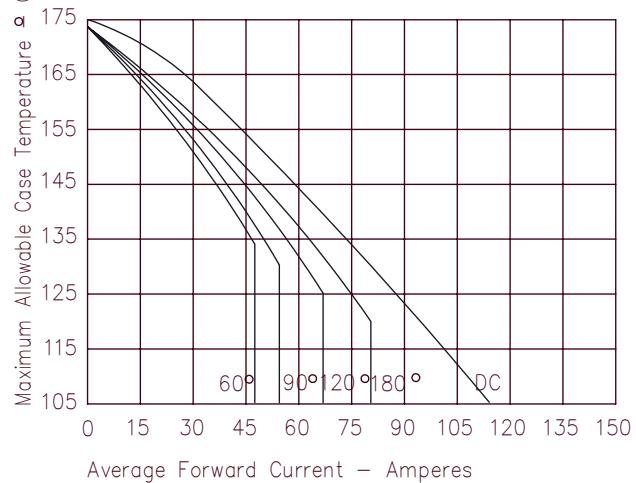


Figure 5  
Maximum Forward Power Dissipation – Per Leg

