

TECHNICAL DATA
DATA SHEET SCP-6141, REV. –
ITAR Controlled Component

24V, 2A RELAY/SOLENOID DRIVER

FEATURES

- HERMETIC PACKAGE (THROUGH-HOLE OR SMT DIP)
- -55°C TO 125°C OPERATION
- MIL-STD-883 SCREENING AVAILABLE
- MIL-PRF-38534 CLASS H LEVEL DESIGN
- SELF-RESETTING SHORT CIRCUIT PROTECTION
- COMMAND AND INHIBIT HCMOS INPUT CONTROL PINS
- OPEN AND SHORT STATUS HCMOS OUTPUT PINS.
- OUTPUT PROTECTION FOR INDUCTIVE KICKBACK

MAXIMUM RATINGS

Parameter	Conditions		Maximum	Units
Input Voltage	-	-	32	Vdc
Operating Temperature Range	-	-	-55 to +150	°C
Storage Temperature Range	-	-	-65 to +150	°C
Short circuit duration	-	-	indefinite	

ELECTRICAL CHARACTERISTICS

All ratings are at $T_C = 25^\circ\text{C}$ unless otherwise specified.

Symbol	Parameter	Conditions	Min.	Max.	Units
Vin	Supply Voltage		18	32	V
VinL	input logic low			0.8	V
VinH	input logic high		3.4	5.5	V
VoutL	output logic low			0.4	V
VoutH	output logic high		4.0		V
tr	rise time			20	µs
tf	fall time			20	µs
Ishort	short circuit current		3.0	4.0	A
Vdrop	Voltage drop			0.6	V


TECHNICAL DATA
DATA SHEET SCP-6141, REV. –

TRUTH TABLE

INH_	CMD_	LOAD	VOUT	OPEN	SHORT
0	0	OPEN	*	1	0
0	0	NORMAL	0	0	0
0	0	SHORT	0	0	0
0	1	OPEN	*	1	0
0	1	NORMAL	0	0	0
0	1	SHORT	0	0	0
1	0	OPEN	Vin	0	0
1	0	NORMAL	Vin	0	0
1	0	SHORT	0	0	1
1	1	OPEN	*	1	0
1	1	NORMAL	*	0	0
1	1	SHORT	0	0	0

*Floating output condition. The output current is limited to 1mA to provide for open circuit sensing when inactive.

BLOCK DIAGRAM

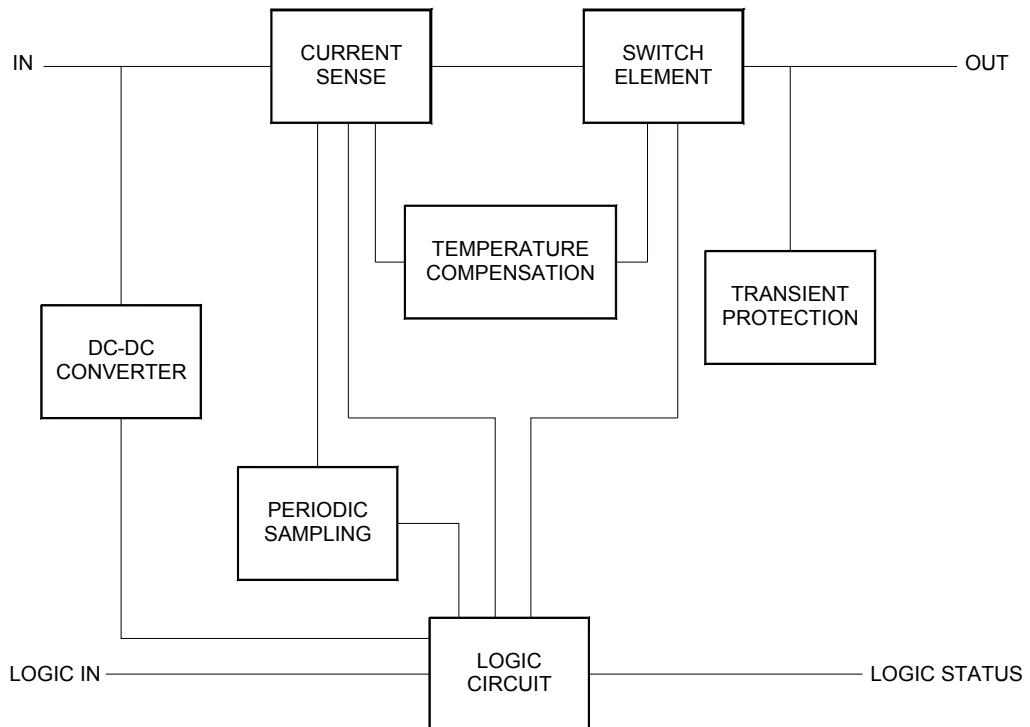


TECHNICAL DATA
DATA SHEET SCP-6141, REV. –

PINOUT TABLE

PIN	FUNCTION
1	Vout
2	Vout
3	Vout
4	CMD_INPUT
5	INH_INPUT
6	GND
7	GND
8	GND
9	NC
10	NC
11	NC
12	SHORT STATUS
13	OPEN STATUS
14	Vin
15	Vin
16	Vin

MECHANICAL DIMENSIONS* (inches) :
(tolerance +/- 0.005 unless otherwise specified)

YYWW = DATE CODE

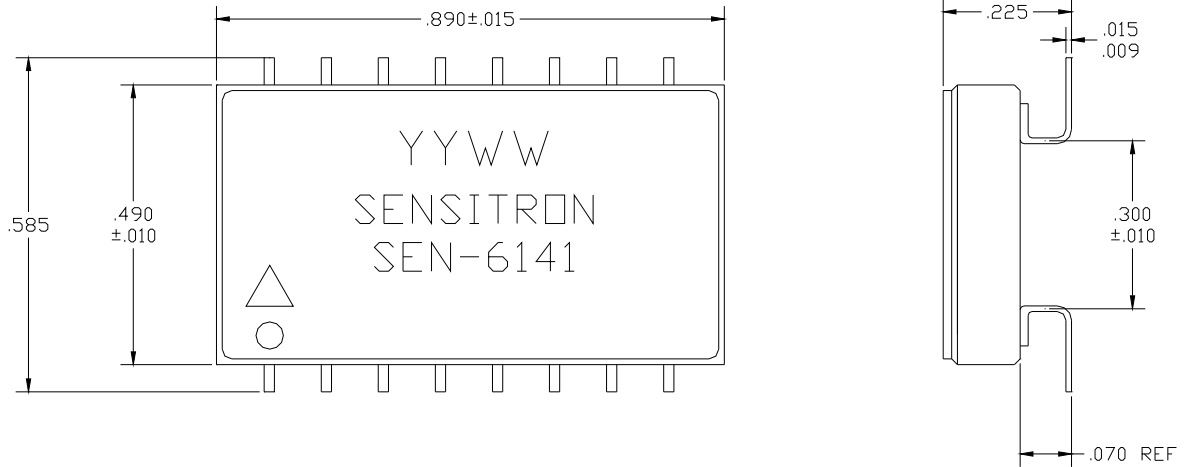

TOLERANCE = ±.005 UNLESS OTHERWISE NOTED

***Surface mount package shown. Through-hole DIP available. Consult factory. Leads available with gold termination or Pb-Sn hot solder dip.**

TECHNICAL DATA
DATA SHEET SCP-6141, REV. –

DISCLAIMER:

1- The information given herein, including the specifications and dimensions, is subject to change without prior notice to improve product characteristics. Before ordering, purchasers are advised to contact the Sensitron Semiconductor sales department for the latest version of the datasheet(s).

2- In cases where extremely high reliability is required (such as use in nuclear power control, aerospace and aviation, traffic equipment, medical equipment, and safety equipment), safety should be ensured by using semiconductor devices that feature assured safety or by means of users' fail-safe precautions or other arrangement.

3- In no event shall Sensitron Semiconductor be liable for any damages that may result from an accident or any other cause during operation of the user's units according to the datasheet(s). Sensitron Semiconductor assumes no responsibility for any intellectual property claims or any other problems that may result from applications of information, products or circuits described in the datasheets.

4- In no event shall Sensitron Semiconductor be liable for any failure in a semiconductor device or any secondary damage resulting from use at a value exceeding the absolute maximum rating.

5- No license is granted by the datasheet(s) under any patents or other rights of any third party or Sensitron Semiconductor.

6- The datasheet(s) may not be reproduced or duplicated, in any form, in whole or part, without the expressed written permission of Sensitron Semiconductor.

7- The products (technologies) described in the datasheet(s) are not to be provided to any party whose purpose in their application will hinder maintenance of international peace and safety nor are they to be applied to that purpose by their direct purchasers or any third party. When exporting these products (technologies), the necessary procedures are to be taken in accordance with related laws and regulations.