

SPECIFICATIONS

Mechanical

Contact Retention Force: 1.0Kg min.

Electrical

Voltage Rating: 750V

Current Rating: 1A

Contact Resistance: 55mΩ max.

Dielectrical Withstanding Voltage: 1000V

Insulation Resistance: 1000MΩ min.

Physical

Housing: LCP, UL 94-0 rated, Ivory White

Contact: Phosphor Bronze

Plating: See "ORDERING INFORMATION"


FUTURE BUS CONNECTOR

1F Series





Header Press Fit Type

2.0mm Pitch

4 Rows

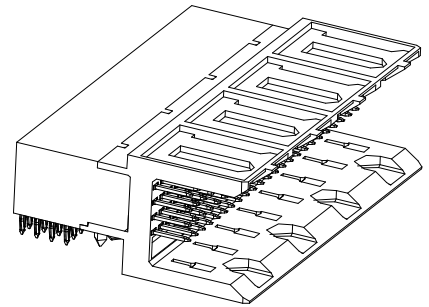

DRAWING

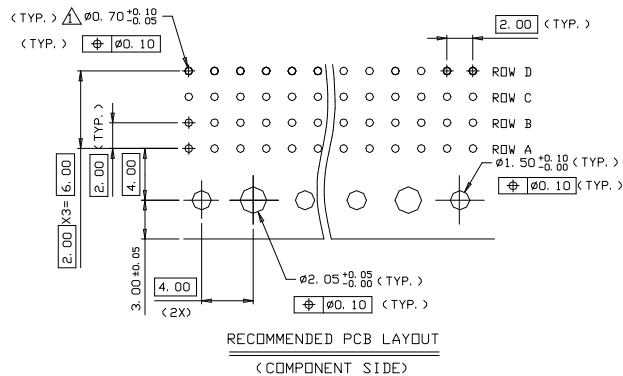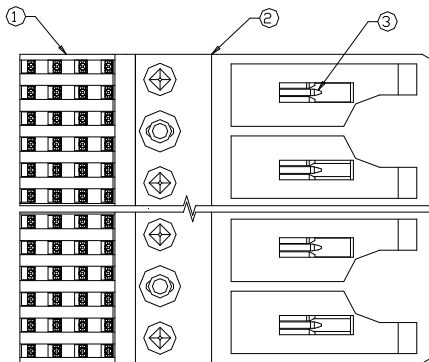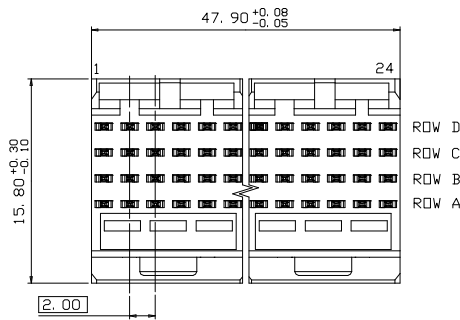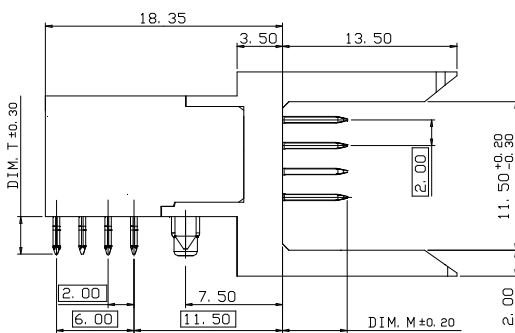

ORDERING INFORMATION

1 F 1 1 * * * * - P * * CO * - * *

POS. NO. (N)
096 : 96 POS.
PLATING SPEC.
A: 10 μ" Pd/Ni
+ GOLD PLATING
TAIL LENGTH (T)
8: 2.9mm
MATING LENGTH (M)
1: 5.00mm

N: TIN/LEAD PLATING ON PRESS FIT AREA
F: LEAD-FREE, SATIN TIN PLATING ON PRESS FIT AREA
PACKAGE TYPE
A: TUBE
N: NONE LUNRICATED
T: NONE LUBRICATED, TWO SIDES PLATING
L: LUBRICATED
R: LUBRICATED, TWO SIDES PLATING