

TRANSISTOR (PNP)


FEATURES

- Complementary Type FMMT493

MARKING:593

MAXIMUM RATINGS (T_a=25°C unless otherwise noted)

Symbol	Parameter	Value	Unit
V _{CBO}	Collector-Base Voltage	-120	V
V _{CEO}	Collector-Emitter Voltage	-100	V
V _{EBO}	Emitter-Base Voltage	-5	V
I _C	Collector Current	-1	A
P _C	Collector Power Dissipation	250	mW
R _{θJA}	Thermal Resistance From Junction To Ambient	500	°C/W
T _j	Junction Temperature	150	°C
T _{stg}	Storage Temperature	-55~+150	°C

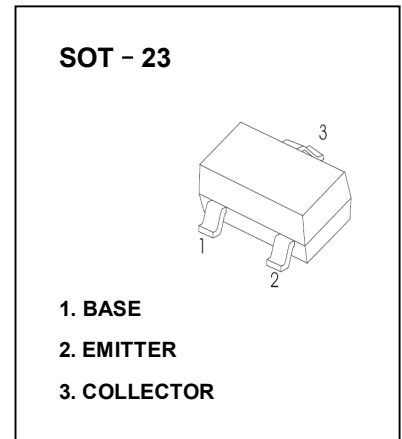

ELECTRICAL CHARACTERISTICS (T_a=25°C unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	V _{(BR)CBO}	I _C =-100μA, I _E =0	-120			V
Collector-emitter breakdown voltage	V _{(BR)CEO}	I _C =-10mA, I _B =0	-100			V
Emitter-base breakdown voltage	V _{(BR)EBO}	I _E =-100μA, I _C =0	-5			V
Collector cut-off current	I _{CBO}	V _{CB} =-100V, I _E =0			-0.1	μA
Collector cut-off current	I _{CES}	V _{CE} =-100V, I _E =0			-0.1	μA
Emitter cut-off current	I _{EBO}	V _{EB} =-4V, I _C =0			-0.1	μA
DC current gain	h _{FE(1)} *	V _{CE} =-5V, I _C =-1mA	100			
	h _{FE(2)} *	V _{CE} =-5V, I _C =-250mA	100			
	h _{FE(3)} *	V _{CE} =-5V, I _C =-0.5A	100		300	
	h _{FE(4)} *	V _{CE} =-5V, I _C =-1A	50			
Collector-emitter saturation voltage	V _{CE(sat)1} *	I _C =-250mA, I _B =-25mA			-0.2	V
	V _{CE(sat)2} *	I _C =-500mA, I _B =-50mA			-0.3	V
Base-emitter saturation voltage	V _{BE(sat)} *	I _C =-500mA, I _B =-50mA			-1.1	V
Base-emitter voltage	V _{BE} *	V _{CE} =-5V, I _C =-1mA			-1	V
Transition frequency	f _T	V _{CE} =-10V, I _C =-50mA, f=100MHz	50			MHz
Collector output capacitance	C _{ob}	V _{CB} =-10V, I _E =0, f=1MHz			5	pF

*Pulse test: pulse width ≤300μs, duty cycles ≤ 2.0%.