




**Pomona  
ACCESS**

**FAX ON DEMAND** This symbol indicates immediate Fax-On-Demand Technical Information is available. Dial (U.S.) (800) 444-6785, (Outside U.S.) (909) 469-2991. Enter the Pomona Access number (shown in italics) when prompted.

Coaxial Cable Assemblies and Breakouts

### BNC MALE TO MINIGRABBER® TEST CLIPS

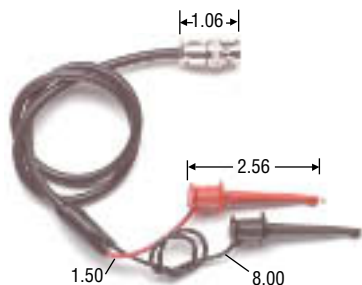

<i>Pomona ACCESS</i>	Part No.	Length	PRICE
90328	3787-C-18	18"	17.10
	3787-C-24	24"	17.10
	3787-C-36	36"	17.10
	3787-C-48	48"	18.50
	3787-C-60	60"	18.50

RATING: 300 VRMS Max., +50°C (+122°F) Max.  
CABLE TYPE: RG58C/U  
BNC: Body: Brass, Tarnish Resistant Plating  
Dielectric: PTFE  
Center Contact: Gold Plated Brass


### BNC MALE WITH MOLDED STRAIN RELIEF TO MINIGRABBER® TEST CLIPS



<i>Pomona ACCESS</i>	Part No.	Cable Type	Length	PRICE
90458	5187-C-24	RG 58C/U, .195" O.D.	24"	14.50
	5187-C-36		36"	14.50
	5187-C-48		48"	14.50
	5187-C-60		60"	14.50
	5187-K-24	RG 174/U, .100" O.D.	24"	20.15
	5187-K-36		36"	20.15
	5187-K-48		48"	20.15
	5187-K-60		60"	20.15

RATING: 300 VRMS Max., +50°C (+122°F) Max.  
BNC Connector and strain relief materials same as Model 2249-C (p. 33).


### BNC MALE WITH MOLDED STRAIN RELIEF TO MINIPINER® TEST CLIPS



<i>Pomona ACCESS</i>	Part No.	Length	PRICE
90641	5423-C-18	18"	15.75
	5423-C-24	24"	15.75
	5423-C-36	36"	15.75
	5423-C-48	48"	16.80
	5423-C-60	60"	16.80

RATING: 300 VRMS Max., +50°C (+122°F) Max.  
CABLE TYPE: RG58C/U, .195" O.D.  
BNC Connector and strain relief materials same as Model 2249-C (p. 33).


### BNC MALE WITH MOLDED STRAIN RELIEF TO SMD GRABBER® TEST CLIPS



<i>Pomona ACCESS</i>	Part No.	Length	PRICE
90465	5304-K-24	24"	20.55
	5304-K-36	36"	20.55

RATING: 150 VRMS Max., +50°C (+122°F) Max.  
CABLE TYPE: RG174/U, .100" O.D.  
BNC Connector and strain relief materials same as Model 2249-C (p. 33).


### BNC MALE WITH MOLDED STRAIN RELIEF TO MICROGRABBER® TEST CLIPS

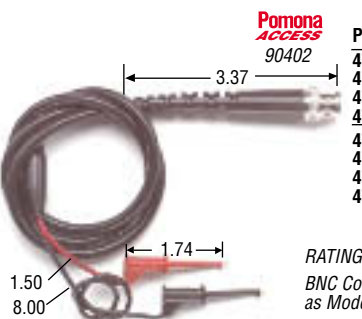

<i>Pomona ACCESS</i>	Part No.	Cable Type	Length	PRICE
90402	4777-C-24	RG 58C/U, .195" O.D.	24"	16.80
	4777-C-36		36"	16.80
	4777-C-48		48"	16.80
	4777-C-60		60"	16.80
	4777-K-24	RG 174/U, .100" O.D.	24"	22.60
	4777-K-36		36"	22.60
	4777-K-48		48"	23.75
	4777-K-60		60"	23.75

RATING: 150 VRMS Max., +50°C (+122°F), Max.  
BNC Connector and strain relief materials same as Model 2249-C (p. 33).

### BNC MALE WITH MOLDED STRAIN RELIEF TO MAXIGRABBER® TEST CLIPS



<i>Pomona ACCESS</i>	Part No.	Length	PRICE
90384	4648-C-24	24"	21.90
	4648-C-36	36"	21.90
	4648-C-48	48"	22.60
	4648-C-60	60"	23.20

RATING: 300 VRMS Max., +50°C (122°F)  
CABLE TYPE: RG58C/U, .195" O.D.  
BNC Connector and strain relief materials same as Model 2249-C (p. 33).

### BNC MALE WITH MOLDED STRAIN RELIEF TO ALLIGATOR TEST CLIPS



<i>Pomona ACCESS</i>	Part No.	Length	PRICE
90364	4531-C-18	18"	13.90
	4531-C-24	24"	13.90
	4531-C-30	30"	13.90
	4531-C-36	36"	13.90
	4531-C-48	48"	15.55
	4531-C-60	60"	15.55

RATING: 150 VRMS +50°C (+122°F)  
CABLE TYPE: RG58C/U, .195" O.D.  
Jaws open to .300" Max.  
BNC Connector and strain relief materials same as Model 2249-C (p. 33).

### BNC MALE WITH MOLDED STRAIN RELIEF TO MINIGATOR® TEST CLIPS



<i>Pomona ACCESS</i>	Part No.	Length	PRICE
90595	4532-C-18	18"	14.70
	4532-C-24	24"	14.70
	4532-C-30	30"	14.70
	4532-C-36	36"	14.70
	4532-C-48	48"	15.75
	4532-C-60	60"	15.75

RATING: 45 VRMS Max., +50°C (+122°F) Max.  
CABLE TYPE: RG58C/U, .195" O.D.  
Jaws open to .187" Max.  
BNC Connector and strain relief materials same as Model 2249-C (p. 33).