

FEATURES AND SPECIFICATIONS

Features and Benefits

- Sizes 2 to 11 circuits
- Second circuit blanked for polarization
- Other plating options available

Reference Information

Packaging: Bag
 UL File No.: E29179
 CSA File No.: LR19980
 Mates With: 5196-N and 5265-N housings
 Designed In: Millimeters


Electrical

Voltage: 250V
 Current: 7.0A
 Contact Resistance: 10mΩ max.
 Dielectric Withstanding Voltage: 1500V AC/1 min.
 Insulation Resistance: 1000 MΩ min.


Physical

Housing: 6/6 nylon, UL 94V-2
 Contact: Brass, 1.14mm (.045") square
 Plating: Tin
 Operating Temperature: -40 to +105°C

molex® 3.96mm (.156") Pitch SPOX™ Header 5275-NA Vertical



CATALOG DRAWING (FOR REFERENCE ONLY)

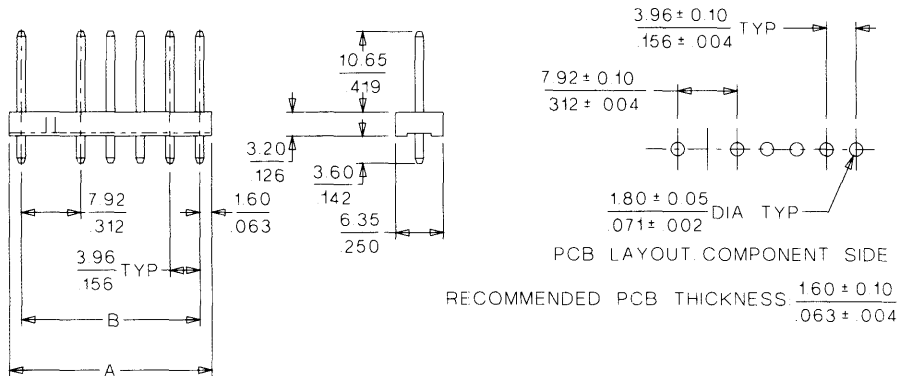

ORDERING INFORMATION AND DIMENSIONS

Circuits	Order No.	Dimension	
		A	B
2	09-67-4022	11.12 (.437)	7.92 (.312)
3	09-67-4032	15.08 (.594)	11.88 (.467)
4	09-67-4042	19.04 (.750)	15.84 (.623)
5	09-67-4052	23.00 (.906)	19.80 (.779)
6	09-67-4062	26.96 (1.061)	23.76 (.935)
7	09-67-4072	30.92 (1.217)	27.72 (1.091)
8	09-67-4082	34.88 (1.373)	31.68 (1.247)
9	09-67-4092	38.84 (1.529)	35.64 (1.403)
10	09-67-4102	42.80 (1.685)	39.60 (1.559)
11	09-67-4112	46.76 (1.841)	43.56 (1.714)

D
 3.00 to 7.92mm (.118 to .312") Pitch