

RoHS Compliant Product  
A suffix of "-C" specifies halogen & lead-free


## FEATURES

- Ideal for surface mount applications
- Easy pick and place
- Built-in strain relief
- Low forward voltage drop

## PACKAGING INFORMATION

- Case: Molded Plastic
- Epoxy: UL 94V-0 Rate Flame Retardant
- Metallurgically bonded construction
- Polarity: Color Band Denotes Cathode End
- Mounting Position: Any
- Weight: 0.0630 g (approximate)

### SMA

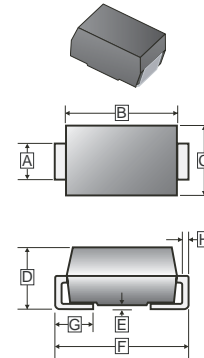

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	1.25	1.65	E	0.051	0.203
B	3.99	4.60	F	4.78	5.28
C	2.50	2.90	G	0.76	1.52
D	1.98	2.44	H	0.152	0.305

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.  
 Single phase half wave, 60Hz, resistive or inductive load.  
 For capacitive load, derate current by 20%.


TYPE NUMBER	SYMBOL	SM1200A	UNITS
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	200	V
Working Peak Reverse Voltage	$V_{RWM}$	200	
Maximum DC Blocking Voltage	$V_R$	200	
Maximum Average Forward Rectified Current See Fig. 1	$I_{F(AV)}$	1.0	A
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	$I_{FSM}$	25	A
Maximum Instantaneous Forward Voltage $I_{FM}=1A$ $T_A=25^\circ C$ $I_{FM}=1A$ $T_A=125^\circ C$	$V_F$	0.9 0.72	V
Maximum DC Reverse Current @ $T_A = 25^\circ C$	$I_R$	30	uA
At Rated DC Blocking Voltage @ $T_A = 125^\circ C$		5	
Typical Junction Capacitance (Note1)	$C_J$	50	pF
Typical Thermal Resistance	$R_{\theta JL}$	45	°C/W
Operating Temperature Range	$T_J$	-50 ~ + 150	°C
Storage temperature	$T_{STG}$	-65 ~ + 175	°C

### NOTES:


1. Measured at 1MHz and applied reverse voltage of 4.0 V D.C.
2. Thermal Resistance Junction to Lead.

**RATINGS AND CHARACTERISTIC CURVES**


Typical Forward Current Derating Curve

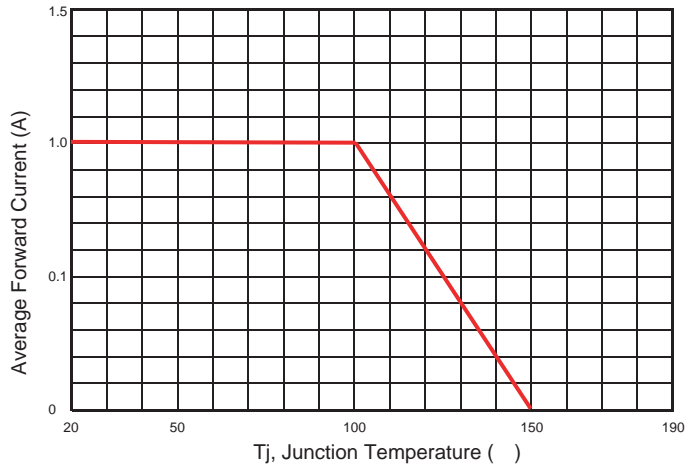


Typical Forward Characteristic

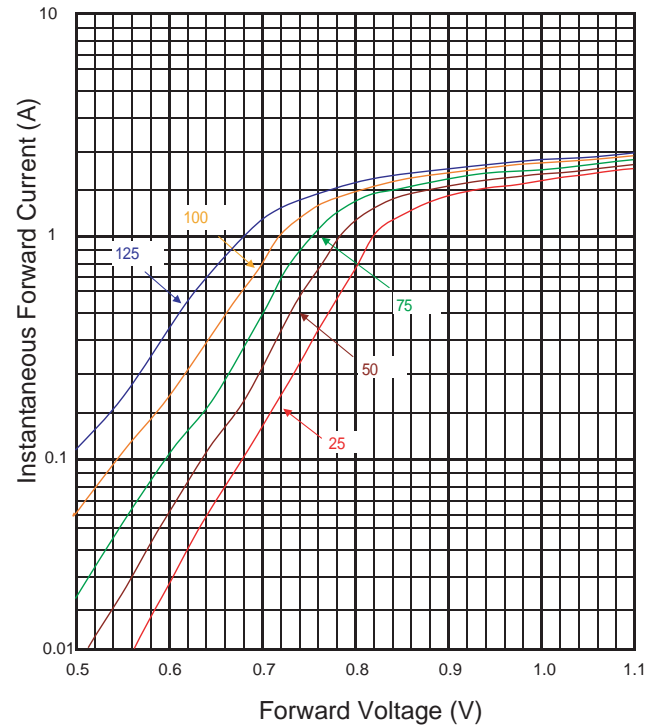

Maximum Non- Repetitive Forward Surge Current

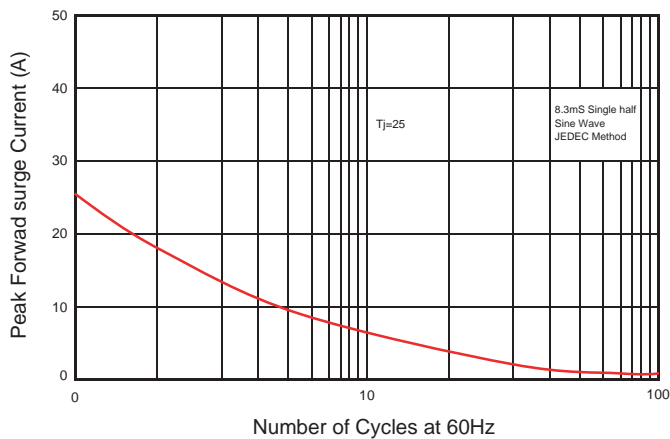

Typical Reverse Characteristic

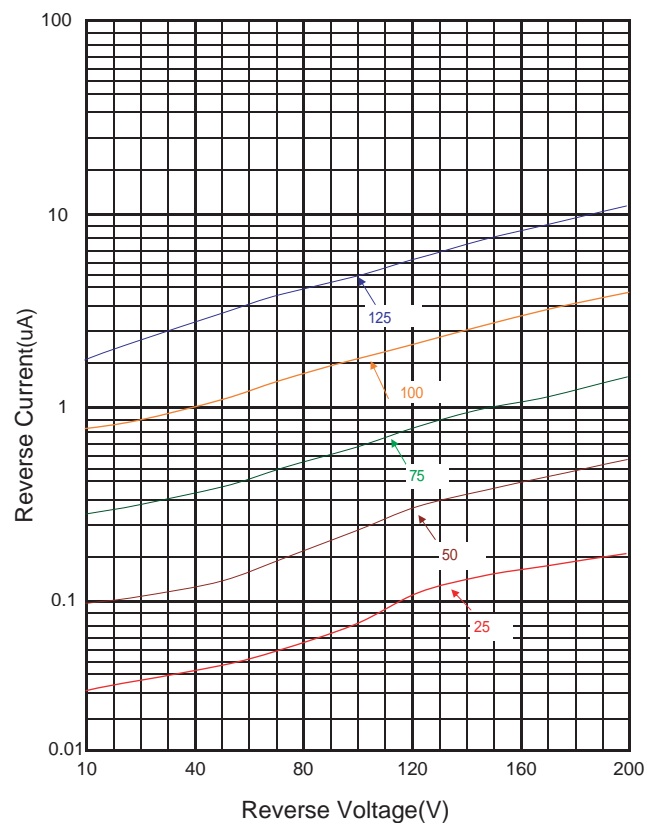

Typical Junction Capacitance

