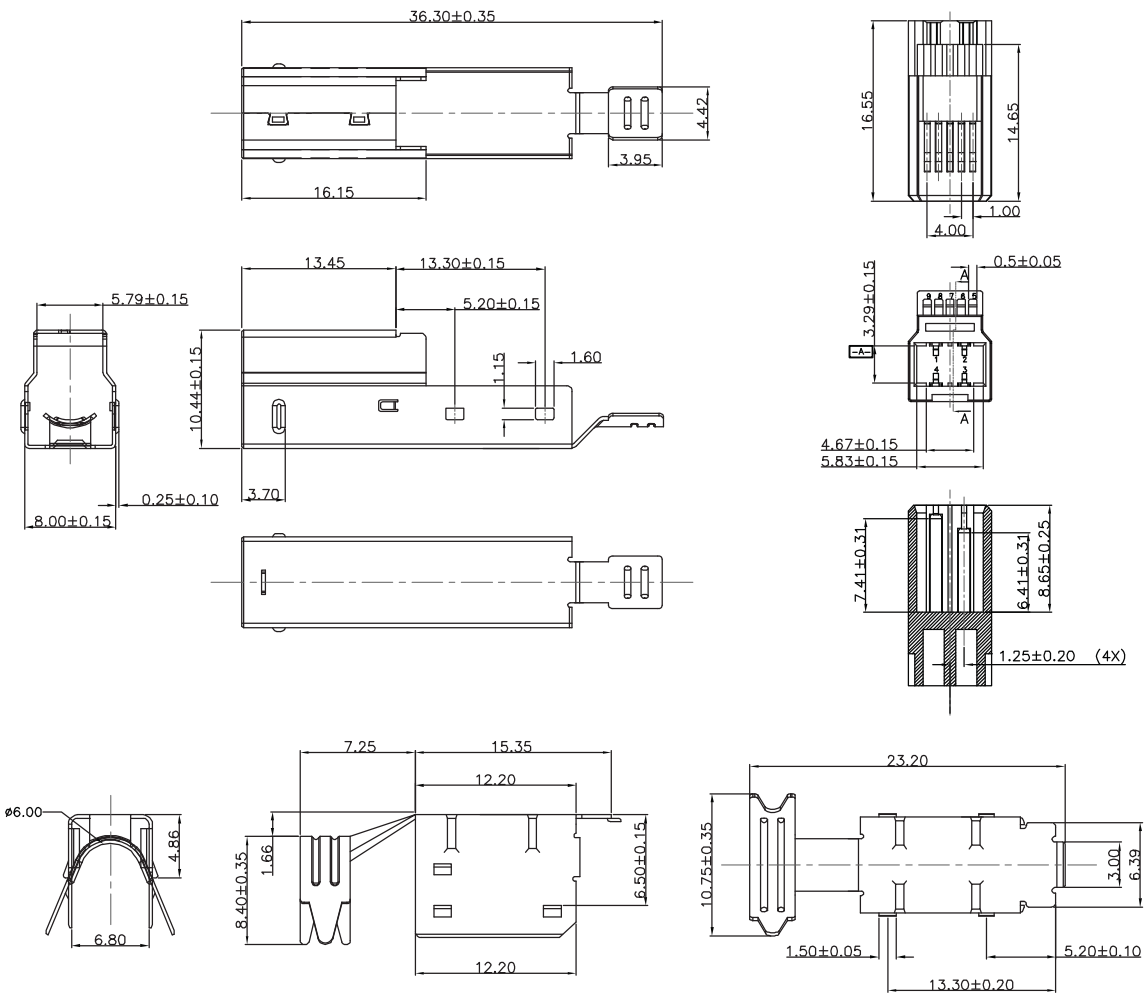

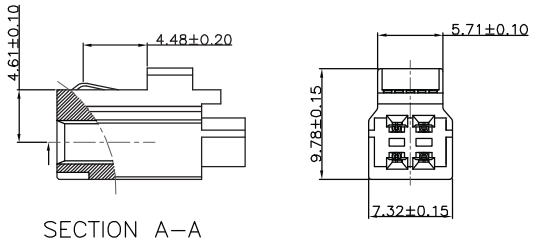

Material:

- Housing: PBT, UL94V-0
- Shell: SPCC.T=0.30MM
- Contact: C2680 T=0.20MM 4Pcs
  C5210 T=0.25MM 5Pcs
- Contact Plate: Gold Plate 15μ"
- Shell: Nickel over all plating

Electrical:

- Dielectric withstanding voltage: 100V AC (RMS)
- Contact Resistance:
  30MΩ Max for Pin1 & Pin4
  50MΩ Max for other contacts
- Insulation Resistance: 100MΩ
- Temperature Range: -20°C ~ +85°C

Mechanical:

- Insertion Force: 35 Newtons Maximum
- Extraction Force: 10 Newtons Minimum

Unit: MM±0.20MM

Scale	1:1						Name
TOLERANCE					Drawn	10.19.11	Chappell
X.X	±0.40				Approved		
X.XX	±0.25						
X.XXX	±0.15						
Angle	±3°						
			Modification	Date	Name		

Item No.

A-USBPB-3-R

Title

USB 3.0 Assembly Type - B connector type

Drawing No.

rev00

Replace

Sheet

RoHS Complaint

ASSMANN WSW components