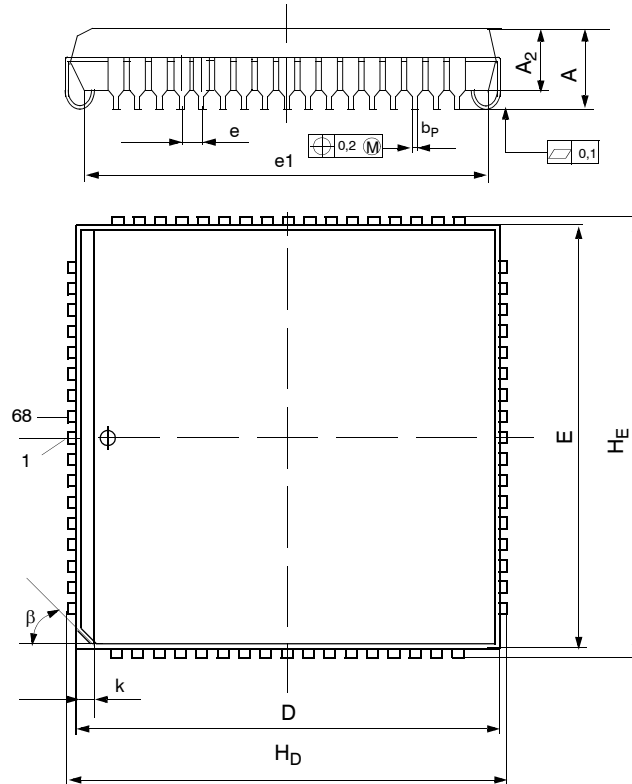


Dimensions in millimetres

Based on IEC 191-2Q: Type 112E12

1 Dimensions

Dimensions of Sub-Group B1	
A_{max}	5,10
b_{Pmin}	0,33
b_{Pmax}	0,53
e_{nom}	1,27
H_{Dmin}	25,00
H_{Dmax}	25,27
H_{Emin}	25,00
H_{Emax}	25,27

Dimensions of Sub-Group C1	
A_{min}	4,19
A_{2min}	3,10
A_{2max}	3,91
D_{min}	24,10
D_{max}	24,33
E_{min}	24,10
E_{max}	24,33
k_{min}	1,00
β	45°
e_{1min}	22,60
e_{1max}	23,62

- 2 Weight** $\leq 4,8$ g
- 3 Package Body Material** Low Stress Epoxy
- 4 Lead Material** FeNi-Alloy or Cu-Alloy
- 5 Lead Finish** solder plating
- 6 Lead Form** J-bends

Zentrum Mikroelektronik Dresden AG		
Editor: signed Schoder	Date 13.11.1995	Doc-No. QS-000709-HD-02
Check: signed Wilde	Quality signed Lorenz:	