

FEATURES

- Cispr 22'B', Vcci'B', Fcc'B' Compliance
- Light Weight: 110g only
- Efficiency 62%~74%
- Over-Voltage Protective Installation
- Short-circuit Protective Installation
- Protection Type: Auto-Recover
- Operating Temperature 0°C~40°C




SPECIFICATION


| Item \ Model | SA0104~07 | SA013V3 | SA0105 | SA0106 | SA0109 | SA0112 |
|-------------------------|----------------|---------------------------------|--------------------|-------------|-------------|-------------|
| Output Voltage | +4V~7V | +3.3V | +5V | +6V | +9V | +12V |
| Output Rating | 6W Max | 1.5A | 1.4A | 1.2A | 0.8A | 0.6A |
| Input Voltage | AC 90~264V | | | | | |
| Input Frequency | 47~63Hz | | | | | |
| Input Current | 0.3A Maximum | | | | | |
| Inrush Current | 30A Maximum | | | | | |
| Line Regulation | 2% Maximum | | | | | |
| Load Regulation | ± 5% | | | | | |
| Ripple & Noise | 1% Maximum | | | | | |
| Efficiency | 67% Typical | 62% Typical | 67% Typical | 69% Typical | 72% Typical | 74% Typical |
| Temperature Coefficient | 0.05%/°C | | | | | |
| Over-Voltage Protection | 8V~14V Maximum | 7V Maximum | 10V Maximum | 12V Maximum | 18V Maximum | 24V Maximum |
| Operating Temperature | 0~40°C | | | | | |
| Storage Temperature | -20~85°C | | | | | |
| Safety Description | Fig. A | UL, CUL, CB, LPS, CE, BSMI, PSE | | | | |
| | Fig. B | CE | | | | |
| | Fig. C | LPS, CE, BSMI | BSI, LPS, CE, BSMI | | | |
| | Fig. D | TUV, CB, LPS, CE, BSMI | | | | |

(*): Under Development (I/P): In Process

ORDERING INFORMATION

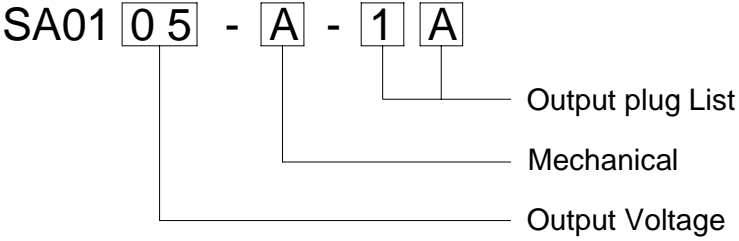

MECHANICAL

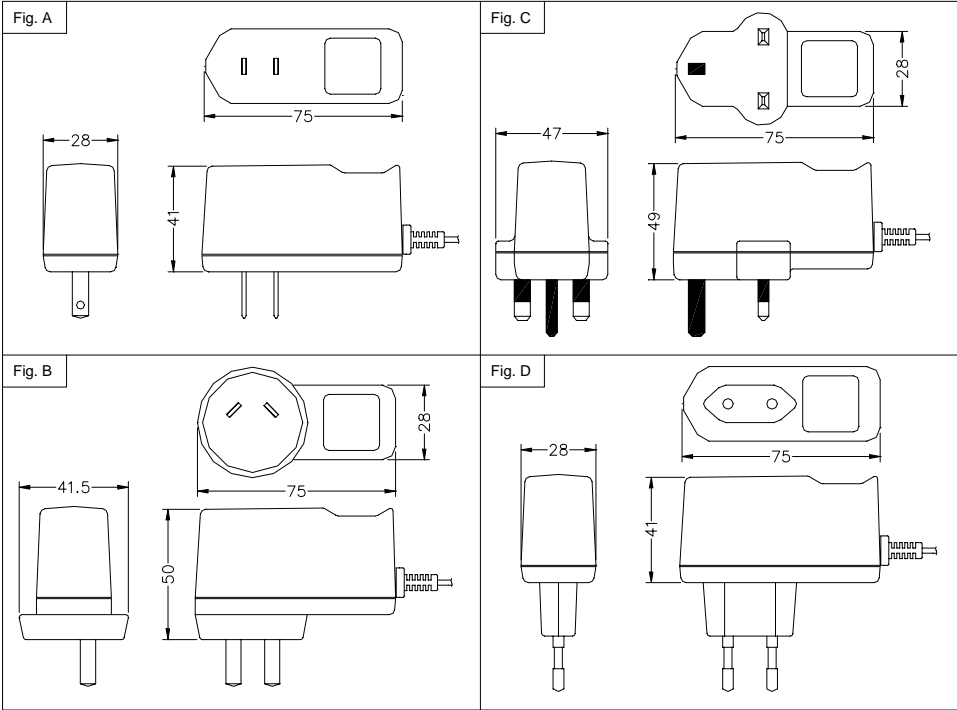

Unit: m.m.

Standard Output Cable:
3.3V: 18AWG, UL SPT-1, 1800mm.
4V~12V: 20AWG, UL 2468, 1800mm.



Bothhand USA. e-mail: sales@bothhandusa.com <http://www.bothhand.com>

462 Boston St - Topsfield, MA 01983 - Phone: 978-887-8050 - Fax: 978-887-5434