




- Oscillator CRB400E series for D.T.M.F
- 调频立体声用CRB456F系列
- 电视执行信号合成电路用CRB503F系列
- D.T.M.F振荡电路用CRB480E系列

⊕ DIMENSIONS(Unit:mm) 外形尺寸(单位:毫米)

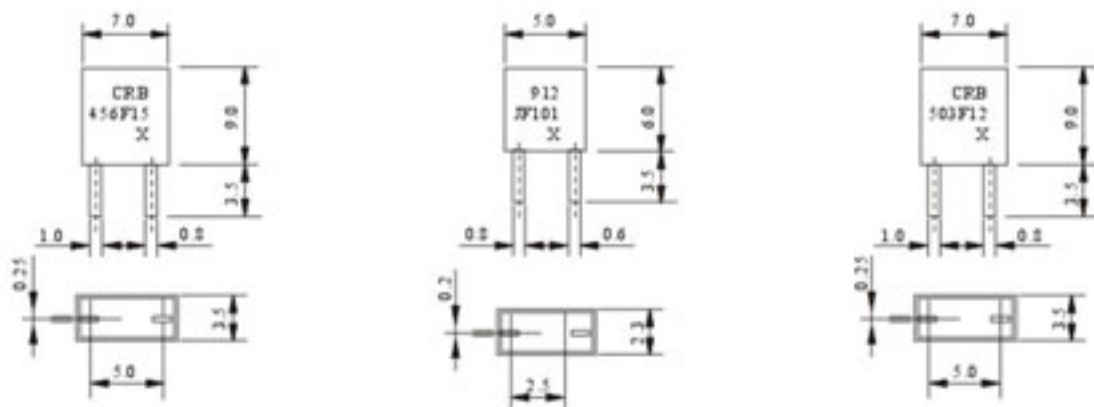

⊕ PRINCIPAL PARAMETERS 主要参数

Model 型号	Freq. Accuracy 频率精度	Applied IC 应用的IC
CRB456F14	19.000KHz \pm 38Hz	TA7413AP(TOSHIBA)
CRB456F15	19.000KHz \pm 38Hz	LA3430(SANYO)
CRB456F16	19.000KHz \pm 38Hz	TA8122AN(TOSHIBA)
CRB456F18	19.000KHz \pm 38Hz	TA8132AN(TOSHIBA)
CRB456F23	456KHz \pm 0.25%	LA1886(SANYO)
CRB912JF101	918.5KHz \pm 0.3%	AN7291(MATSUSHITA)

Model 型号	Freq. Accuracy 频率精度
CRB503F2	503.5 \pm 2KHz
CRB503F5	504.5 \pm 2KHz
CRB503F6	519 \pm 2KHz
CRB503F10	15.734KHz \pm 0.5%
CRB503F12	503.5 \pm 2KHz
CRB503F15	505.1 \pm 2KHz
CRB503F30	503.5 \pm 1.5KHz
CRB503F38	15.734KHz \pm 62KHz
CRB500F2	500.0 \pm 2KHz
CRB500F9	500.0 \pm 2KHz
CRB500F13	500.0 \pm 2KHz
CRB500F25	15.680KHz \pm 0.4%
CRB500F40	15.680KHz \pm 0.4%
CRB500F55	15.680KHz \pm 0.4%

Model 型号	Freq. Accuracy 频率精度	Applied IC 应用的IC
CRB480E14	+0.2%,-0.4%	TC31018P(TOSHIBA)