


Power Inductors for Critical Applications ST598PTA

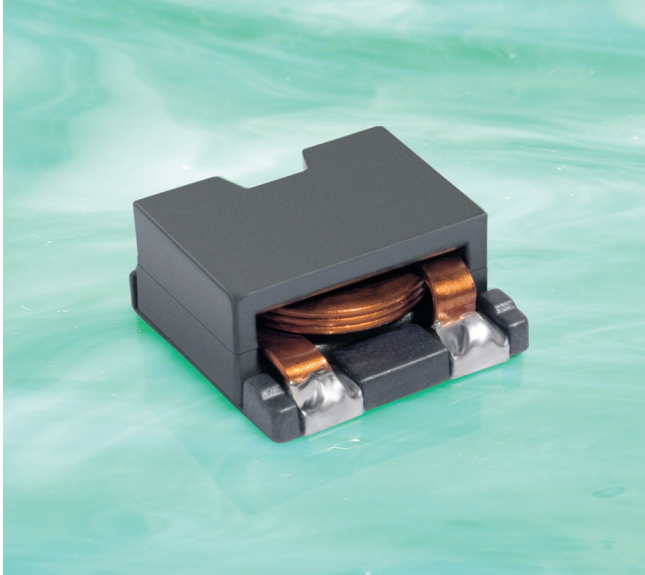

- Exceptionally high current carrying capability (up to 43 Amps) and very low DC resistance
- Magnetic shielding allows high density mounting; flat wire winding keeps the overall height to just 6 mm

Core material Ferrite

Terminations Terminals 1 and 2: Tin-silver over tin over nickel over phos bronze; Terminal 3: Matte tin over nickel over phos bronze. Other terminations available at additional cost.

Weight 2.6 – 2.8 g

Ambient temperature –55°C to +85°C with Irms current, +85°C to +125°C with derated current

Storage temperature Component: –55°C to +125°C.
Tape and reel packaging: –40°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Packaging 500 per 13" reel; Plastic tape: 24 mm wide, 0.4 mm thick, 16 mm pocket spacing, 6.6 mm pocket depth

Part number ¹	Inductance ² ±10% (µH)	DCR (mOhm) ³		SRF (MHz) ⁴		Isat (A) ⁵			Irms (A) ⁶	
		typ	max	min	typ	10% drop	20% drop	30% drop	20°C rise	40°C rise
ST598PTA331KLZ	0.33	0.77	0.85	140	200	36	41	43	13.0	16.9
ST598PTA651KLZ	0.65	0.77	0.85	112	160	23	27	28	13.0	16.9
ST598PTA102KLZ	1.0	2.36	2.60	52.5	75.0	32	33	33.5	9.5	13.0
ST598PTA182KLZ	1.8	2.36	2.60	35.0	50.0	17	19	20	9.5	13.0
ST598PTA272KLZ	2.7	2.36	2.60	29.4	42.0	12	13	14	9.5	13.0
ST598PTA402KLZ	4.0	5.50	6.05	23.8	34.0	11	12	13	7.1	9.4
ST598PTA472KLZ	4.7	5.50	6.05	22.4	32.0	9.5	11	12	7.1	9.4
ST598PTA602KLZ	6.0	5.50	6.05	19.6	28.0	8.0	9.0	9.5	7.1	9.4
ST598PTA802KLZ	8.0	9.83	10.81	18.2	26.0	7.5	8.5	9.0	5.5	7.6
ST598PTA103KLZ	10	9.83	10.81	16.8	24.0	6.2	7.0	7.5	4.4	7.2

1. When ordering, please specify **termination** and **testing** codes.

ST598PTA103KLZ

Termination: L = Terminals 1 and 2: Tin-silver over tin over nickel over phos bronze; Terminal 3: Matte tin over nickel over phos bronze
Special order, added cost: T = All terminals: copper (95.5/4/0.5) over tin over nickel over phos bronze or
S = All terminals: non-RoHS tin-lead (63/37) over tin over nickel over phos bronze.

Testing: Z = COTS
H = Screening per Coilcraft CP-SA-10001
N = Screening per Coilcraft CP-SA-10004

2. Inductance measured at 100 kHz, 0.1 Vrms, 0 Adc on an Agilent/HP 4284A or equivalent.

3. DCR measured on a micro-ohmmeter.

4. SRF measured using an Agilent/HP 8753D network analyzer.

5. Typical DC current at which the inductance drops the specified amount from its value without current.

6. Typical current that causes a the specified temperature rise from 25°C ambient.

7. Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

Coilcraft CPS
CRITICAL PRODUCTS & SERVICES

1102 Silver Lake Road
Cary, IL 60013
Phone 800-981-0363


Fax 847-639-1508
Email cps@coilcraft.com
www.coilcraft-cps.com

Document ST290-1 Revised 09/13/12


This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.

ST598PTA Series






Typical L vs Frequency

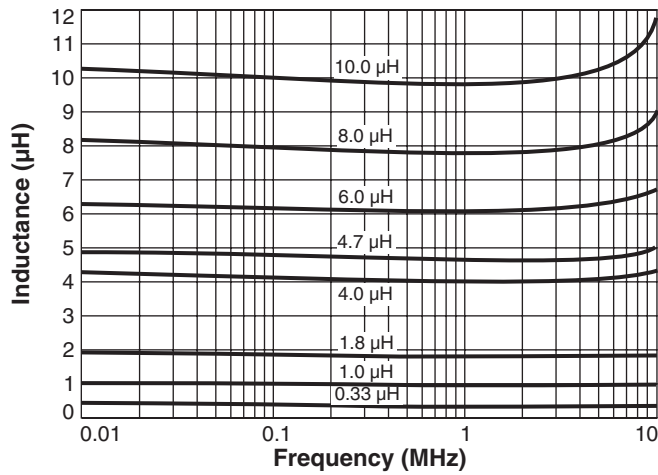


Typical L vs Current

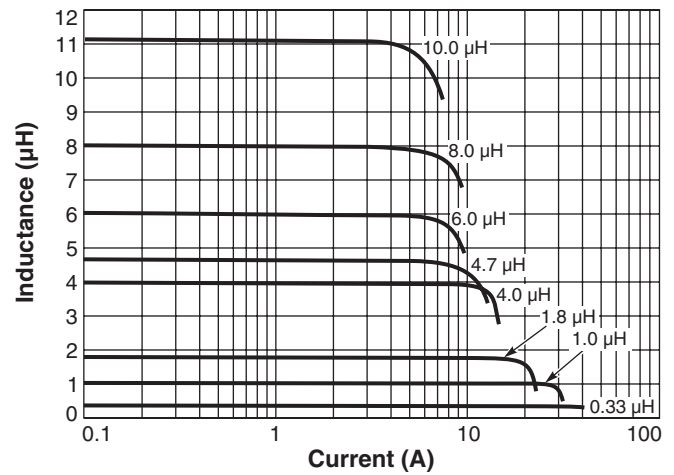

Current Derating

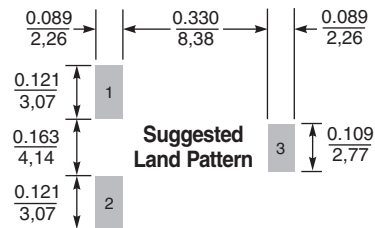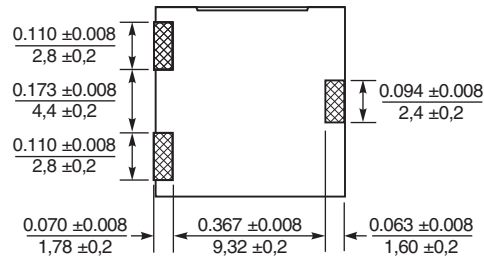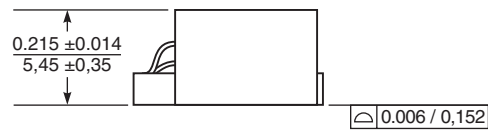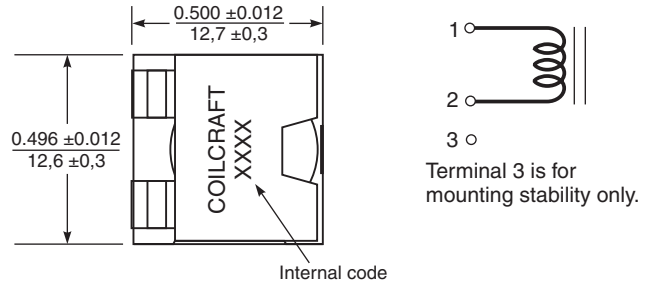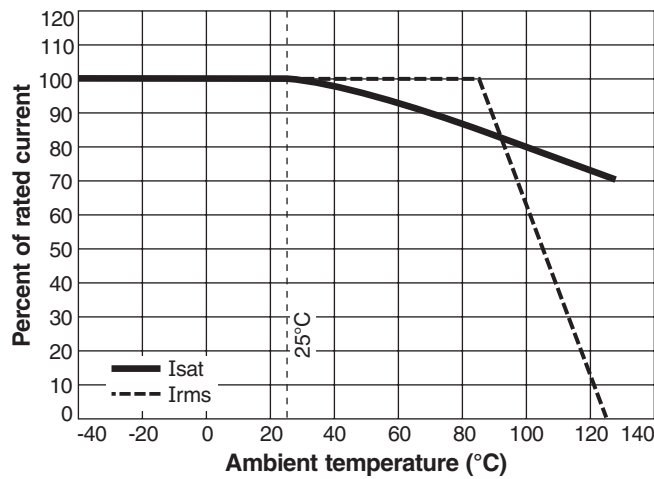

Temperature Rise vs Current

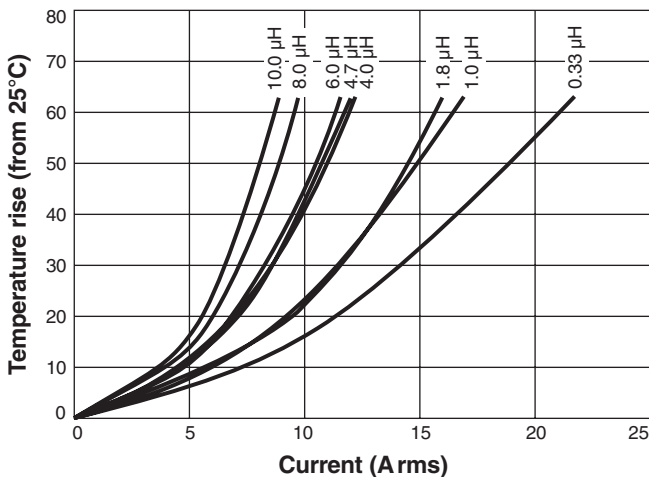

Dimensions are in inches / mm



1102 Silver Lake Road
Cary, IL 60013
Phone 800-981-0363