


## Schottky Barrier Diodes

### KB491D(RB491D)

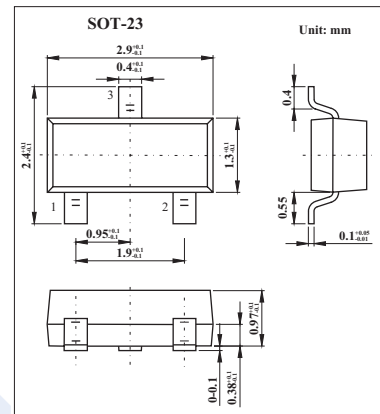

#### ■ Features

- Small surface mounting type.
- Low reverse current and low forward voltage.
- High reliability.

#### ■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Peak reverse voltage	$V_{RM}$	25	V
DC reverse voltage	$V_R$	20	V
Mean rectifying current	$I_F$	1	A
Peak forward surge current	$I_{FSM}$	3	A
Junction temperature	$T_j$	125	$^\circ\text{C}$
Storage temperature	$T_{stg}$	-40 to +125	$^\circ\text{C}$

#### ■ Electrical Characteristics $T_a = 25^\circ\text{C}$

Parameter	Symbol	Testconditons	Min	Typ	Max	Unit
Forward voltage	$V_F$	$I_F=1\text{A}$			0.45	V
Reverse current	$I_R$	$V_R=20\text{V}$			200	$\mu\text{A}$

#### ■ Marking

Marking	D2E
---------	-----

KB491D(RB491D)

■ Typical Characteristics

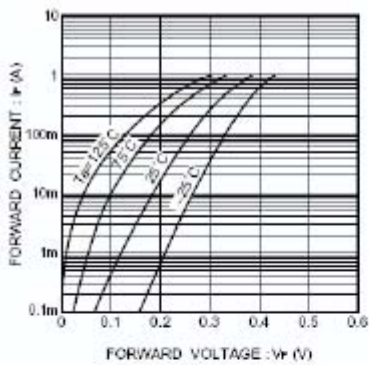


Fig.1 Forward characteristics

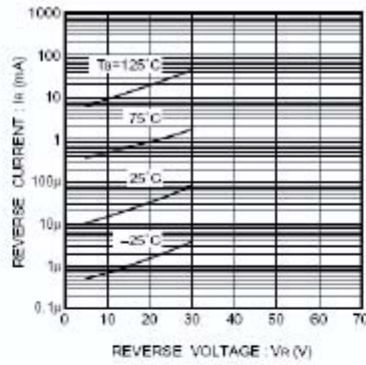


Fig.2 Reverse characteristics

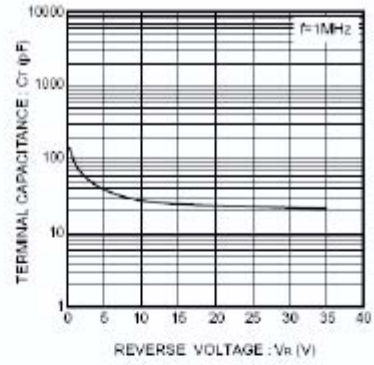


Fig.3 Capacitance between terminals characteristics

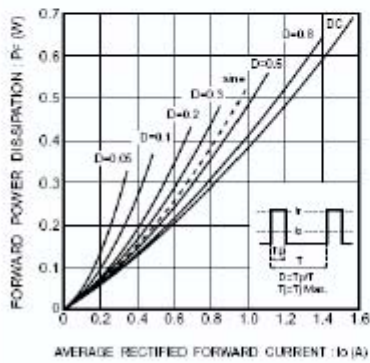


Fig.4 Forward power dissipation characteristics

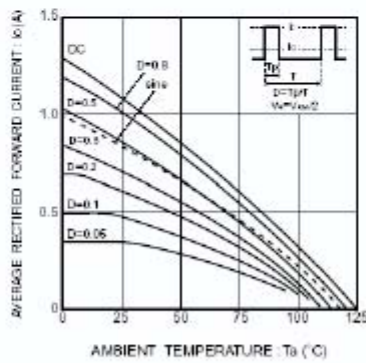


Fig.5 Derating curve ( $I_o - T_a$ )