


NOTES:
 1. FOR USE WITH RG-218/U CABLE.
 2. FOR CABLING PROCEDURE SEE CP 101B.

UNLESS OTHERWISE SPECIFIED:
 1. TOLERANCES: FRACTIONS & 2 PLACE DECIMALS & .010
 2. REMOVE ALL BURRS, BREAK SHARP EDGES, .005 MAX.
 3. PLACE DECIMALS & .004 ANGLES & °'30"
 4. SURFACE ROUGHNESS 6.3 MICRONS MAX.
 5. ALL DIMENSIONS PRIOR TO PLATING.
 T. I. R. CONCENTRICITY OF ANY 2 DIAMETERS MAY NOT EXCEED HALF THE SUM OF THEIR TOLERANCES.

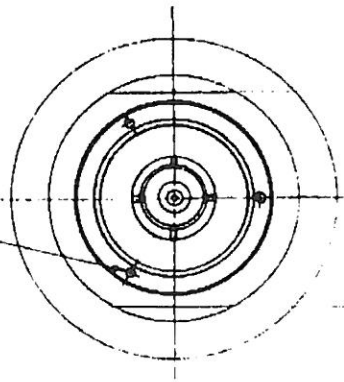

DATE CODE XXXX
 KLN-59-295

5/0 - 24 UNEF - 2 B THREAD

(SHEET 1 OF 2)
 M39012/01-0104

ISSUE	REVISIONS
0	EC 17930 NM 6 JAN 77
1	CN 23169 E JEP 15 APR 82
2	CN 29944 D AMD 20 JUN 88
3	CN 32243 A LNM 1 JUN 90

SCALE: 2:1	
KLN-59-295	
USED ON:	
REV:	
FINISH:	
SPEC:	KEE 10004
MATL:	
PREC:	
N PLUG	
DRAWN BY:	DATE 6 JAN 78
APPR:	DATE 11/1/78
KINGS ELECTRONICS 40 MARSHALL ROAD TUCKAHOE, N. Y. 10787	
M39012/01-0104	

S-D

(SHEET 1 OF 2)

S-D

ITEM	REQ'D	DESCRIPTION	PART NO.
1	1	CLAMP NUT	167A-2-MC7
2	1	BODY	
3	1	WASHER	167A-4-MC7
4	1	GASKET	708-5-M99
5	1	BRAID CLAMP	708-4-MC7
6	1	WASHER	1-1756-1MC7
7	1	INSULATOR	1-1753-1M99
8	1	INSULATOR	1-5520-1M99
9	1	N CONTACT M	1-1755-1M9D
10	1	C-RING	
11	1	GASKET	
12	1	OUTER CONTACT	
13	1	COUPLING NUT	
14	1	CABLING INSTRUCTIONS	3-83-2M88

REVISIONS

ISSUE	CHANGES
1	CN 23169 E JEP 13 APR 82
2	CN 29944 D AMD 20 JUN 88
3	CN 32243 A LNM 1 JUN 90

USED ON: KN-59-295

REF:
FINISH
SPEC: KER 10004
MATL
SPEC:

PARTS LIST

DRAWN M M DATE 6 JAN 78
APPR. DATE 1-16-78

KINGS ELECTRONICS
40 MARBLEDALE ROAD
TUCKAHOE, N. Y. 10707

S-D M39012/01-0104
(SHEET 2 OF 2)

- UNLESS OTHERWISE SPECIFIED:
1. TOLERANCES: FRACTIONS & 2 PLACE DECIMALS & .010
 2. REMOVE ALL BURRS. BREAK SHARP EDGES .005 MAX.
 3. PLACE DECIMALS & .004
 3. NO FILLETS PERMITTED.
 4. SURFACE ROUGHNESS 63 MICROINCHES RMS MAX.
 5. ALL DIMENSIONS PRIOR TO PLATING.
 - T. I. R. CONCENTRICITY OF ANY 2 DIAMETERS MAY NOT EXCEED HALF THE SUM OF THEIR TOLERANCES.