



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect

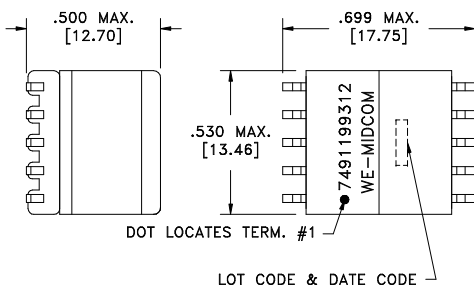


TERM. NO.'s FOR REF. ONLY




DOT LOCATES TERM. #1

LOT CODE & DATE CODE



Customer to tie terminals 7+8 and 9+10 internally on PC Board.

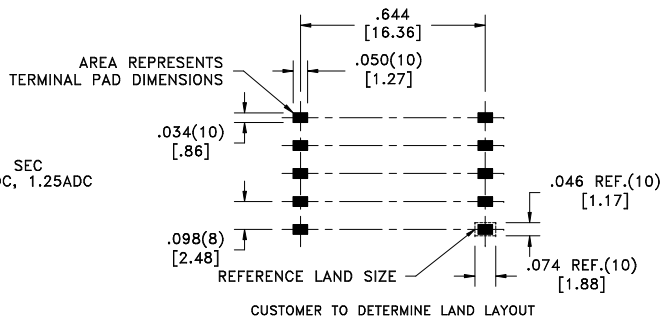

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	2-1 @20°C	0.110 ohms max.
D.C. RESISTANCE	7-9 @20°C	0.155 ohms max.
D.C. RESISTANCE	8-10 @20°C	0.155 ohms max.
INDUCTANCE	2-1 200kHz, 200mVAC, Ls	40uH ±10%
INDUCTANCE	2-1 200kHz, 200mVAC, 2ADC, Ls	36uH min.
LEAKAGE INDUCTANCE	2-1 tie(7+8+9+10), 200kHz, 100mVAC, Ls	566nH max.
DIELECTRIC	2-7 tie(7+8), 1875VAC, 1 second	1500VAC, 1 minute
URNS RATIO	(2-1):(7-9), tie(7+8, 9+10)	1:1, ±1%

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C (includes Ambient plus Temperature Rise).

DETAILS SUBJECT TO CHANGE

REV.	DATE	Packaging Specifications Method: Tape & Reel PKG-0499 www.midcom-inc.com		Tolerances unless otherwise specified: Angles: ±1°      Decimals: ±.005 [.13] Fractions: ±1/64      Footprint: ±.005 [.13]	DRAWING TITLE <b>TRANSFORMER</b>	PART NO. <b>7491199312</b>
6A	11/08	SEE REVISION SHEET FOR REVISION LEVEL	CONVENTION PLACEMENT	This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 7491199312	SPECIFICATION SHEET 1 OF 1