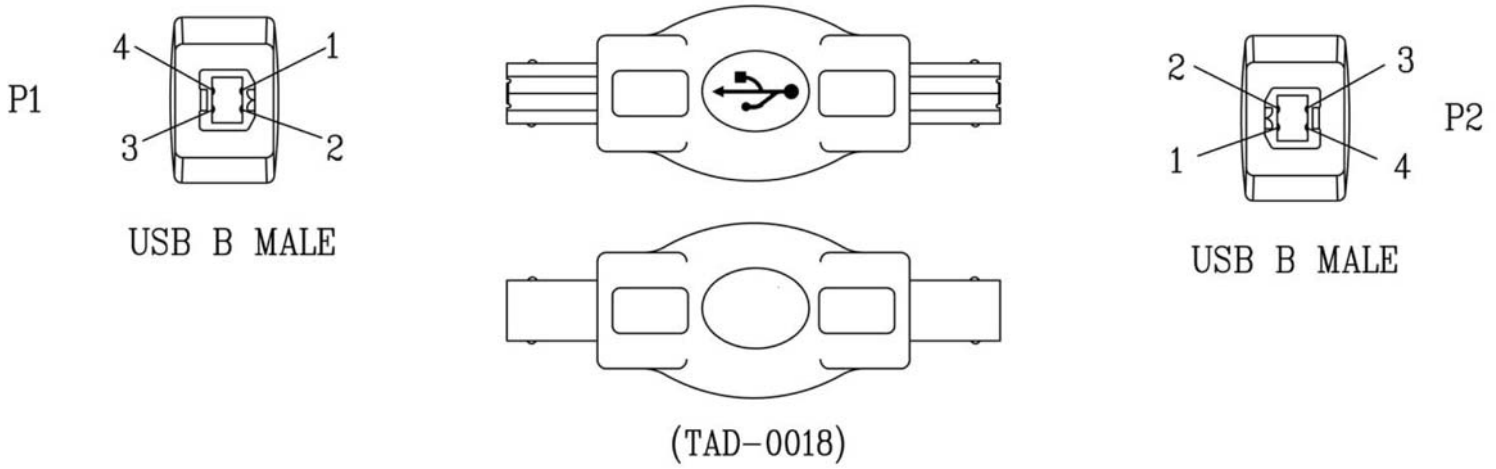

PIN OUT

P1		P2
1	———	1
2	———	2
3	———	3
4	———	4
SHELL	———	SHELL

Material:

- Hook up wire: Non-UL 26AWG
- Connector: P1 & P2: USB B Male Gold Flash Contact
  - Nickel Plated Shell
  - Plastic: White
- Hood: Molded Type PVC 45P Color: Beige(NK-A03)

Electrical:

- 100% Open, short & miswire test
- Contact Resistance: 3Ω Max.
- Insulation Resistance: 5Ω Min.

RoHS Complaint

Scale	1:1
TOLERANCE	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	±3°

Modification	Date	Name

		Name
Drawn	10.19.11	Chappell
Approved		

ASSMANN WSW components

Item No. **A-USB-6-R**

Title USB Adapter, B Male to B Male

Drawing No. **rev00**

Replace | Sheet