


Features

- 16.8 dB Gain at 2 GHz
- 22 dBm P1dB at 2 GHz
- 31 dBm Output IP3 at 2 GHz
- 1.8 dB NF at 2 GHz
- MTTF > 100 Years
- Single Supply

Description

The ASW234, a power amplifier MMIC, has a high linearity, high gain, and high efficiency over a wide range of frequency, being suitable for use in both receiver and transmitter of telecommunication systems up to 6 GHz. The amplifier is available in an SOT-363 package and passes through the stringent DC, RF, and reliability tests.



Package Style: SOT-363

Typical Performance

Parameters	Units	Typical				
		900	2000	2700	3500	5500
Frequency	MHz	900	2000	2700	3500	5500
Gain	dB	18.7	16.8	15.5	13.5	10
S11	dB	-10	-11	-15	-15	-12
S22	dB	-18	-18	-15	-12	-10
Output IP3 ¹⁾	dBm	29.5	31	31.5	31	28
Noise Figure	dB	1.9	1.8	1.9	2.2	3.3
Output P1dB	dBm	22	22	20.5	18.5	14.5
Current	mA	55	55	55	55	55
Device Voltage	V	5	5	5	5	5

1) OIP3 is measured with two tones at an output power of +5 dBm/tone separated by 1 MHz.

Application Circuit

- 500 ~ 3500 MHz
- 500 ~ 3500 MHz (4.7 V)
- 500 ~ 3500 MHz (3 V)
- IF
- DVB-T (V/U band)
- 5000 ~ 6000 MHz

Product Specifications

Parameters	Units	Min	Typ	Max
Testing Frequency	MHz		2000	
Gain	dB		16.8	
S11	dB		-11	
S22	dB		-18	
Output IP3	dBm		31	
Noise Figure	dB		1.8	
Output P1dB	dBm		22	
Current	mA		55	
Device Voltage	V		5	

Absolute Maximum Ratings


Parameters	Rating
Operating Case Temperature	-40 to +85°C
Storage Temperature	-40 to +150°C
Device Voltage	+5 V
Operating Junction Temperature	+150°C
Input RF Power (Continuous)	22 dBm

* Please find the max. input power data from http://www.asb.co.kr/pdf/Maximum_Input_Power_Analysis.pdf

Pin Configuration

Pin No.	Function
1	RF OUT / Bias
2,3,5,6	GND
4	RF IN


Outline Drawing

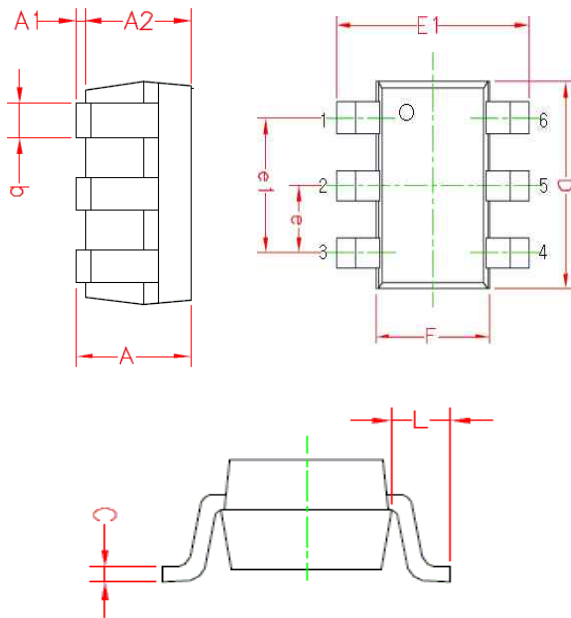

Symbols	Dimensions (In mm)		
	MIN	NOM	MAX
A	0.90	1.00	1.10
A1	0.025	0.062	0.10
A2	0.875	0.937	1.00
b	0.20	0.30	0.40
C	0.10	0.125	0.15
D	1.90	2.00	2.10
F	1.15	1.25	1.35
E1	2.00	2.10	2.20
e	--	0.65BSC	--
e1	--	1.30BSC	--
L	--	0.425REF	--

Pin NO.	Function	Pin NO.	Function.
1	RF OUT / Bias	4	RF IN
2	GND	5	GND
3	GND	6	GND

Mounting Recommendation (in mm)

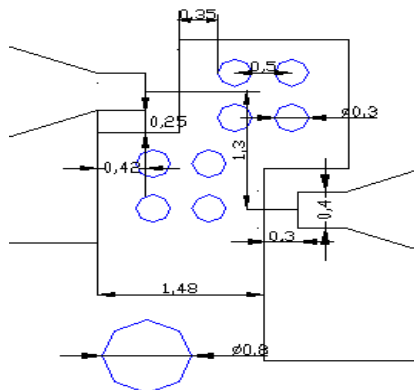

- Note:**
1. The number and size of ground via holes in a circuit board is critical for thermal and RF grounding considerations.
 2. We recommend that the ground via holes be placed on the bottom of lead pin 2 for better RF and thermal performance, as shown in the drawing at the left side.

ESD Classification & Moisture Sensitivity Level

ESD Classification

HBM	Class 1A
	Voltage Level: 400 V
MM	Class A
	Voltage Level: 50 V

CAUTION: ESD-sensitive device!

Moisture Sensitivity Level (MSL)

Level 3 at 260°C reflow

APPLICATION CIRCUIT


500 ~ 3500 MHz

+5 V


Frequency (MHz)	900	2000	2700	3500
Magnitude S21 (dB)	18.7	16.8	15.5	13.5
Magnitude S11 (dB)	-10	-11	-15	-15
Magnitude S22 (dB)	-18	-18	-15	-12
Output P1dB (dBm)	22	22	20.5	18.5
Output IP3 ¹⁾ (dBm)	29.5	31	31.5	31
Noise Figure (dB)	1.9	1.8	1.9	2.2
Device Voltage (V)	5	5	5	5
Current (mA)	55	55	55	55

1) OIP3 is measured with two tones at an output power of +5 dBm/tone separated by 1MHz.





Schematic

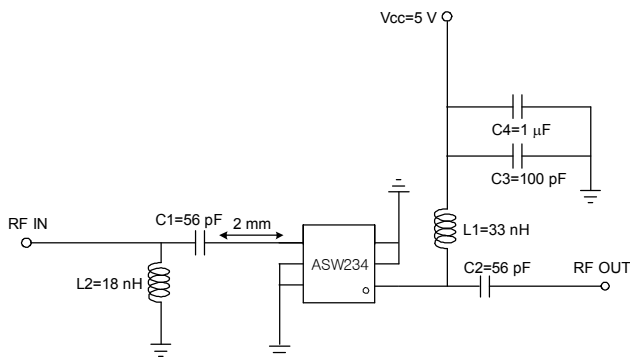

Board Layout (FR4, 40x40 mm², 0.8T)

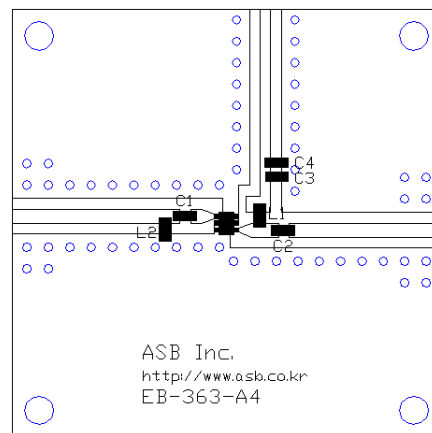

S-parameters & K-factor

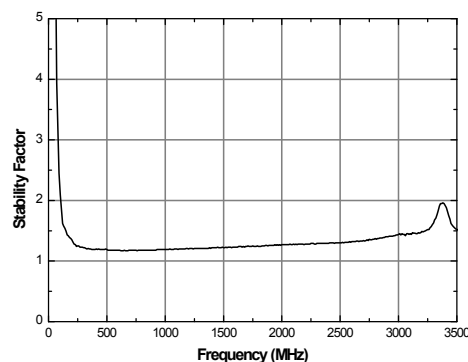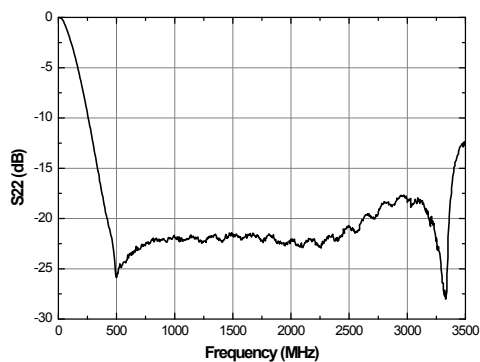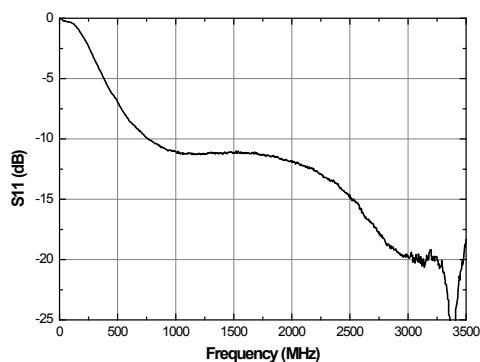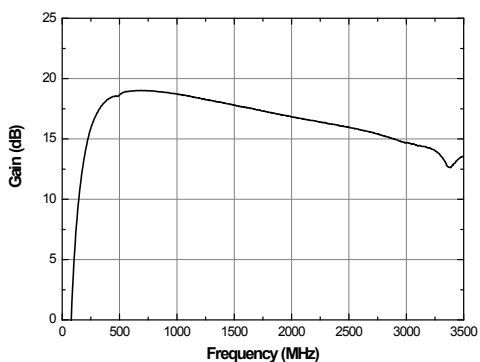

APPLICATION CIRCUIT


500 ~ 3500 MHz

+4.7 V


Frequency (MHz)	900	2000	2700	3500
Magnitude S21 (dB)	17.8	16.2	15	13.5
Magnitude S11 (dB)	-9	-12	-18	-12
Magnitude S22 (dB)	-15	-18	-14	-12
Output P1dB (dBm)	21	21	19.5	19.5
Output IP3 ¹⁾ (dBm)	26	29	30	31
Noise Figure (dB)	1.8	1.8	1.9	2.2
Device Voltage (V)	4.7	4.7	4.7	4.7
Current (mA)	35	35	35	35

1) OIP3 is measured with two tones at an output power of +5 dBm/tone separated by 1MHz.





Schematic

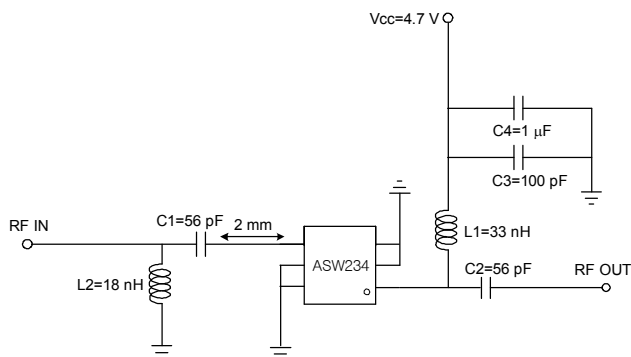

Board Layout (FR4, 40x40 mm², 0.8T)

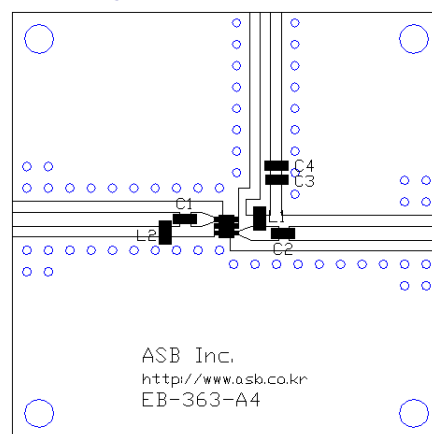

S-parameters & K-factor

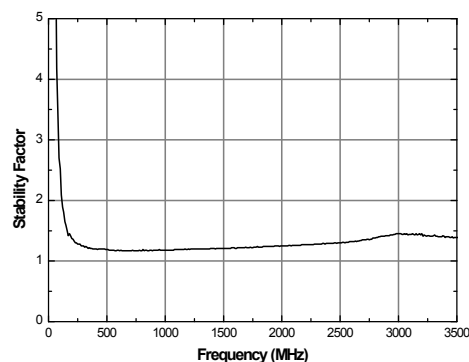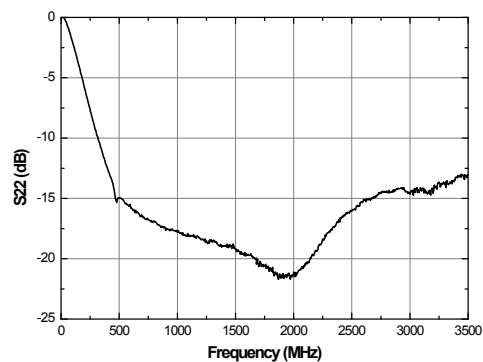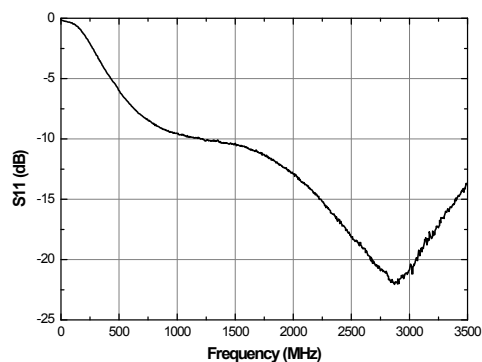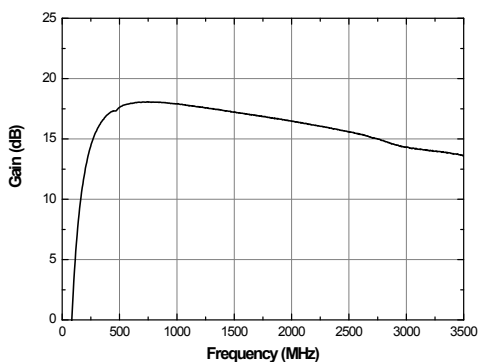

APPLICATION CIRCUIT


500 ~ 3500 MHz

+3 V


Frequency (MHz)	900	2000	2700	3500
Magnitude S21 (dB)	18.8	16.5	14.8	12.5
Magnitude S11 (dB)	-11	-14	-18	-13
Magnitude S22 (dB)	-18	-16	-14	-18
Output P1dB (dBm)	16.5	17	15.5	16.5
Output IP3 ¹⁾ (dBm)	31	32	34	31
Noise Figure (dB)	2.2	2.2	2.4	2.6
Device Voltage (V)	3	3	3	3
Current (mA)	53	53	53	53

1) OIP3 is measured with two tones at an output power of +5 dBm/tone separated by 1MHz.





Schematic

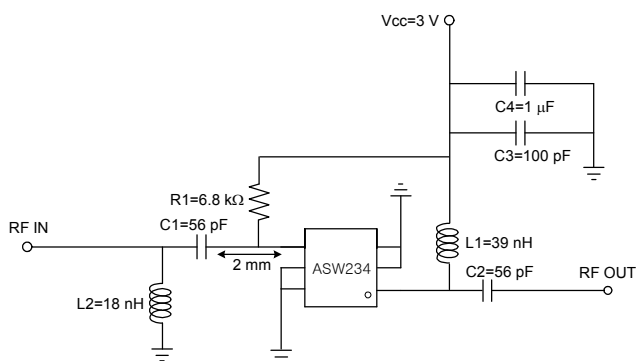

Board Layout (FR4, 40x40 mm², 0.8T)

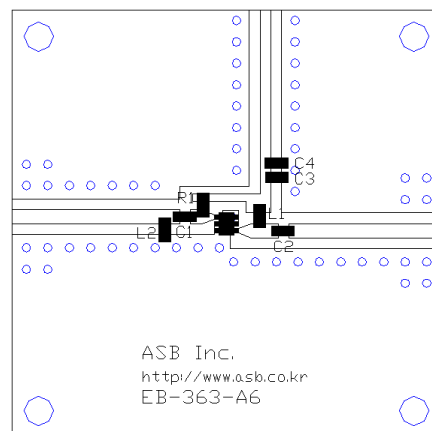

S-parameters & K-factor

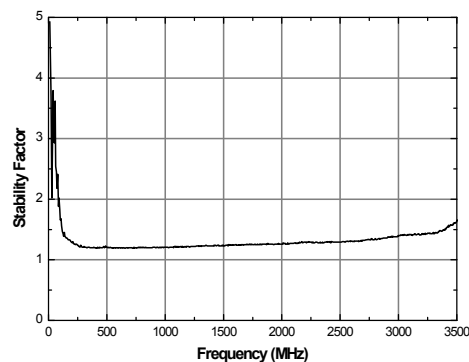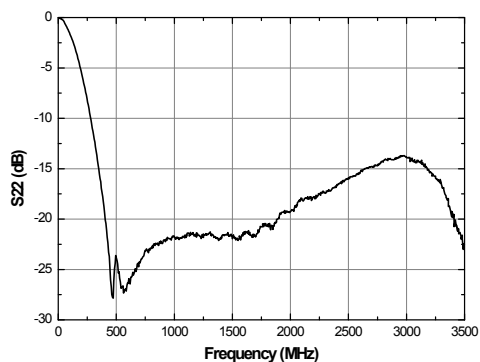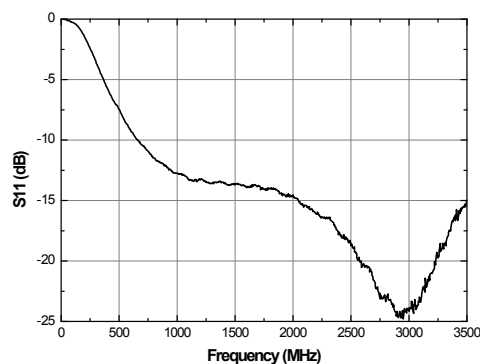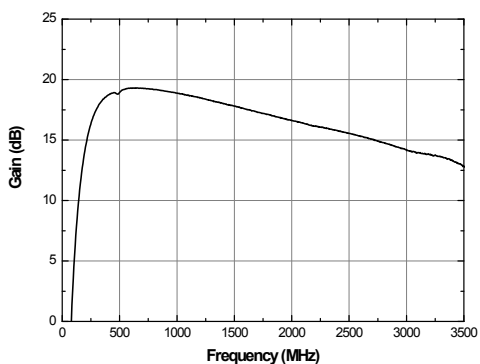

APPLICATION CIRCUIT

IF


50 ~ 450 MHz

+5 V


Frequency (MHz)	70	150	300
Magnitude S21 (dB)	21	20	19.5
Magnitude S11 (dB)	-5	-8	-9
Magnitude S22 (dB)	-13	-16	-18
Output P1dB (dBm)	21.5	21.5	21.5
Output IP3 ¹⁾ (dBm)	27	28	29
Noise Figure (dB)	2.8	2.2	2.1
Device Voltage (V)	5	5	5
Current (mA)	55	55	55

1) OIP3 is measured with two tones at an output power of +5 dBm/tone separated by 1MHz.





Schematic

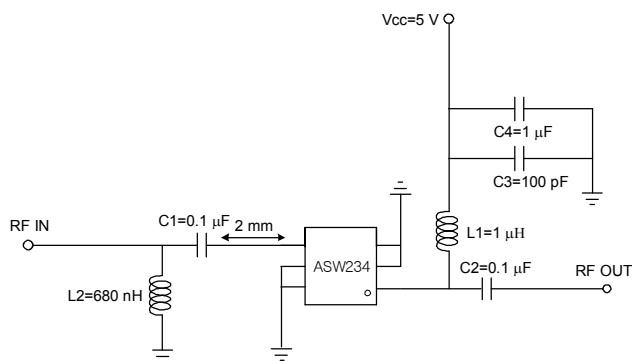

Board Layout (FR4, 40x40 mm², 0.8T)

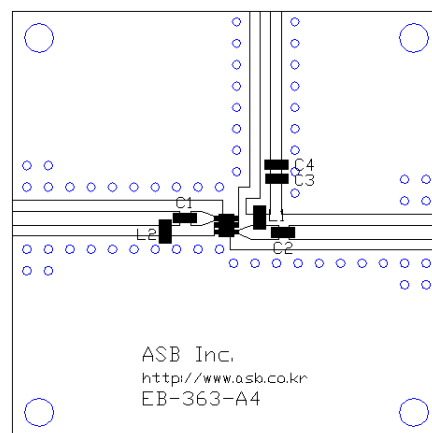

S-parameters & K-factor

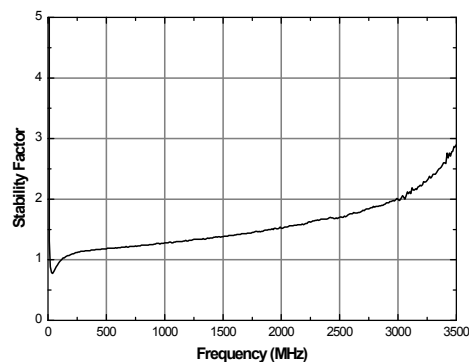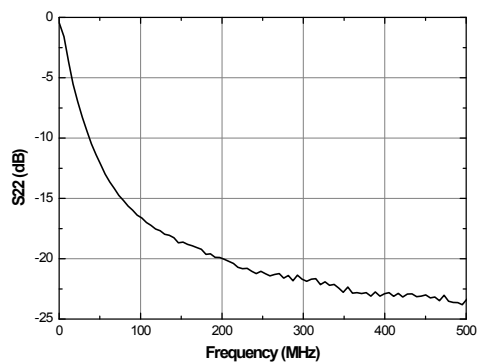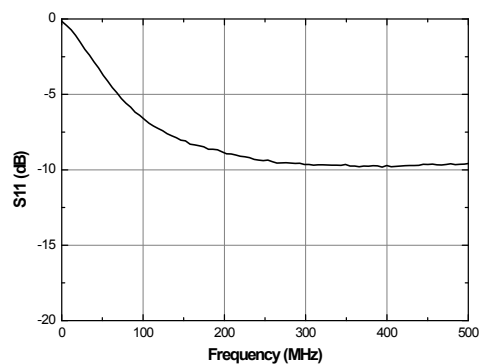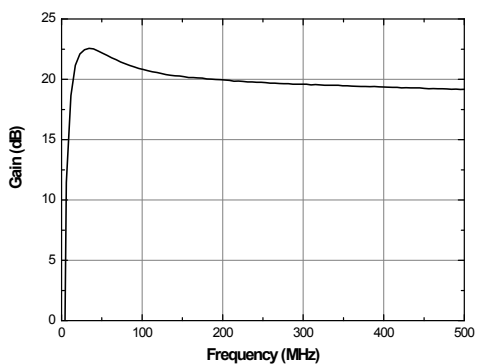

APPLICATION CIRCUIT

DVB-T (V / U band)


170 ~ 860 MHz

+4.5 V


Frequency (MHz)	170	860
Magnitude S21 (dB)	18	16
Magnitude S11 (dB)	-5	-7
Magnitude S22 (dB)	-13	-15
Output P1dB (dBm)	20	20
Output IP3 ¹⁾ (dBm)	23.5	23.5
Noise Figure (dB)	1.7	2.1
Device Voltage (V)	4.5	4.5
Current (mA)	25	25

1) OIP3 is measured with two tones at an output power of +0 dBm/tone separated by 1 MHz.





Schematic

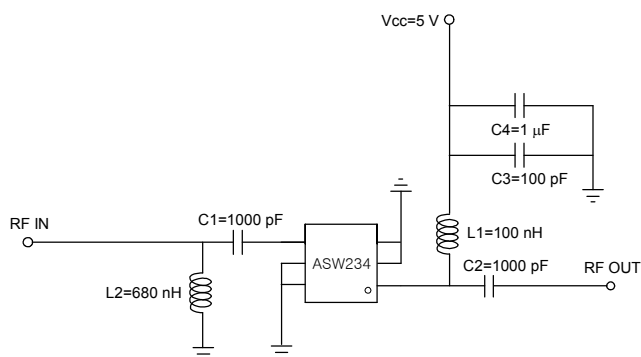

Board Layout (FR4, 40x40 mm², 0.8T)

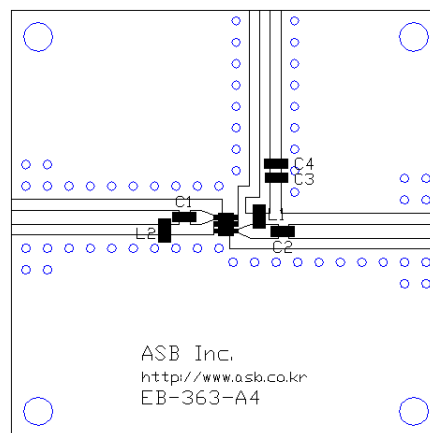

S-parameters & K-factor

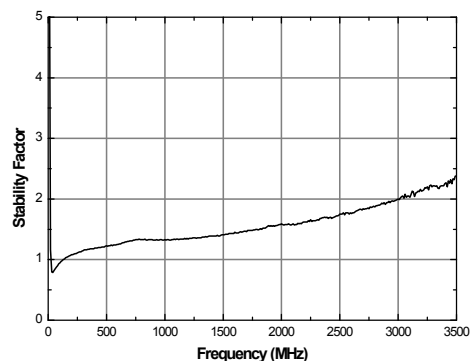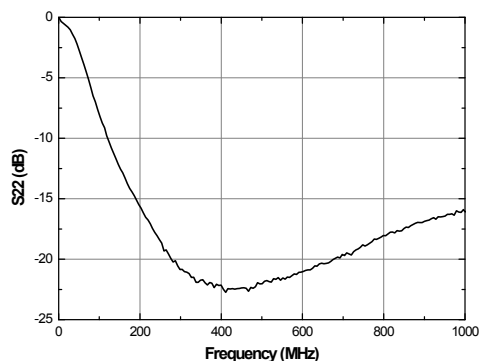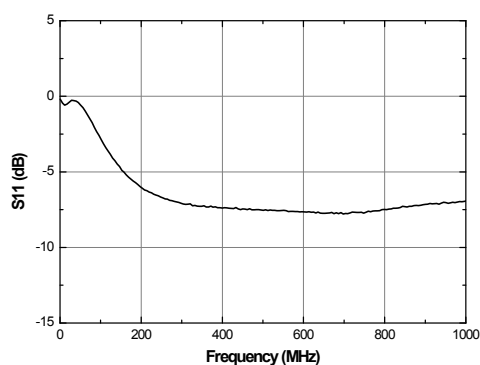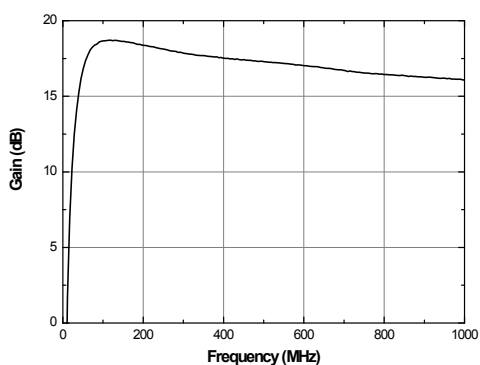

APPLICATION CIRCUIT


5000 ~ 6000 MHz

+5 V


Frequency (MHz)	5000	5500	6000
Magnitude S21 (dB)	10	10	9.7
Magnitude S11 (dB)	-10	-12	-15
Magnitude S22 (dB)	-10	-10	-13
Output P1dB (dBm)	15	14.5	14
Output IP3 ¹⁾ (dBm)	27	28	24.5
Noise Figure (dB)	2.8	3.3	3.9
Device Voltage (V)	5	5	5
Current (mA)	55	55	55

1) OIP3 is measured with two tones at an output power of +0 dBm/tone separated by 1MHz.

Schematic

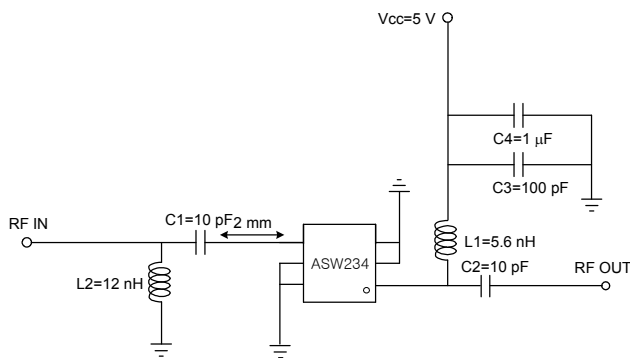

Board Layout (FR4, 40x40 mm², 0.8T)

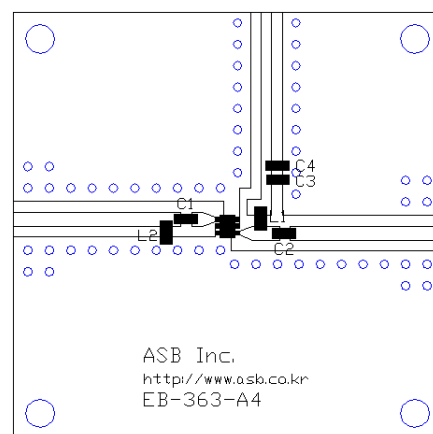

S-parameters & K-factor

