

SHINDENGEN

General Purpose Rectifiers

Square In-line Package


S50VB60

600V 50A

OUTLINE DIMENSIONS

Case : S50VB

Unit : mm

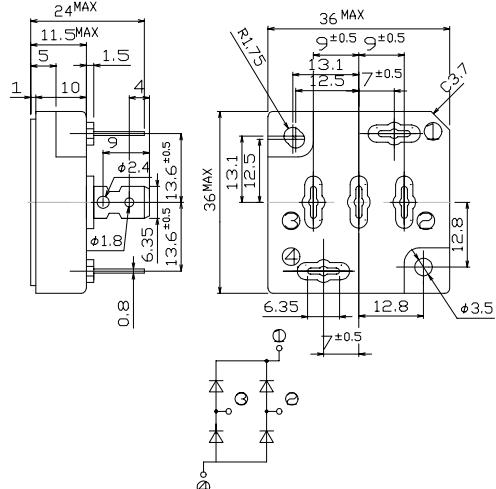

RATINGS


● Absolute Maximum Ratings

Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T _{stg}		-40~150	°C
Operating Junction Temperature	T _j		150	°C
Maximum Reverse Voltage	V _{RM}		600	V
Average Rectified Forward Current	I _O	50Hz sine wave, R-load, With heatsink, T _c =95°C	50	A
Peak Surge Forward Current	I _{FSM}	50Hz sine wave, Non-repetitive 1cycle peak value, T _j =25°C	500	A
Current Squared Time	I ² t	1ms≤t<10ms T _j =25°C	800	A ² s
Dielectric Strength	V _{dis}	Terminals to case, AC 1 minute	2	kV
Mounting Torque	T _{OR}	(Recommended torque : 0.6N·m)	0.8	N·m

● Electrical Characteristics (T_c=25°C)


Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V _F	I _F =25A, Pulse measurement, Rating of per diode	Max.1.05	V
Reverse Current	I _R	V _R =V _{RM} , Pulse measurement, Rating of per diode	Max.10	μA
Thermal Resistance	θ _{jc}	junction to case	Max.0.5	°C/W

S50VBx Forward Voltage


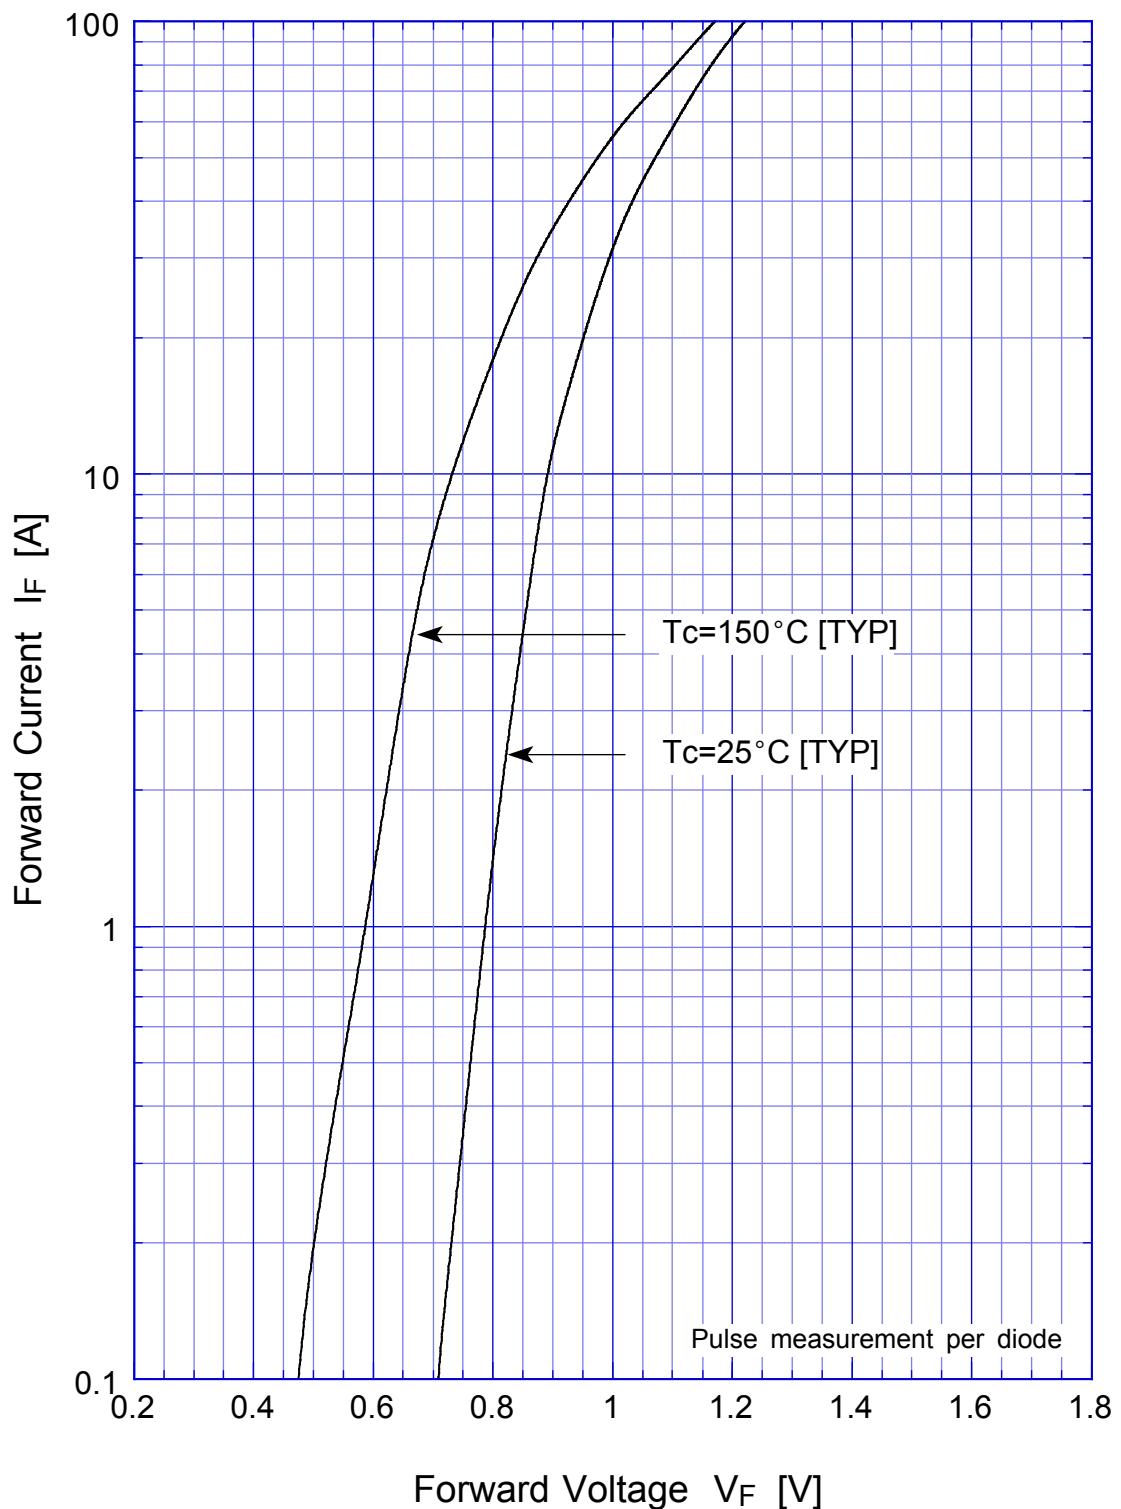


S50VBx

Forward Power Dissipation

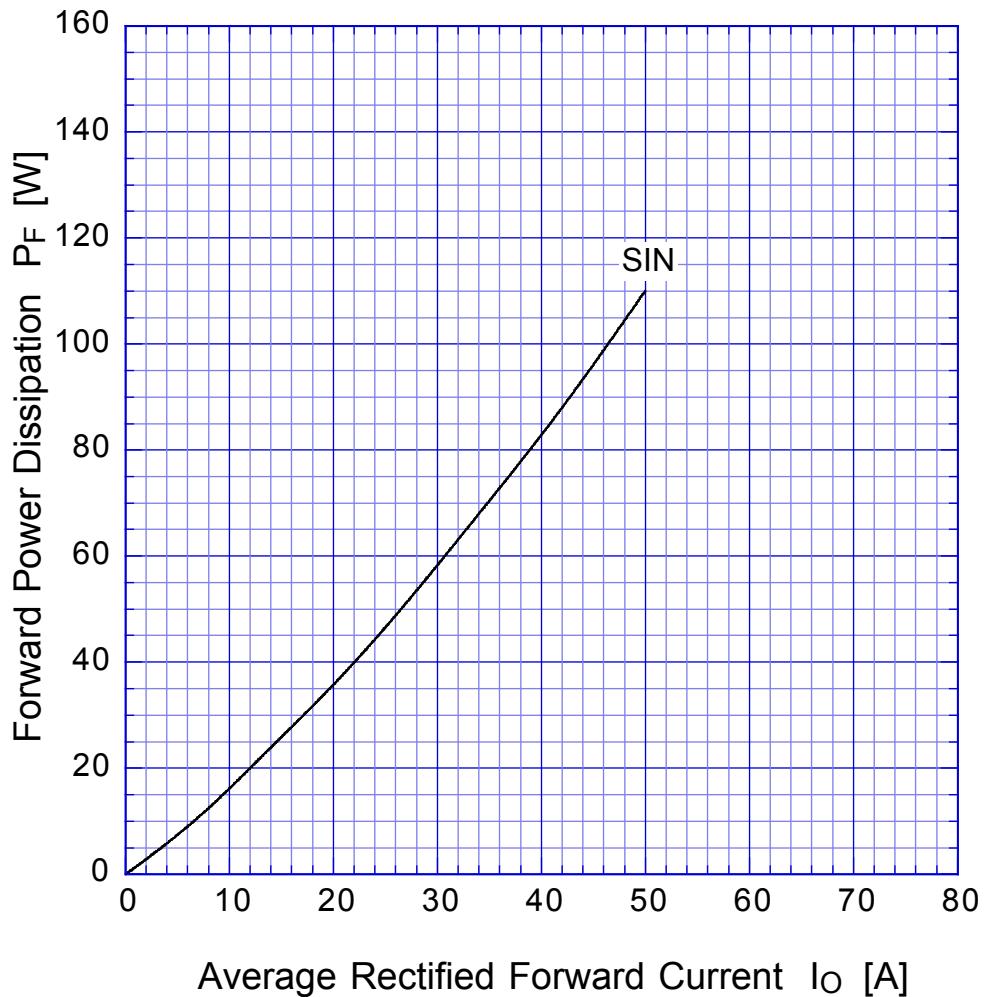

$$T_j = T_{j\max}$$

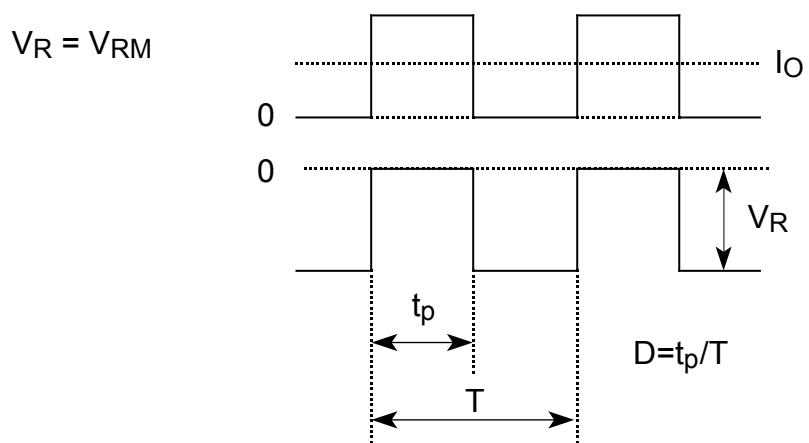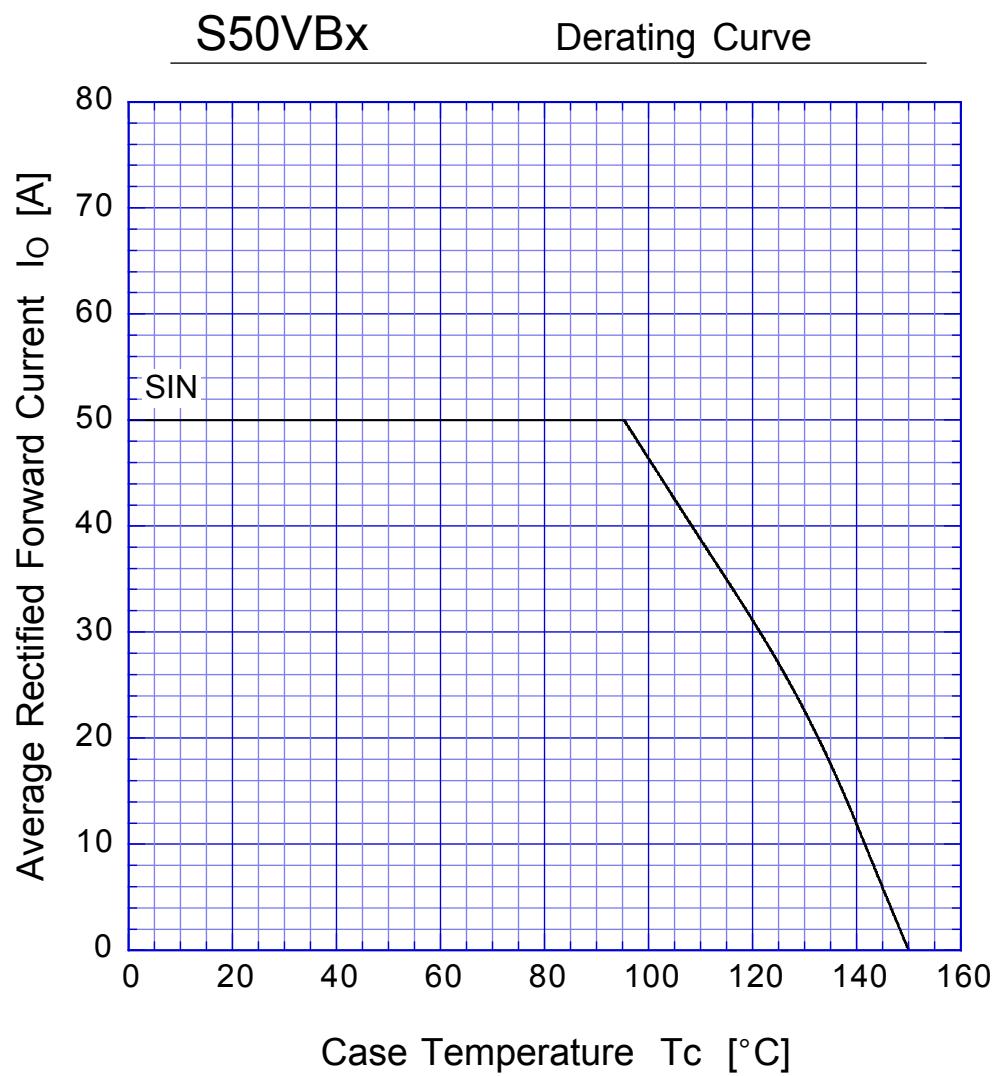

S50VBx

Peak Surge Forward Capability

