


VLL1792 UHF SPDT Switch

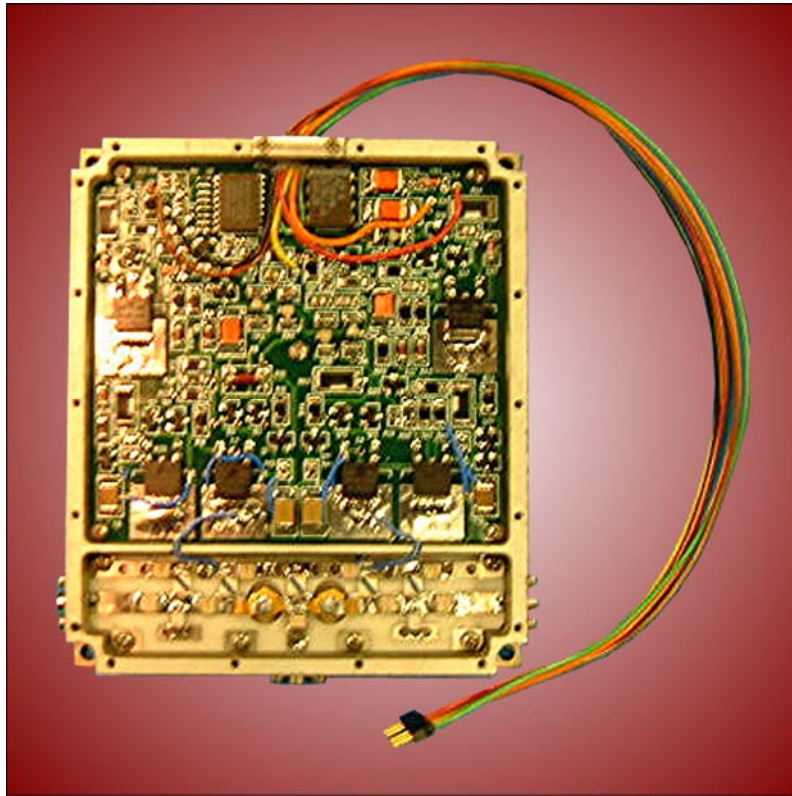

Description:

The VLL1790 is a UHF SPDT switch. The unit is capable of being “hot switched.”

Features:

- **Freq. Range: 350 to 390 MHz**
- **Input Power: 32 W CW max**
- **Load Return Loss: 9.5 dB max**
- **Insertion Loss: 1.0 dB max**
- **Return Loss: 17.7 dB min**
- **Isolation: 40 dB min**
- **Switching Speed: 1 μ S max**
- **Switching Rate: 30 kHz max**
- **DC Blocks included**
- **Control: RS422**
- **Power Supplies:**
 - -50 VDC @ 100 mA max
 - +15 VDC @ 350 mA max
 - + 5VDC @ 25 mA max
- **RF Connectors: GPPO**
- **Operating Temperature: 0 to 60° C**

150 Sohier Road
Beverly, Massachusetts 01915



Phone: 978-922-6000 Fax: 978-922-2736
E-Mail: marketing@bmd.cpii.com
Internet: www.cpii.com/bmd