S-D

DASH NO.	DESCRIPTION	MADE FROM

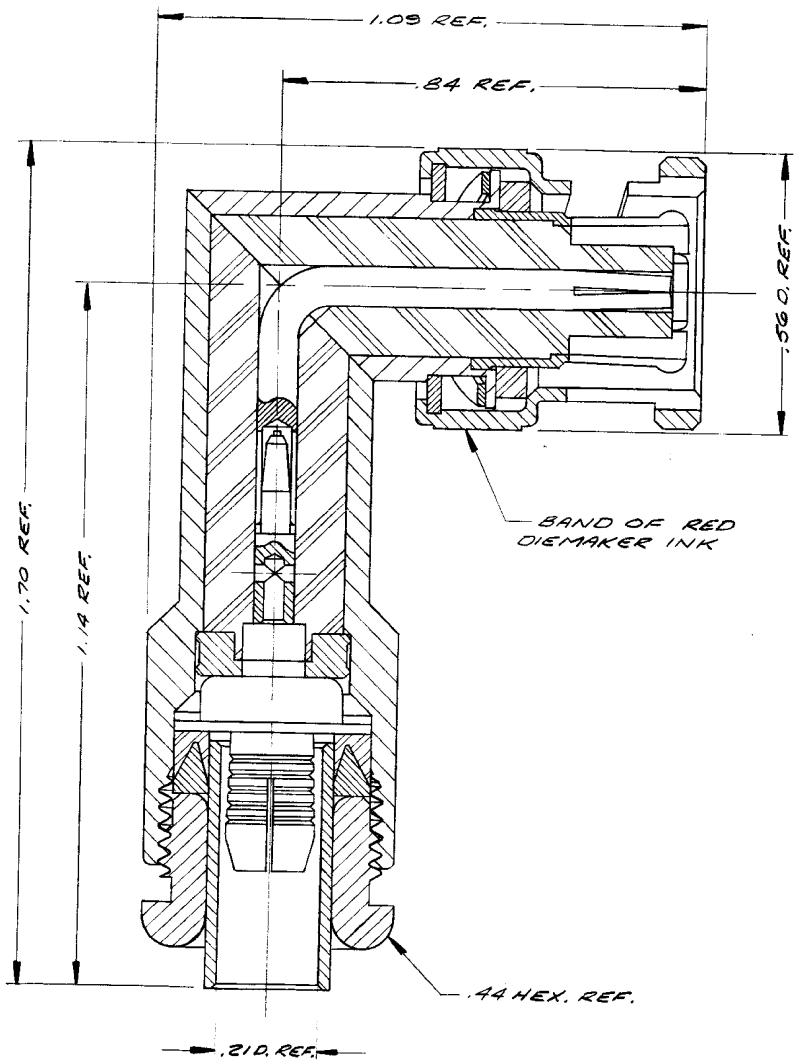

NOTES:
1. FOR USE WITH RG-58, 58A & 58C/U CABLE.
2. FOR CABLE TRIMMING USE KTJ-17 & KTO-77.
3. FOR CRIMPING USE DIE SIZE 01.
4. FOR CABLING INSTRUCTIONS SEE CP-201A.
5. MATERIALS:
   - BRASS, QQ-B-626
   - BERYLLIUM COPPER, QQ-C-530
   - COMM. BRONZE TUBING, ALLOY 220
   - TEFLON, MIL-P-19468
   - SILICONE RUBBER, ZZ-R-765a
6. PLATING:
   - SILVER PLATE, QQ-S-365 .0002 MIN.
   - TR-5, TARNISH RESISTANT FINISH
   - CENTER CONTACTS - HARD GOLD PLATE MIL-G-45204 .0001 MIN.
7. ELECTRICAL CHARACTERISTICS:
   - NOMINAL IMPEDANCE - 50 Ω
   - VOLTAGE RATING - 500 VOLTS RMS
   - FREQUENCY RANGE - DC TO 4 GHz

KC-59-226

REVISIONS

ISSUE	CHANGES

SCALE: 4/1

USED ON:

REF: BELL HELICOPTER 30-091-3 REV. B

FINISH

SPEC.

MATL.

SPEC.

BNC ANGLE PLUG (POLARIZED)

DRAWN MJB	DATE 24 JUN 77
APPR.	DATE 24 JUN 77

KINGS ELECTRONICS
40 MARBLEDALE ROAD
TUCKAHOE, N. Y. 10707

KC-59-226

UNLESS OTHERWISE SPECIFIED:

1. TOLERANCES: FRACTIONS & 2 PLACE DECIMALS ± .010
   3 PLACE DECIMALS ± .004 ANGLES ± 0° 30'
   T. I. R. CONCENTRICITY OF ANY 2 DIAMETERS MAY NOT EXCEED HALF THE SUM OF THEIR TOLERANCES.
2. REMOVE ALL BURRS, BREAK SHARP EDGES .005 MAX.
3. NO FILLETS PERMITTED.
4. SURFACE ROUGHNESS 63 MICROINCHES RMS MAX.
5. ALL DIMENSIONS PRIOR TO PLATING.

ITEM	REQ'D	DESCRIPTION	PART NO.

S-D