



Crystal Bridge to the Future

**NIHON DEMPA KOGYO  
Co., Ltd.**

Sasazuka NA Bldg., 1-50-1,  
Sasazuka, Shibuya-Ku, Tokyo 151-  
8569, Japan

Overseas Sales Section

TEL : 81-3-5453-6771

FAX : 81-3-5453-6821

E-Mail : [salessup@ndk.com](mailto:salessup@ndk.com)

<http://www.ndk.com/>

## OCXO 9325D - VHF LOW NOISE CRYSTAL OSCILLATORS





**RoHS Compliant**  
Directive 2002/95/EC

NDK OCXO 9325D is designed to meet the increasing demand for high performance reference oscillators applicable to microwave low noise frequency synthesis. It has excellent temperature stability performance with low phase noise and minimal harmonic response. Our OCXOs, using SC-cut Crystals, produce secure and stable C-mode oscillation.

<b>Frequency</b>	Standard Frequencies : 100 MHz [ contact us for other frequencies. ]
<b>Tuning Range</b>	$\pm 3 \times 10^{-6}$
<b>Tuning Voltage</b>	0 to 10 V, positive slope
<b>Temperature Stability</b>	-20 ~ 70 °C: $\pm 50 \times 10^{-9}$
<b>Aging/year</b>	$\pm 0.5 \times 10^{-6}$ after 30 days
<b>Warm-up at 25°C 5 minutes after power on</b>	$\pm 50 \times 10^{-9}$ max
<b>Output Power</b>	3 dBm min, 50Ω
<b>Harmonics</b>	-60 dBc typical
<b>Phase noise</b>	100 Hz: -125 dBc/Hz 1 kHz: -150 dBc/Hz >10k Hz: -160 dBc/Hz
<b>Supply Voltage</b>	+12 V DC $\pm 5\%$
<b>Power Consumption at 25°C</b>	1.3W after 90 seconds, 3W during warm up
<b>Dimensions</b>	26 x 26 x 13.67 mm

**Outline Drawing**

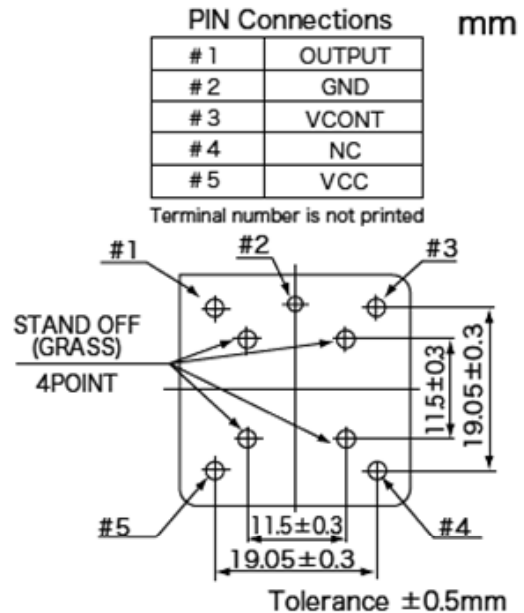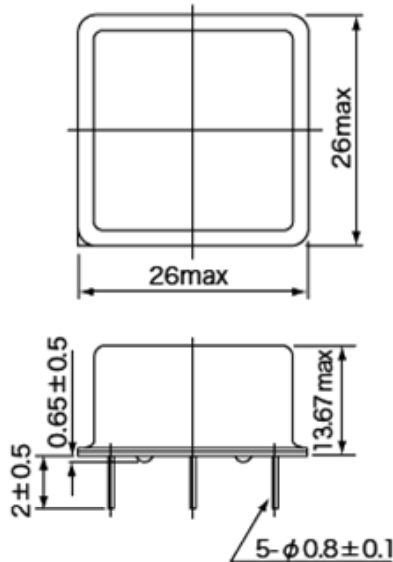

Note) Specifications described in this brochure are subject to change without notice for improvement.

© Copyright 2008 NIHON DEMPA KOGYO CO.,LTD. (NDK). All right reserved. The NDK logo is trademark of NDK. The information in this document is believed to be reliable, however, NDK makes no guarantee or warranty concerning the accuracy of said information and shall not be responsible for any loss or damage of what ever nature resulting from the use of, or reliance upon it.