


LOC		DIST		REVISIONS				
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD	
		R2		REVISED PER ECO-11-004587	11MAR11	RK	HMR	

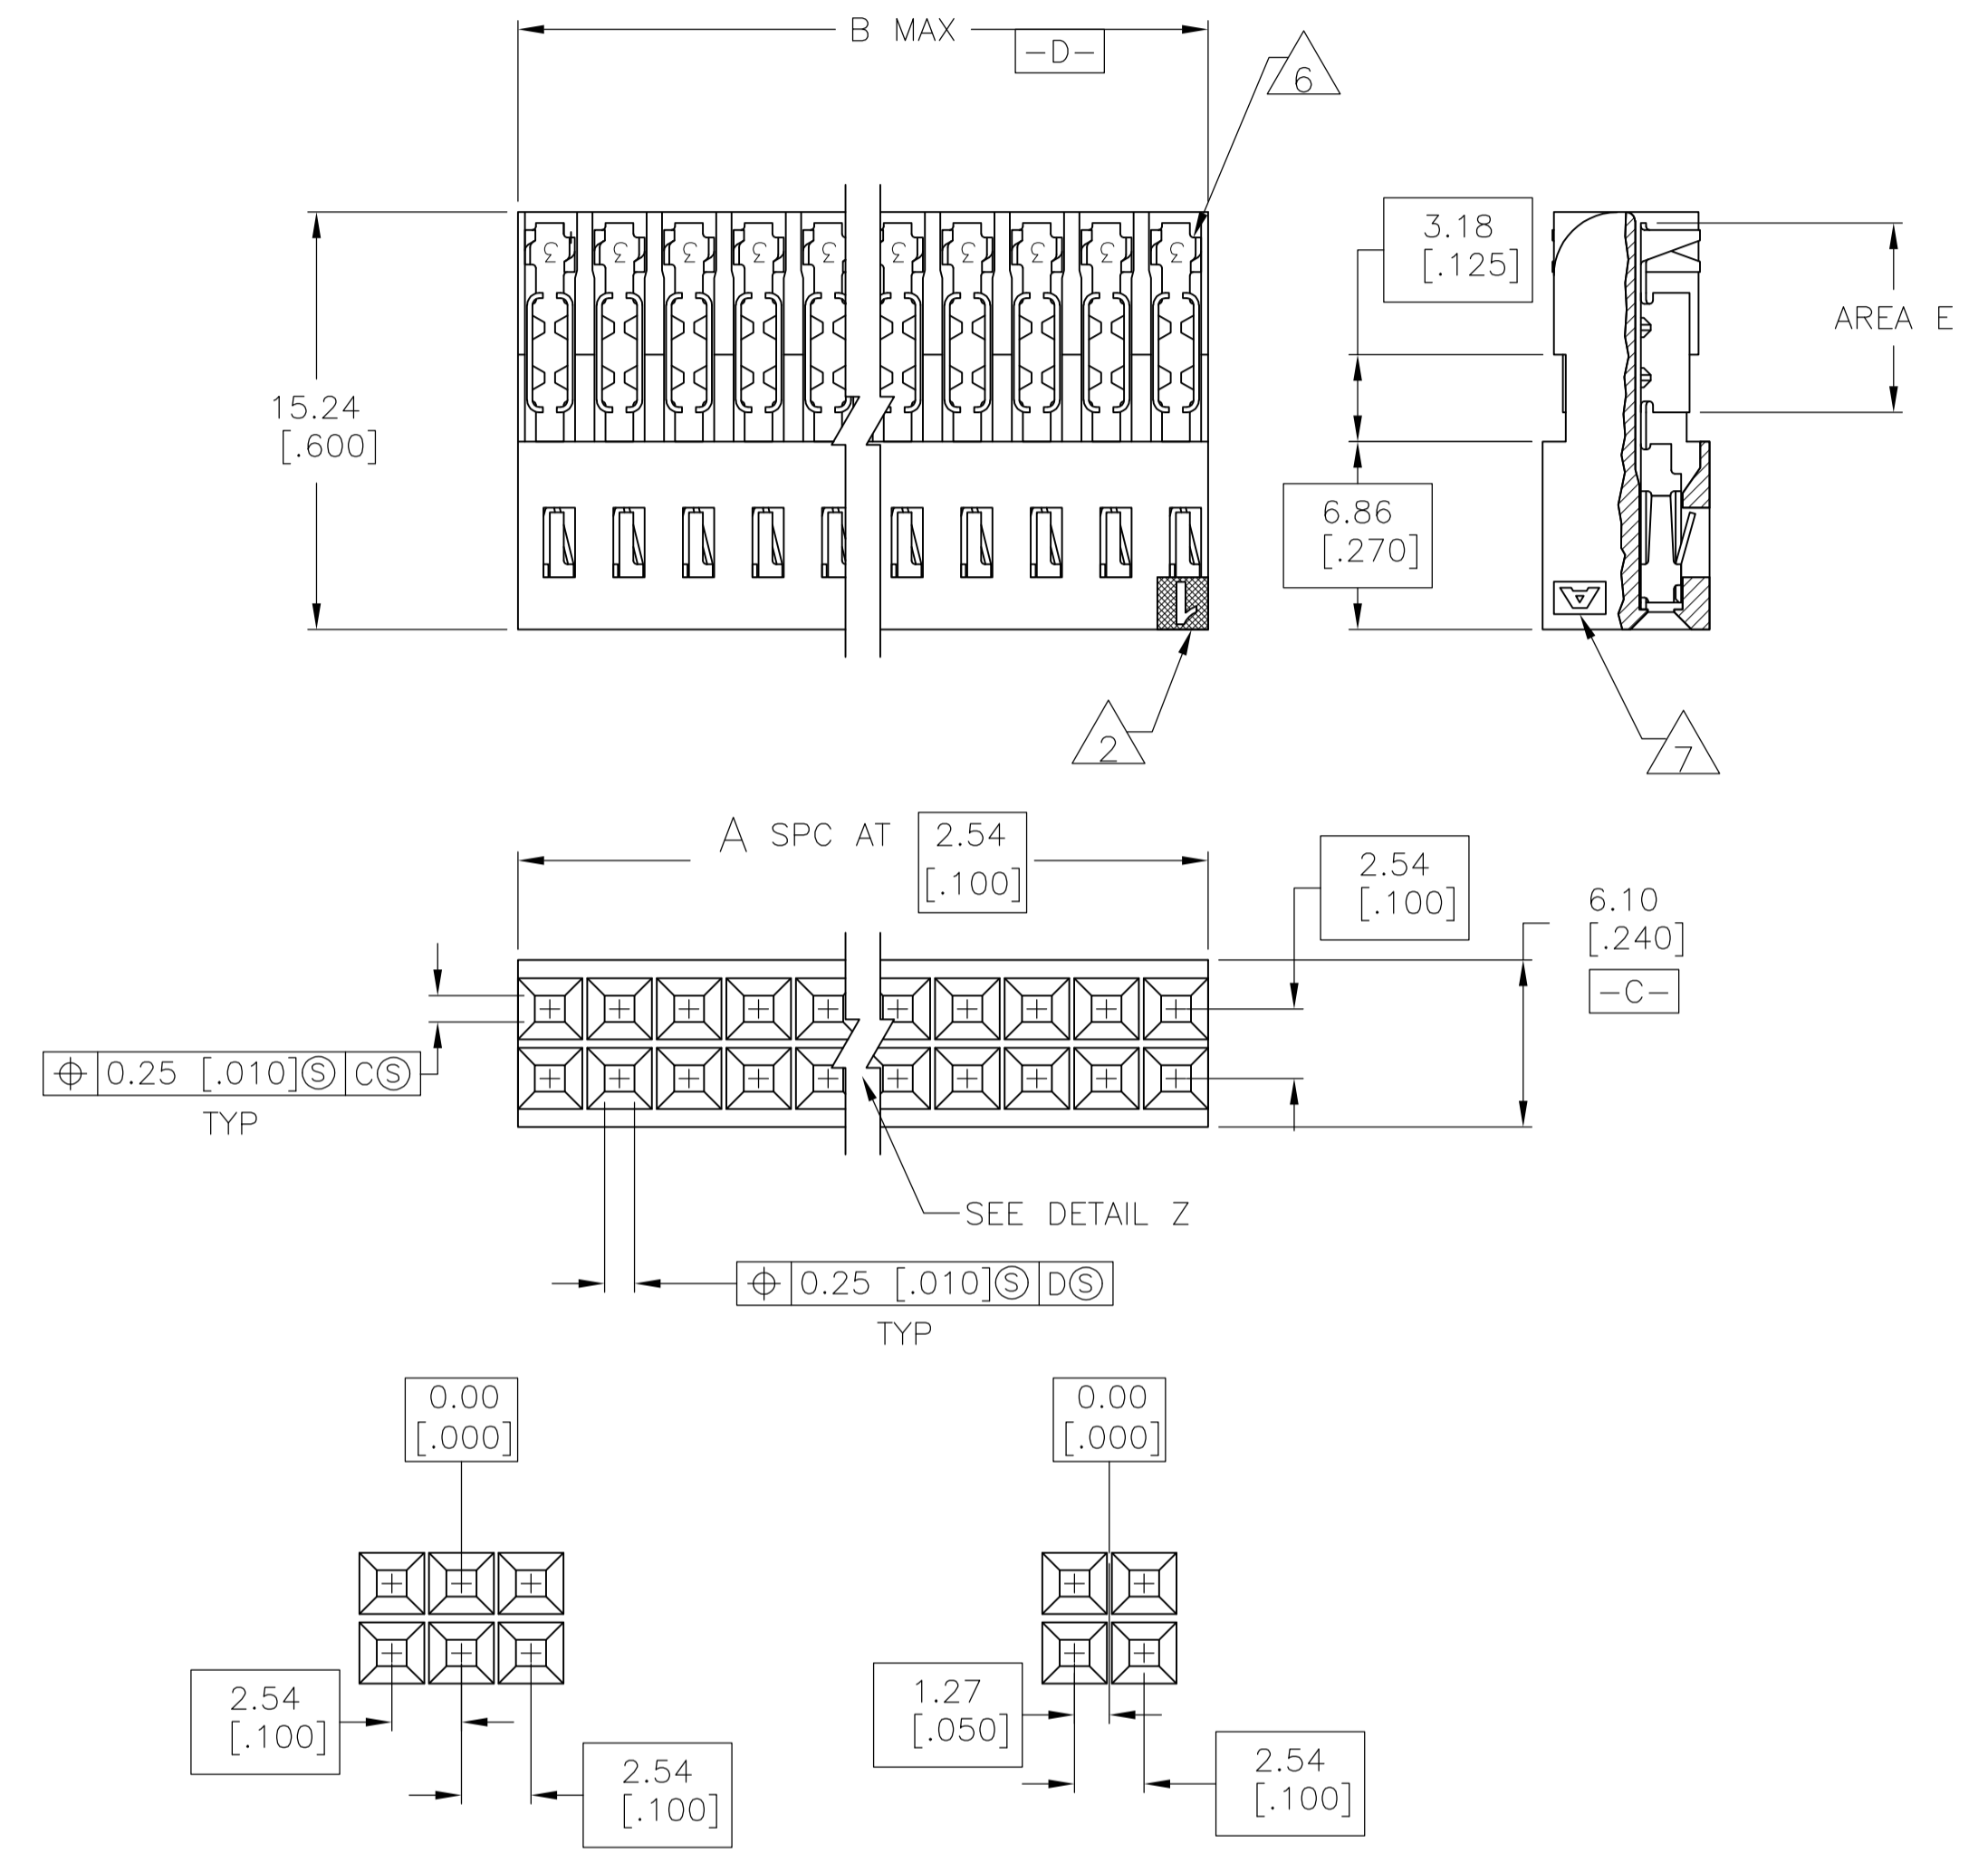

- 1 HOUSING: PBT, UL 94V-0 RATED, COLOR-BLACK
CONTACTS: COPPER ALLOY PER ASTM B103
- 2 MOLDED CIRCUIT #1 IDENTIFIER IN LOCATION SHOWN.
- 3 0.00076[.000030] MIN GOLD IN CONTACT AREA, 0.00127-0.00254 [.000050-.000100]
TIN-LEAD IN AREA E, ALL OVER 0.00127[.000050] MIN NICKEL.
- 4 0.00076[.000030] MIN GOLD IN CONTACT AREA, 0.00127-0.00254 [.000050-.000100]
TIN IN AREA E, ALL OVER 0.00127[.000050] MIN NICKEL.
- 5. USE WITH #20-#22 AWG WIRE SIZE, .050 MAX INSULATION DIA.,
.015 MAX INSULATION WALL THICKNESS.
- 6 CONTACT IDENTIFICATION NUMBER "3" LOCATED IN THIS AREA.
- 7 AMP TRADEMARK (EITHER SIDE).
- 8 OBSOLETE PART NUMBER.
- 9 ROHS 2002/95/EC COMPLIANT.
- 10 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

FINISH	B	A	NO. OF POSN	PART NO.
10	OBSOLETE	4	9	81.28 [3.200] 31 64 8-102448-0
10	OBSOLETE	4	9	76.20 [3.000] 29 60 7-102448-8
		4	9	63.50 [2.500] 24 50 7-102448-3
		4	9	50.80 [2.000] 19 40 6-102448-8
		4	9	43.18 [1.700] 16 34 6-102448-5
10	OBSOLETE	4	9	40.64 [1.600] 15 32 6-102448-4
		4	9	38.10 [1.500] 14 30 6-102448-3
10	OBSOLETE	4	9	35.56 [1.400] 13 28 6-102448-2
		4	9	33.02 [1.300] 12 26 6-102448-1
		4	9	30.48 [1.200] 11 24 6-102448-0
10	OBSOLETE	4	9	27.94 [1.100] 10 22 5-102448-9
		4	9	25.40 [1.000] 9 20 5-102448-8
		4	9	22.86 [.900] 8 18 5-102448-7
10	OBSOLETE	4	9	20.32 [.800] 7 16 5-102448-6
		4	9	17.78 [.700] 6 14 5-102448-5
		4	9	15.24 [.600] 5 12 5-102448-4
		4	9	12.70 [.500] 4 10 5-102448-3
		4	9	10.16 [.400] 3 8 5-102448-2
10	OBSOLETE	4	9	7.62 [.300] 2 6 5-102448-1

FINISH	B	A	NO. OF POSN	PART NO.
		3	91.44 [3.600] 35 72 3-102448-4	
		3	88.90 [3.500] 34 70 3-102448-3	
		3	86.36 [3.400] 33 68 3-102448-2	
		3	83.82 [3.300] 32 66 3-102448-1	
10	OBSOLETE	3	81.28 [3.200] 31 64 3-102448-0	
10	OBSOLETE BY 1-102448-3	3	78.74 [3.100] 30 62 2-102448-9	
10	OBSOLETE	3	76.20 [3.000] 29 60 2-102448-8	
10	OBSOLETE BY 1-102448-3	3	73.66 [2.900] 28 58 2-102448-7	
		3	71.12 [2.800] 27 56 2-102448-6	
		3	68.58 [2.700] 26 54 2-102448-5	
		3	66.04 [2.600] 25 52 2-102448-4	
		3	63.50 [2.500] 24 50 2-102448-3	
		3	60.96 [2.400] 23 48 2-102448-2	
		3	58.42 [2.300] 22 46 2-102448-1	
		3	55.88 [2.200] 21 44 2-102448-0	
		3	53.34 [2.100] 20 42 1-102448-9	
		3	50.80 [2.000] 19 40 1-102448-8	
		3	48.26 [1.900] 18 38 1-102448-7	
		3	45.72 [1.800] 17 36 1-102448-6	
10	OBSOLETE BY 6-102448-5	3	43.18 [1.700] 16 34 1-102448-5	
10	OBSOLETE	3	40.64 [1.600] 15 32 1-102448-4	
		3	38.10 [1.500] 14 30 1-102448-3	
10	OBSOLETE	3	35.56 [1.400] 13 28 1-102448-2	
		3	33.02 [1.300] 12 26 1-102448-1	
		3	30.48 [1.200] 11 24 1-102448-0	
10	OBSOLETE	3	27.94 [1.100] 10 22 102448-9	
		3	25.40 [1.000] 9 20 102448-8	
		3	22.86 [.900] 8 18 102448-7	
		3	20.32 [.800] 7 16 102448-6	
		3	17.78 [.700] 6 14 102448-5	
		3	15.24 [.600] 5 12 102448-4	
		3	12.70 [.500] 4 10 102448-3	
10	OBSOLETE BY 5-102448-2	3	10.16 [.400] 3 8 102448-2	
10	OBSOLETE	3	7.62 [.300] 2 6 102448-1	

THIS DRAWING IS A CONTROLLED DOCUMENT.

APPROVED: S. SHUEY, M. RIDER, R. FELLIX

DATE: 06JAN92, 07JAN92

NAME: AMPMODU MT, RCPT ASSY, STANDARD PRESSURE CONTACTS FOR 20-22 AWG WIRE SIZE

PRODUCT SPEC: 108-25015

APPLICATION SPEC: 114-25032

SIZE: A1

WEIGHT: 100779

CUSTOMER DRAWING: 102448

SCALE: 4:1

SHEET: 1 OF 1

REV: R2

STE TE Connectivity