


ACG-204

Industrial Remote Display Client Gateway

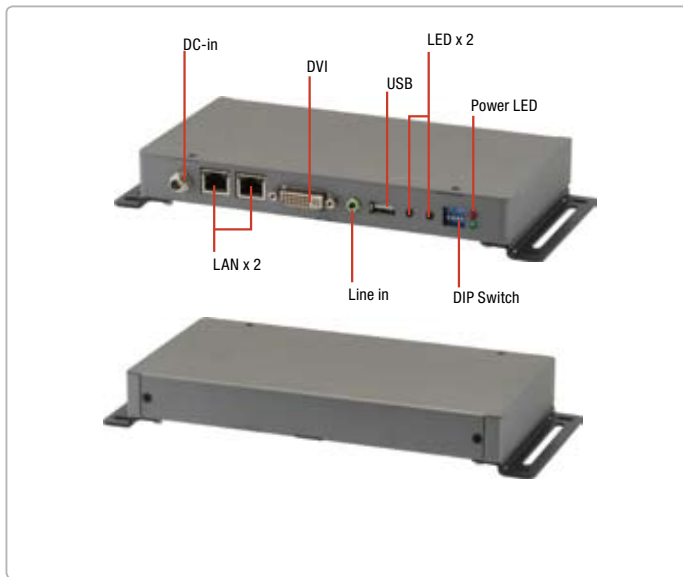

Specifications

System	
Front I/O	DVI/VGA x 1 RJ-45 x 2 SW x 2 LED x 2 Line-out x 1 DIP switch x 1 USB type A x 1 (ACG-204-A2)
Rear I/O	—
Side I/O	—
OS support	Windows® XP, Windows® 7
Mechanical	
Construction	Steel front bezel & chassis
Mounting	Wallmount
Dimension	8.19" x 4.23" x 0.98" (208mm x 107.5mm x 25 mm)
Carton Dimension	11.61" x 10.43" x 2.95" (295mm x 265mm x 75 mm)
Gross Weight	2.99 lb (1.36kg)
Net Weight	1.23 lb (0.56kg)
Environmental	
Operating Temperature	32°F ~122°F (0°C~50°C)
Storage Temperature	-4°F ~140°F (-20°C~60°C)
Storage Humidity	10%~95% @40°C, non-condensing
Vibration	1g rms/ 5~500Hz / Random operation
Shock	15 G peak acceleration (11 msec. Duration)
EMC	CE/FCC Class A
Power Supply	
DC input	12VDC w/ power adapter

Note: The ACG-204 has to work with the ACG-203.

Features

- Supports Remote Display Function
- Easy-To-Install: RJ-45 Cable x 1
- Easy-To-Deploy : TCP/IP Protocol Support
- Wallmount



Ordering Information

- **TF-ACG-204-A1-1010**
Industrial Remote Display Client Gateway (One to Multiple Networks/Displays)
- **TF- ACG-204-A2-1010**
Industrial Remote Display Client Gateway (One to One Network/Display)

Optional Accessories

- **1757306007**
Power Adapter 12V DC in 60W with Lock
- **1702031802**
Power Cord (US Type)
- **1702031803**
Power Cord (European Type)
- **170203180E**
Power Cord (Japanese Type)