




DUAL-IN-LINE HEADERS


Gull Wing Shrink DIP Headers and Strips

Surface Mount Solder Tail

Series 162, 862

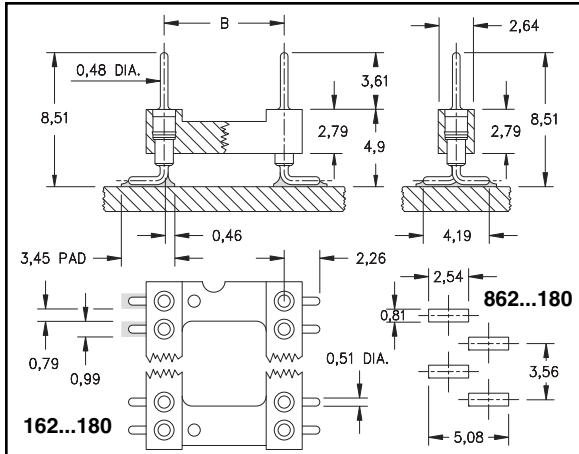

- Surface mount Gull Wing DIP sockets and strips for devices featuring 1,78 lead spacing.
- Gull wing terminals for max. strength and easy in-circuit test.
- Series 162 and Series 862 use MM #6218 pins. See page 175 for details.
- Insulators are high temperature thermoplastic.

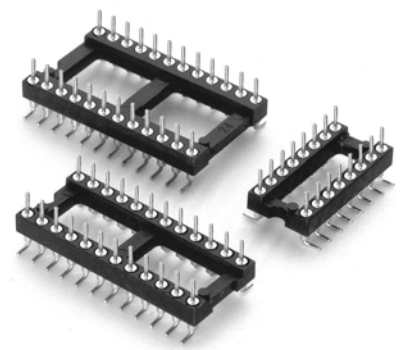

Total number of pins				Quantity per tube	<h2>Ordering Information</h2>
	A	B	C		

	A	B	C		
16	14,53	7,62	9,91	35	162-XX-316-30-180000
28	25,20	10,16	12,45	20	162-XX-428-30-180000
30	26,97	10,16	12,45	18	162-XX-430-30-180000
48	42,98	10,16	12,45	12	162-XX-448-30-180000
20	18,08	15,24	17,53	28	162-XX-620-30-180000
28	25,20	15,24	17,53	20	162-XX-628-30-180000
40	35,86	15,24	17,53	14	162-XX-640-30-180000
42	37,64	15,24	17,53	13	162-XX-642-30-180000
48	42,98	15,24	17,53	12	162-XX-648-30-180000
52	46,53	15,24	17,53	11	162-XX-652-30-180000
56	50,09	15,24	17,53	10	162-XX-656-30-180000
64	57,20	15,24	17,53	9	162-XX-664-30-180000
68	60,76	15,24	17,53	8	162-XX-668-30-180000
64	57,20	19,05	21,34	8	162-XX-764-30-180000



For RoHS compliance select ◇ plating code.

For Electrical, Mechanical & Environmental Data, See pg. 4

XX=Plating Code See Below

		<h3>SINGLE ROW STRIP SMT HEADER</h3> <p>If desired, we will supply any length up to 21 pins.</p>
--	--	--

21	37,64	- - -	2,64	-	862-XX-121-30-180000
----	-------	-------	------	---	----------------------

Coplanarity 0,13. For Pin Counts >10 positions consult Technical Support.	SPECIFY PLATING CODE XX=	10◇	90	40◇	
	Pin Plating	0,25µm Au	5,08µm Sn/Pb	5,08µm Sn	