


For RoHS compliance select \diamond plating code.

- Headers (350 & 450) use MM# 3404 pins. See page 170 for details.
- Sockets (310 & 410) use MM# 1005 receptacles and accept pin diameters from .015-.025. See page 135 for details.
- Coplanarity .005" (Single Row max 10 pins; Double Row max 20 pins) for higher pin counts contact tech support.
- Insulators are high temp. thermoplastic.

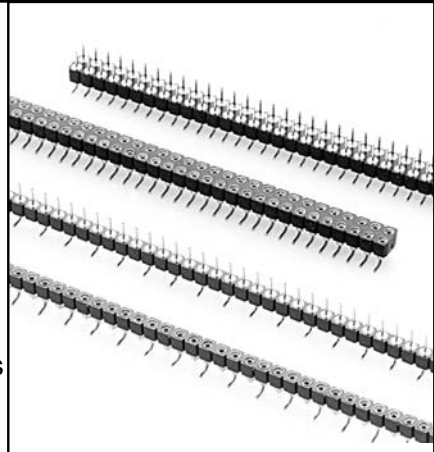

Ordering Information

Fig. 1L	Single Row Header, Left Hand Footprint Odd or Even # of pins			
	350-XX-1__-00-106000		Specify # of pins \rightarrow 02-64	
Fig. 1R	Single Row Header, Right Hand Footprint Even # of pins			
	350-XX-1__-00-107000		Specify even # of pins \rightarrow 02-64	
Fig. 2	Double Row Header, Even # of pins			
	450-XX-2__-00-106000		Specify even # of pins \rightarrow 04-72	
SPECIFY PLATING CODE XX=		10 \diamond	90	40 \diamond
Pin Plating		10 μ " Au	200 μ " Sn/Pb	200 μ " Sn
Fig. 3L	Single Row Socket, Left Hand Footprint Odd or Even # of pins			
	310-XX-1__-41-105000		Specify # of pins \rightarrow 02-64	
Fig. 3R	Single Row Socket, Right Hand Footprint Even # of pins			
	310-XX-1__-41-107000		Specify even # of pins \rightarrow 02-64	
Fig. 4	Double Row Socket, Even # of pins			
	410-XX-2__-41-105000		Specify even # of pins \rightarrow 04-72	
SPECIFY PLATING CODE XX=				43 \diamond
Sleeve (Pin)				200 μ " Sn
Contact (Clip)				30 μ " Au