


# High-Reliability Power Inductors MS514PYA

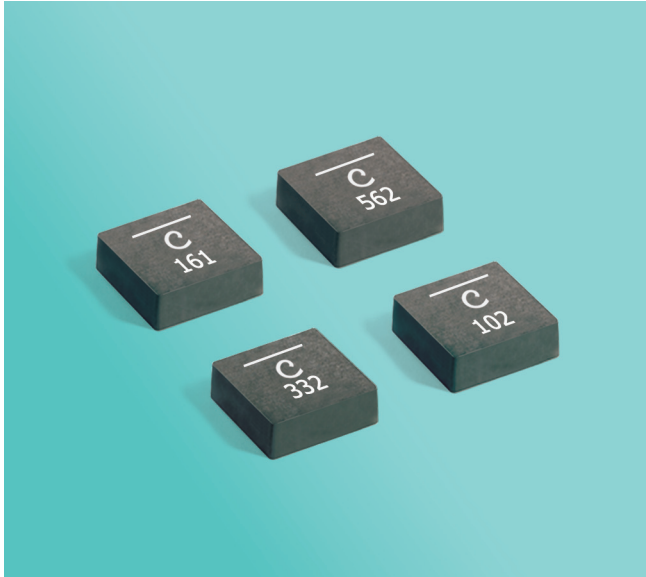

- High temperature materials allow operation in ambient temperatures up to 155°C
- Passes vibration testing to 80 G and shock testing to 1000 G
- Tin-lead (Sn-Pb) termination for the best possible board adhesion
- High current and very low DCR
- Soft saturation makes them ideal for VRM/VRD applications.

**Core material** Composite

**Terminations** Tin-lead (63/37) over copper.

**Weight** 0.83 – 0.86 g

**Ambient temperature** –55°C to +105°C with Irms current, +105°C to +155°C with derated current

**Storage temperature** Component: –55°C to +155°C.

Tape and reel packaging: –55°C to +80°C

**Resistance to soldering heat** Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

**Moisture Sensitivity Level (MSL)** 1 (unlimited floor life at <30°C / 85% relative humidity)

**Enhanced crush-resistant packaging** 250 per 7" reel  
Plastic tape: 16 mm wide, 0.35 mm thick, 12 mm pocket spacing, 3.0 mm pocket depth

Part number <sup>1</sup>	Inductance <sup>2</sup> ±20% (µH)	DCR (mOhms) <sup>3</sup>		SRF (MHz) <sup>4</sup>		Isat <sup>5</sup> (A)	Irms (A) <sup>6</sup>	
		typ	max	min	typ		20°C rise	40°C rise
MS514PYA161MSZ	0.16	1.15	1.26	126	158	60.0	18.7	24.4
MS514PYA301MSZ	0.30	1.75	1.92	81	101	41.0	15.8	20.7
MS514PYA601MSZ	0.60	3.00	3.30	58	72	36.0	13.5	17.3
MS514PYA102MSZ	1.0	4.55	5.00	50	63	28.0	12.1	16.4
MS514PYA152MSZ	1.5	7.60	8.36	41	51	23.5	8.9	11.3
MS514PYA222MSZ	2.2	13.70	15.07	32	40	18.0	7.5	9.7
MS514PYA272MSZ	2.7	15.70	17.30	29	36	12.8	6.7	8.6
MS514PYA332MSZ	3.3	19.50	21.45	23	29	12.3	6.0	7.5
MS514PYA472MSZ	4.7	25.20	27.72	17	21	12.0	5.2	6.8
MS514PYA562MSZ	5.6	30.25	33.30	14	17	11.5	4.0	5.5
MS514PYA682MSZ	6.8	38.70	42.57	12	15	10.7	3.3	5.1
MS514PYA822MSZ	8.2	44.30	48.73	10	13	10.2	2.2	4.4

1. When ordering, please specify **testing** code:

**MS514PYA822MSZ**

**Testing:** Z = COTS

H = Screening per Coilcraft CP-SA-10001

N = Screening per Coilcraft CP-SA-10004

2. Inductance tested at 100 kHz, 0.1 Vrms using an Agilent/HP 4192A.

3. DCR measured using a micro-ohmmeter.

4. SRF measured using an Agilent/HP 4395A or equivalent.

5. Typical dc current at which the inductance drops 30% from its value without current.

6. Typical current that causes the specified temperature rise from 25°C ambient.

7. Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.













## Irms Testing

Irms testing was performed on a 0.060" thick pcb with 4 oz. copper traces optimized to minimize additional temperature rise.

Temperature rise is highly dependent on many factors including pcb land pattern, trace size, and proximity to other components. Therefore temperature rise should be verified in application conditions.

# MS514PYA Series (7030)

## L vs Current

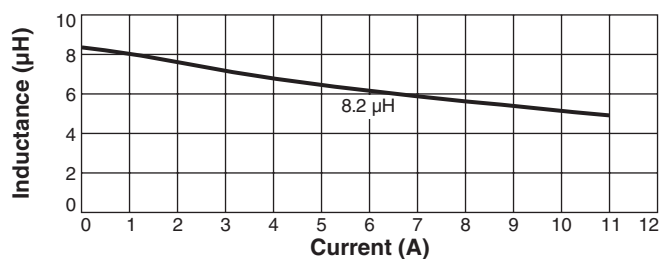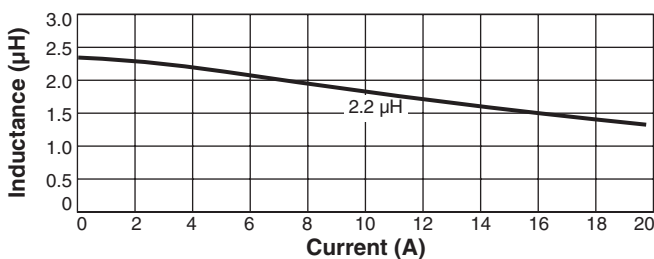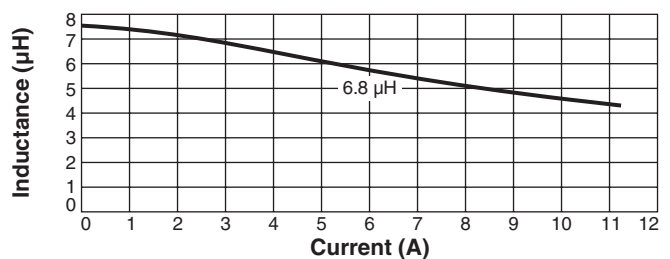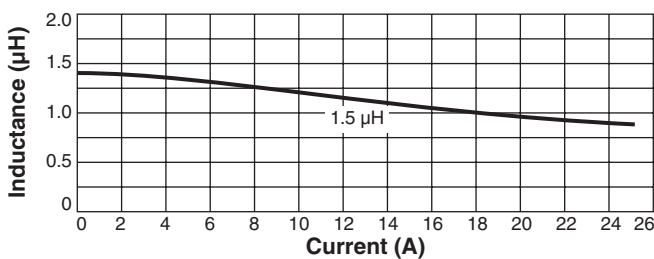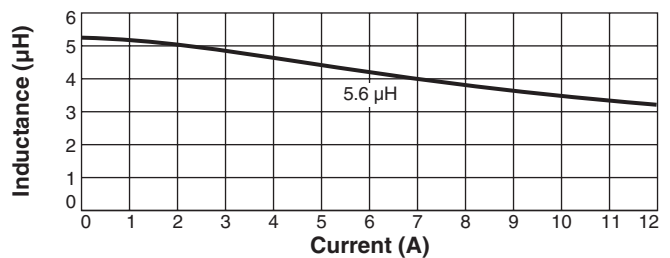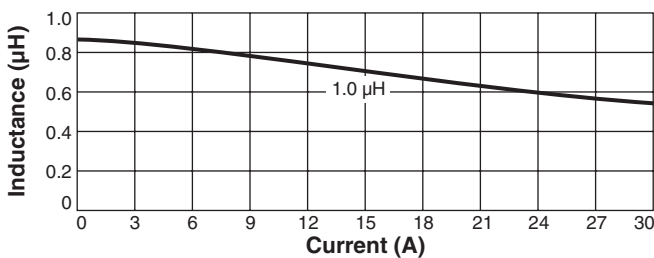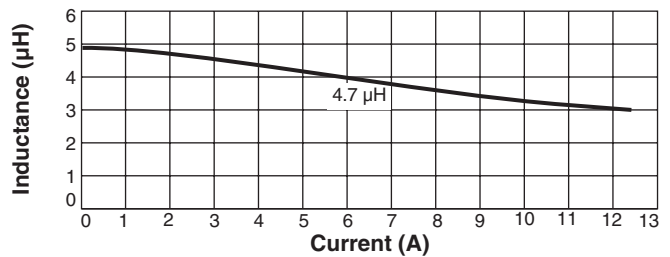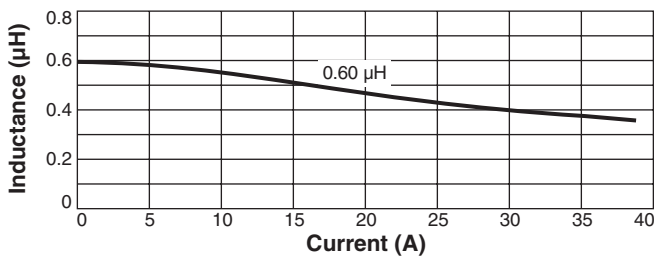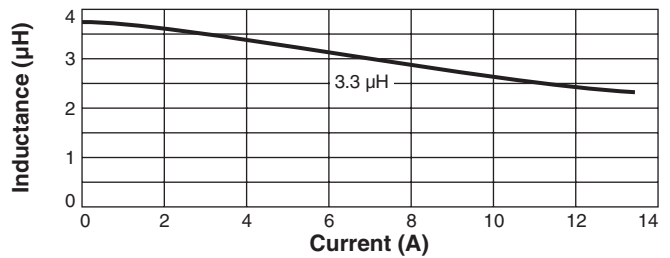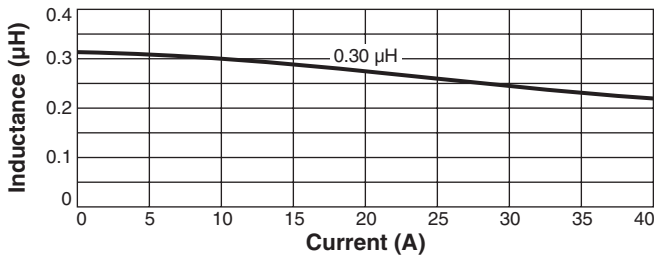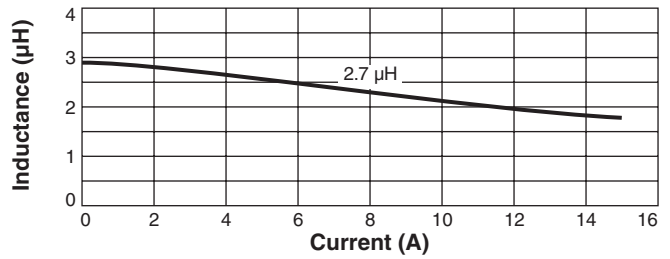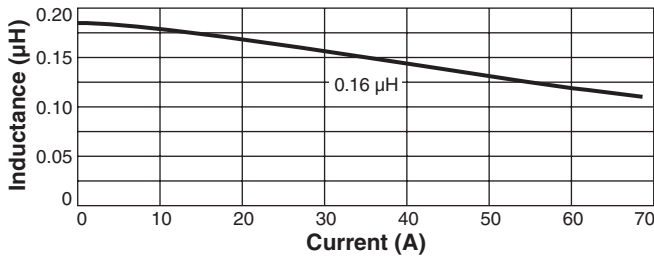

CRITICAL PRODUCTS & SERVICES

1102 Silver Lake Road  
Cary, IL 60013  
Phone 800-981-0363


Fax 847-639-1508  
Email cps@coilcraft.com  
www.coilcraft-cps.com

Document MS863-2 Revised 01/03/13



This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.

# MS514PYA Series (7030)



## Typical L vs Frequency

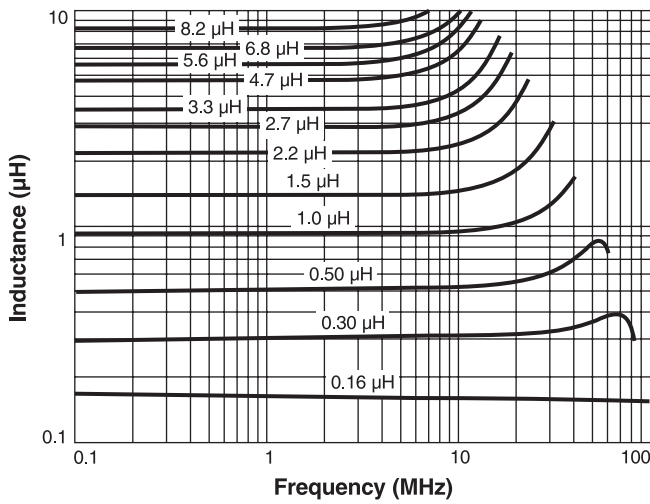

## Irms Derating

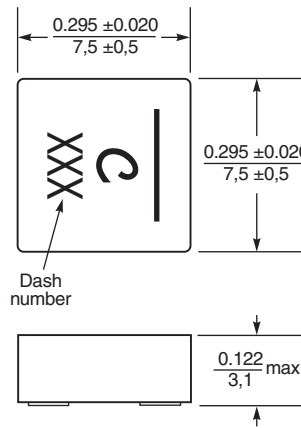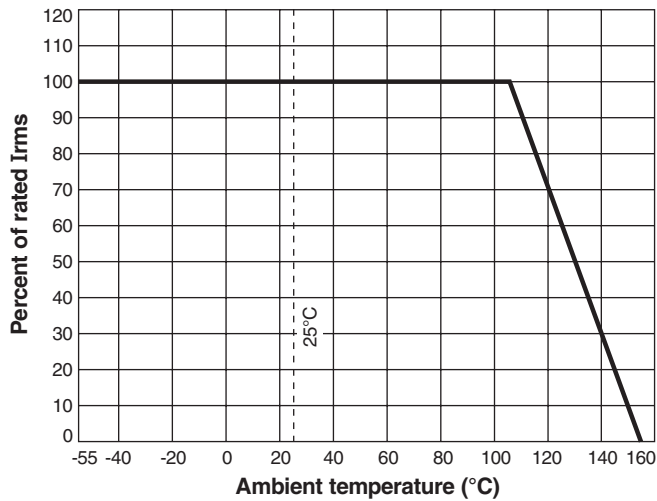

Dash number	A ±0.008 in ±0.20 mm (in / mm)	B (in / mm)
-161	0.261 / 6.62	0.274 / 6.97
-301	0.261 / 6.62	0.274 / 6.97
-601	0.253 / 6.42	0.263 / 6.67
-102	0.249 / 6.32	0.257 / 6.52
-152	0.245 / 6.22	0.251 / 6.37
-222	0.241 / 6.12	0.245 / 6.22
-272	0.241 / 6.12	0.245 / 6.22
-332	0.241 / 6.12	0.245 / 6.22
-472	0.239 / 6.08	0.242 / 6.16
-562	0.239 / 6.08	0.242 / 6.16
-682	0.238 / 6.04	0.240 / 6.10
-822	0.238 / 6.04	0.240 / 6.10



Dimensions are in  $\frac{\text{inches}}{\text{mm}}$

**Suggested Land Pattern**

