




Male Connectors Type Compact PCI (P1+P2/P4+P5)

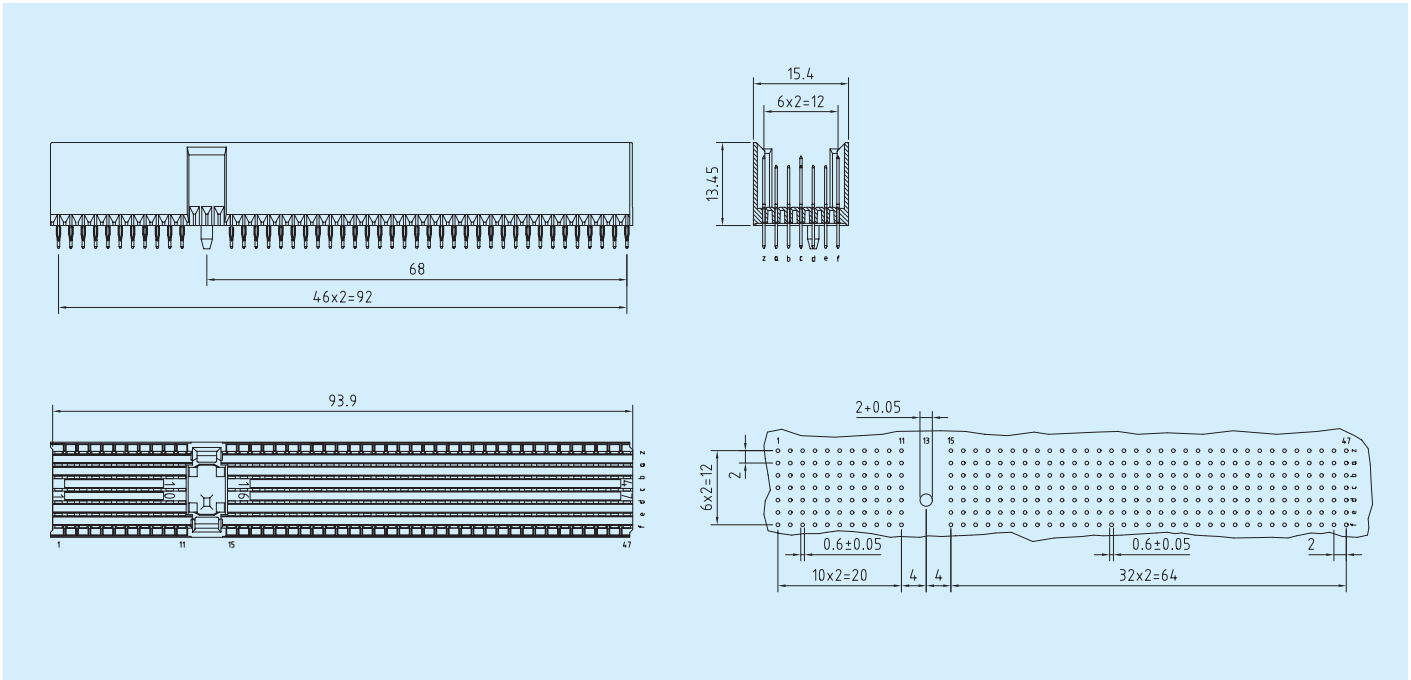

Assembly Drawing	No. of Pos.	Row	Type	Pin length	Part Numbers
	308	z a b c d e f	C B B + + B C	11,25/3,7 9,75/3,7 9,75/3,7 + /3,7 + /3,7 9,75/3,7 11,25/3,7	CHM-120230-508 * CHM-120230-509**
	308	z a b c d e f	C A A A A A C	11,25/3,7 8,25/3,7 8,25/3,7 8,25/3,7 8,25/3,7 8,25/3,7 11,25/3,7	CHM-M-A47-CAAAAAC-1* CHM-M-A47-CAAAAAC-2**
	308	z a b c d e f	T P P P P P T	11,25/16,0 9,75/14,5 9,75/14,5 9,75/14,5 9,75/14,5 9,75/14,5 11,25/16,0	CHM-M-A47-TPPPPT-1* CHM-M-A47-TPPPPT-2**

Insertion tool: Part Number 121586-5080

On request: Telephony Spec./Hot Swap

+ Attention: Please consider the different pin lengths in the assembly drawing.

\* Performance class I > 500 mating cycles \*\* Performance class II > 250 mating cycles