



Series 647 Universal SOIC to .600 [15.24] DIP Adapter

Features:


- 44 pin adapter for mounting Aries' Series 547 Universal SOIC ZIF (zero insertion force) Test Socket to .600 [15.24] DIP PCB layout. Consult Data Sheet No. 10015 for test socket information.

Specifications:

- Body material is black FR-406 or IS410 per IPCA4101A/26, .094 [2.39] thick, with 1 ounce min. Copper traces.
- Female pin body is Brass Alloy 360 1/2 hard per UNS C36000 ASTM-B16-00.
- Female pin body plating is 200µ [5.08µm] min. 93/7 Tin/Lead per ASTM B545 or 200µ [5.08µm] min. Tin per ASTM B545 Type 1 over 100µ [2.54µm] min. Nickel per SAE-AMS-QQ-N-290.
- 4-fingered collet contact is Beryllium Copper Alloy per UNS C17200 ASTM-B194-01.
- Collet contact plating is 10µ [.25µm] min. Gold per MIL-G-45204 over 50µ [1.27µm] min. Nickel per SAE-AMS-QQ-N-290.
- Male pin is Phosphor Bronze Alloy 544 UNS C5400 ASTM-B139-90.
- Male pin plating is 200µ [5.08µm] min. 93/7 Tin/Lead per ASTM B545 or 200µ [5.08µm] min. Tin per ASTM B545 Type 1 over 100µ [2.54µm] min. Nickel per SAE-AMS-QQ-N-290.
- Collet contact current rating=3 Amps.
- Operating temperature=221°F [105°C].
- Insertion Force=180 grams/pin; Withdrawal Force=90 grams/pin; Normal Force=140 grams/pin; based on a .018 [.46] diameter test lead.

Mounting Considerations:

- Suggested PCB hole size=.028 ± .002 [.71 ± .05] dia.

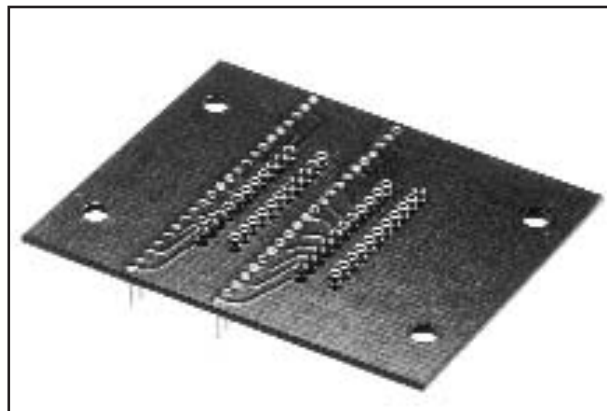


Note: Aries specializes in custom design and production. In addition to the standard products shown on this page, special materials, platings, sizes, and configurations can be furnished, depending on quantities. Aries reserves the right to change product specifications without notice.

ORDERING INFORMATION


Specify Part No. 44-647-10(Tin Version) or 44-647-10TL (Tin/Lead Version) when ordering

Consult Data Sheet No. 10015 for Universal SOIC ZIF Test Socket information.


ALL DIMENSIONS: INCHES [MILLIMETERS]

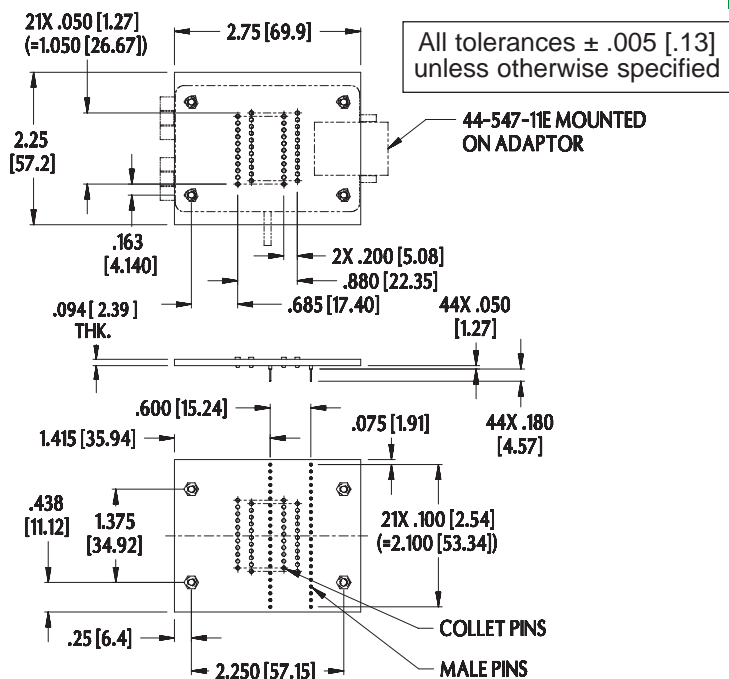

MOUNTING CONSIDERATIONS

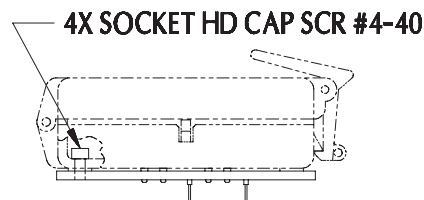

CONTACT DETAIL

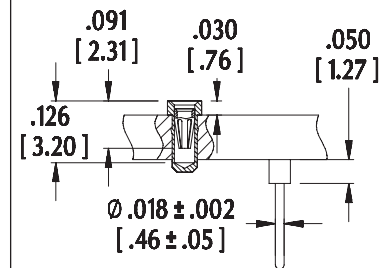

<http://www.arieselec.com> • info@arieselec.com

Frenchtown, NJ USA
TEL: (908) 996-6841
FAX: (908) 996-3891



10016 REV.D