

**GLP2**  
Cordless TX-LPF

Inquire

**Application**

for Spurious reduction

**Characteristics**


<b>GLP2</b>	
Zin/Zout	50 ohm Nominal
Pass Band	380 up to 382MHz
Insertion Loss	1.0dB max (380 up to 382MHz)
V.S.W.R	1.5 max (380 up to 382MHz)
Attenuation	30 dB min (760 up to 1146MHz)

**Number of ordered pieces**

1000pcs/Reel

**Dimensions**

Dimension (Unit : mm)

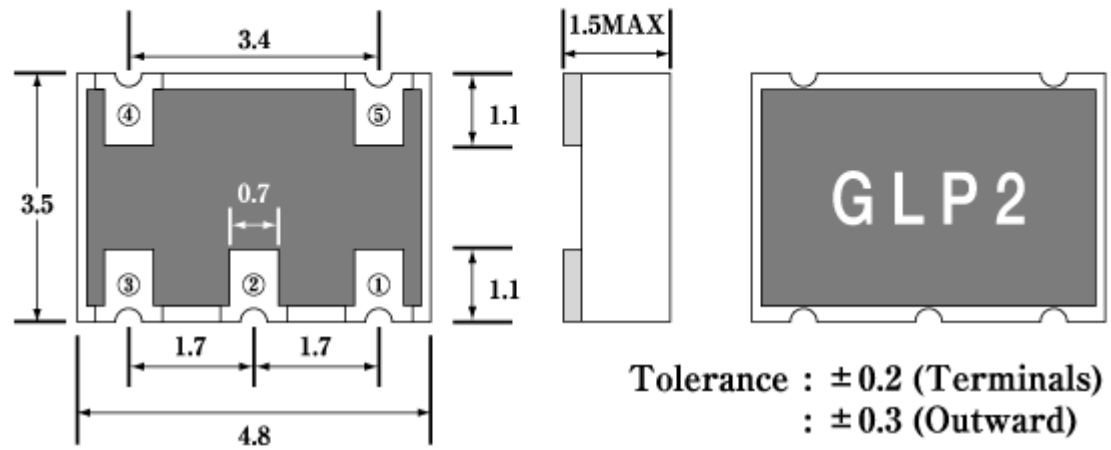


Tolerance :  $\pm 0.2$  (Terminals)  
:  $\pm 0.3$  (Outward)

Terminal	
①	Input
②	GND
③	Output
④	Fixed
⑤	Fixed

**Note**

Do not connect any wiring (inclusive of grounding) to terminals No.4 and No.5. They are provided solely for internal connections.

## Frequency Data

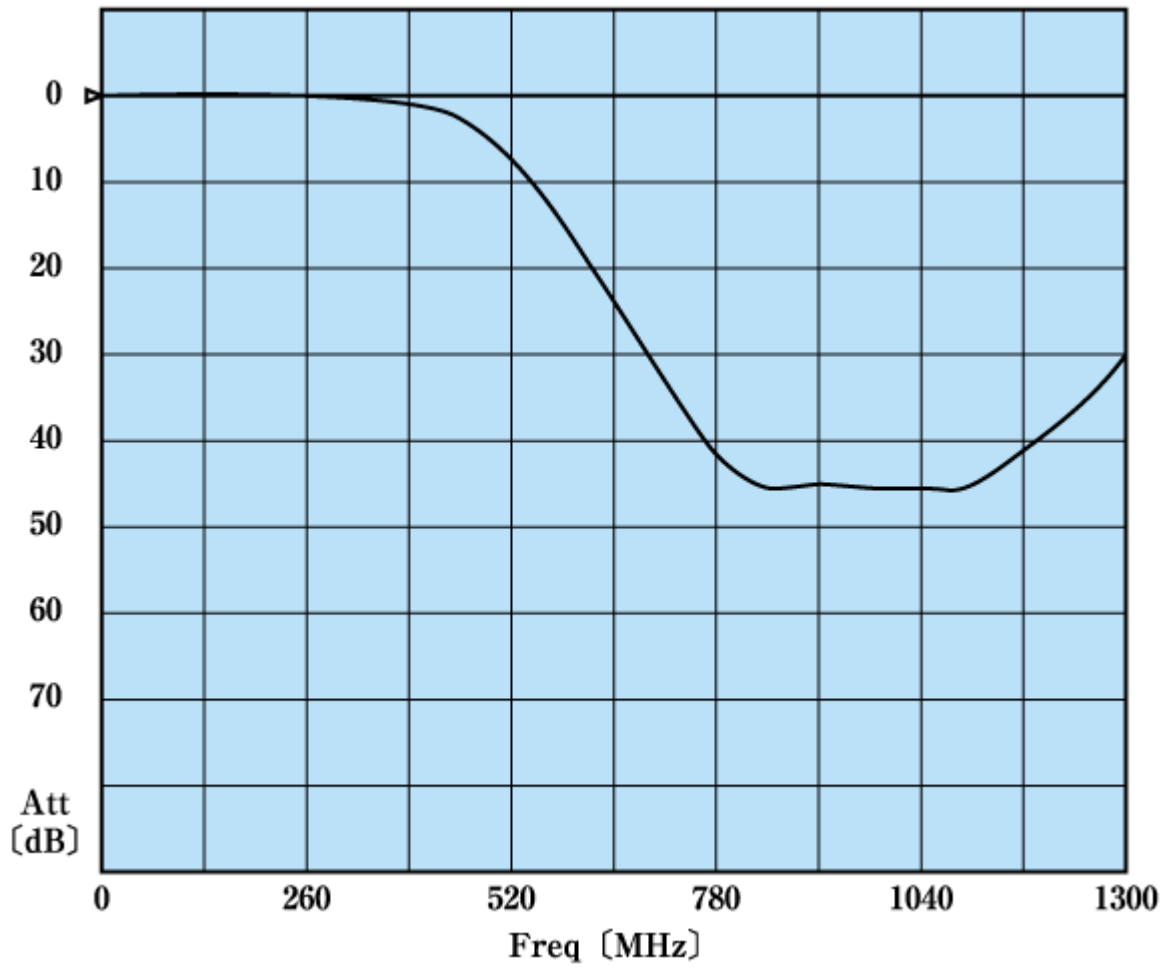

► Products li