



DIMENSIONS mm (inches)

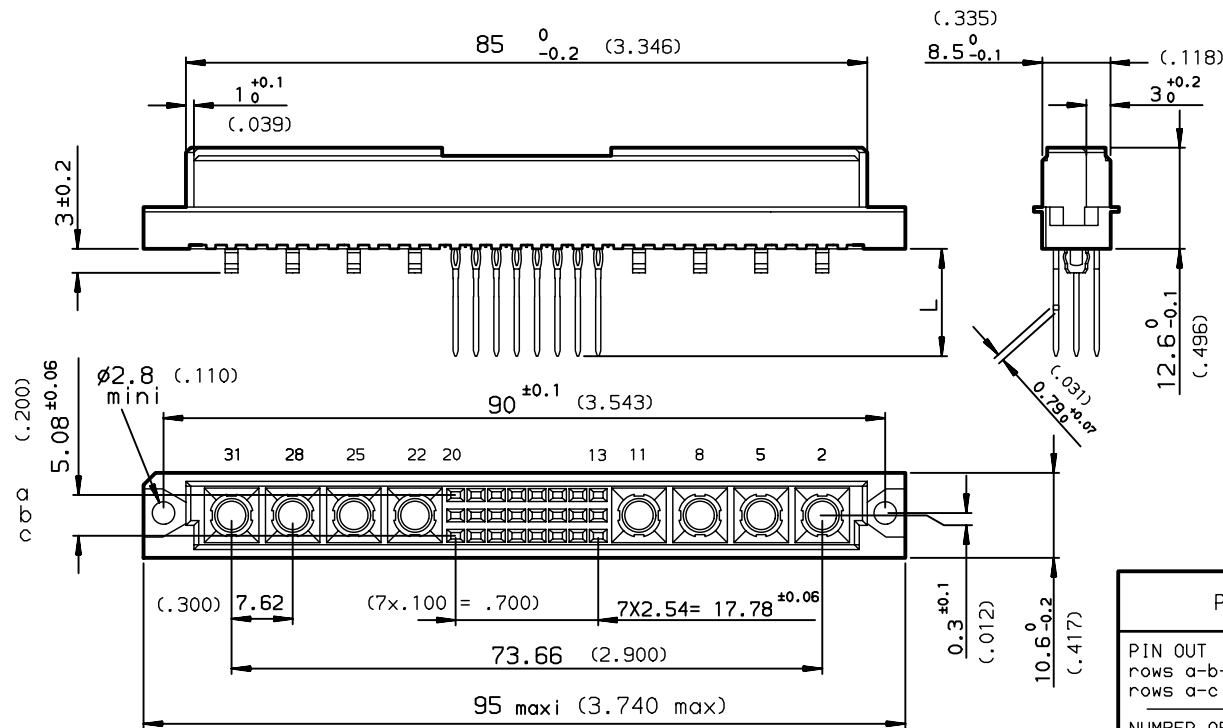


METHOD OF INSERTION
ON THE PCB = FLAT ROCK



PCB DRILLING
component side

PERFORMANCES AS PER DIN 41612

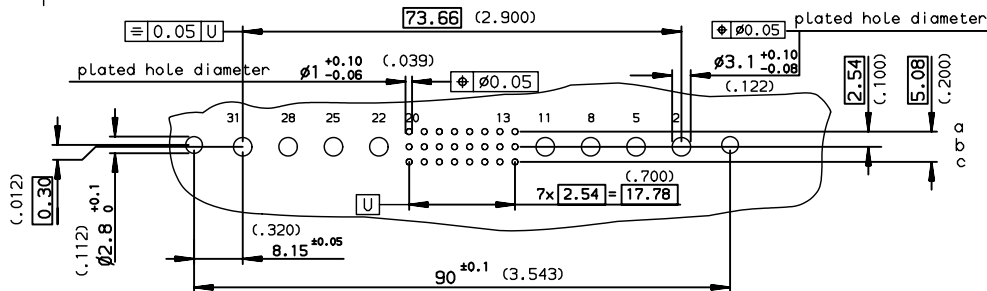

PART NUMBER	8609	HP	7	5
PIN OUT				
rows a-b-c			3	24
rows a-c			4	16
NUMBER OF CONTACTS				
TERMINATION				
L = 13.10 ±0.20 (.515)		1 wrap		91
L = 17.10 ±0.20 (.673)		2 wraps		92
L = 3.00 ±0.20 (.118)		short post		94
PERFORMANCE CLASS				
DIN 41612 class 3				4
DIN 41612 class 2				5
DIN 41612 class 1				6
TERMINATION TYPE				
TIN LEAD				000E3
LEAD FREE				E3LF

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C-8609-0000C

European Views

www.fciconnect.com	surface ISO 1302	tolerance std ISO 406 ISO 1101	projection mm
	✓		mm
TOLERANCES UNLESS OTHERWISE SPECIFIED			
Dr	ROUILLARD	1997/01/24	0.X ±0.1
Eng	TARON	1997/01/24	0.XX ±0.1
Chr	LEGARE	1997/01/24	0.XX' ±2'
Appr	LEGARE	1997/01/24	0.XXX ±0.1
Product family		DIN 8609	size A3
Spec ref		-	Scale 1.5
			ECN LS06-0095

rev	ecn no	dr	date
C	-	ROU	1997/11/05
D	LS05-004	JTA	2005/02/28
E	LS06-0095	LGO	2006/07/12
-	-	-	-
-	-	-	-
-	-	-	-



STRAIGHT FEMALE - STYLE M
PRESS FIT

dwg no C-8609-0528

Rev. E

catalog no - CUSTOMER sheet 1 of 1

Copyright FCI.