



## Isolated Ultra Fast Rectifiers

### FEATURES

- UL Recognized File # E-326243
- High efficiency, low VF
- High current capability
- High reliability
- High surge current capability
- Compliant to RoHS Directive 2011/65/EU and in accordance to WEEE 2002/96/EC
- Halogen-free according to IEC 61249-2-21 definition


**ITO-220AB**


### MECHANICAL DATA

**Case :** ITO-220AB

Molding compound, UL flammability classification rating 94V-0

Base P/N with suffix "G" on packing code - halogen-free, RoHS compliant

**Terminal :** Matte tin plated leads, solderable per JESD22-B102

Meet JESD 201 class 1A whisker test

**Polarity :** As marked

**Mounting torque :** 5 in-lbs maximum

**Weight :** 1.7 gram (approximately)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS (T <sub>A</sub> =25°C unless otherwise noted)								
PARAMETER	SYMBOL	UGF 1004GA	UGF 1005GA	UGF 1006GA	UGF 1007GA	UGF 1008GA	UNIT	
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	200	300	400	500	600	V	
Maximum RMS voltage	V <sub>RMS</sub>	140	210	280	350	420	V	
Maximum DC blocking voltage	V <sub>DC</sub>	200	300	400	500	600	V	
Maximum average forward rectified current	I <sub>F(AV)</sub>	10						A
Peak forward surge current, 8.3 ms single half sine-wave superimposed on rated load	I <sub>FSM</sub>	70						A
Maximum instantaneous forward voltage (Note 2) IF= 5 A	V <sub>F</sub>	0.95	1.25	1.70			V	
Maximum reverse current @ rated VR T <sub>J</sub> =25 °C T <sub>J</sub> =125 °C	I <sub>R</sub>	10			100		uA	
Maximum reverse recovery time (Note 2)	T <sub>rr</sub>	20			25		nS	
Typical thermal resistance	R <sub>θJC</sub>	6.0					°C/W	
Operating junction temperature range	T <sub>J</sub>	- 55 to + 175			- 55 to + 150		°C	
Storage temperature range	T <sub>STG</sub>	- 55 to + 175			- 55 to + 150		°C	

Note 1: Pulse Test with PW=300 usec, 1% Duty Cycle

Note 2: Reverse Recovery Test Conditions: I<sub>F</sub>=0.5A, I<sub>R</sub>=1.0A, I<sub>RR</sub>=0.25A

ORDERING INFORMATION				
PART NO.	PACKING CODE	GREEN COMPOUND CODE	PACKAGE	PACKING
UGF100xGA (Note 1)	C0	Suffix "G"	ITO-220AB	50 / Tube

Note 1: "xx" defines voltage from 200V (UGF1004GA) to 600V (UGF1008GA)

EXAMPLE				
PREFERRED P/N	PART NO.	PACKING CODE	GREEN COMPOUND CODE	DESCRIPTION
UGF1004GA C0	UGF1004GA	C0		
UGF1004GA C0G	UGF1004GA	C0	G	Green compound

**RATINGS AND CHARACTERISTICS CURVES**

(TA=25°C unless otherwise noted)






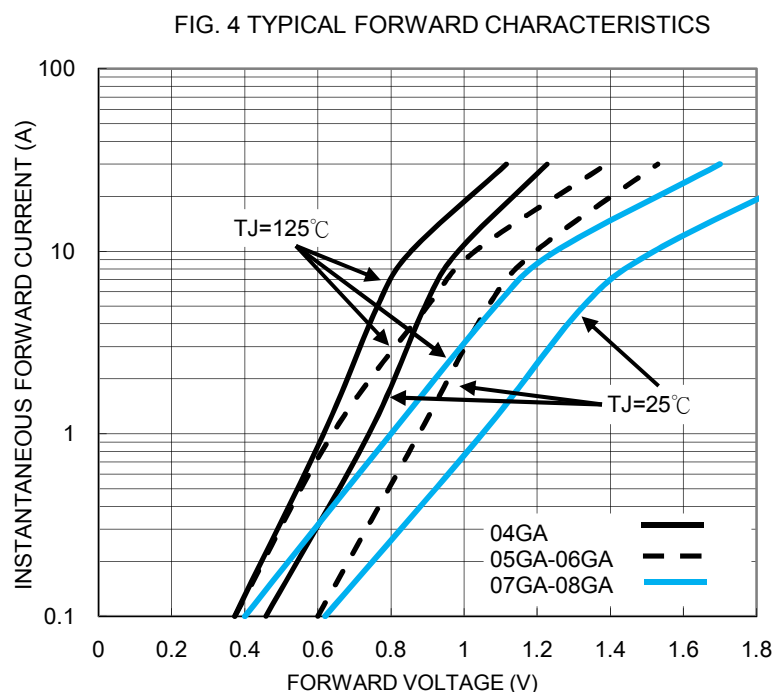


FIG. 5 TYPICAL JUNCTION CAPACITANCE

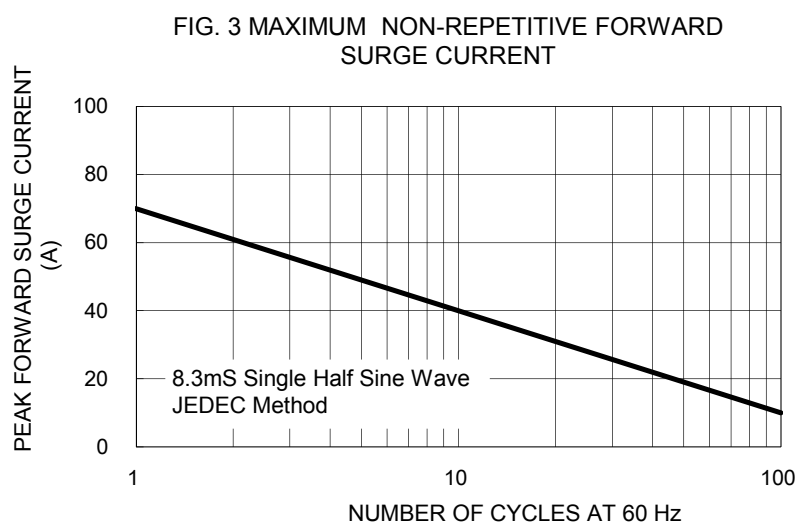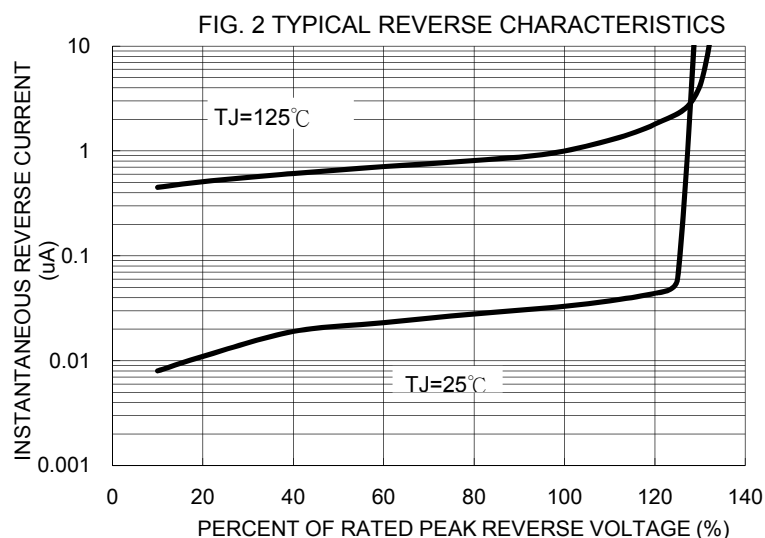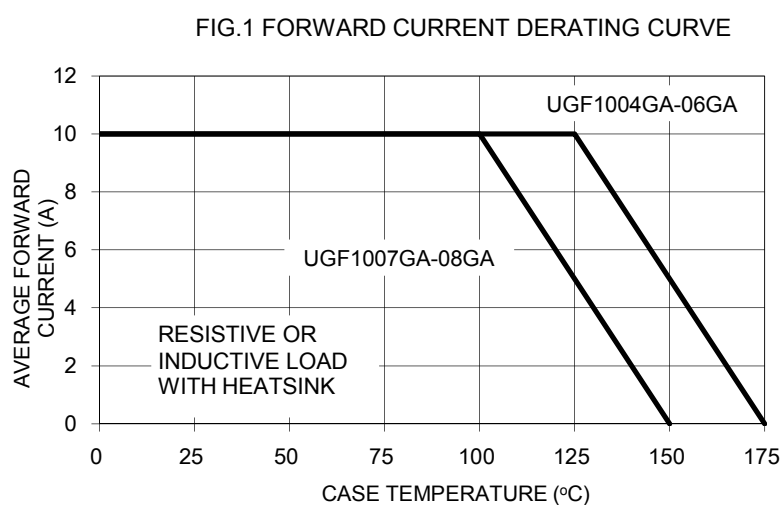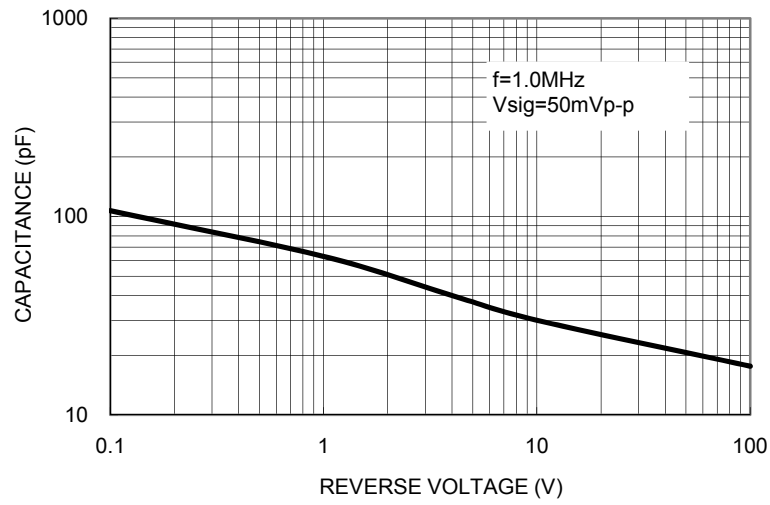


PACKAGE OUTLINE DIMENSIONS

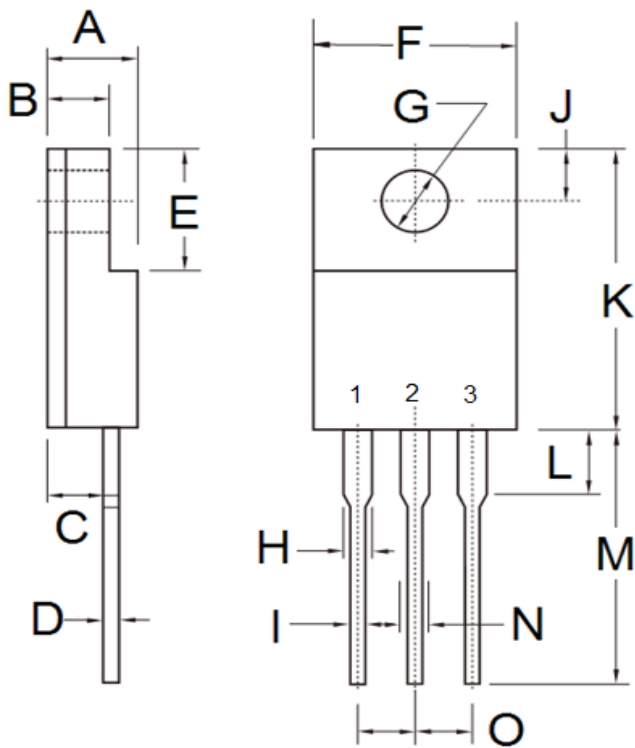

DIM.	Unit(mm)		Unit(inch)	
	Min	Max	Min	Max
A	4.30	4.70	0.169	0.185
B	2.50	3.16	0.098	0.124
C	2.30	2.96	0.091	0.117
D	0.46	0.76	0.018	0.030
E	6.30	6.90	0.248	0.272
F	9.60	10.30	0.378	0.406
G	3.00	3.40	0.118	0.134
H	0.95	1.45	0.037	0.057
I	0.50	0.90	0.020	0.035
J	2.40	3.20	0.094	0.126
K	14.80	15.50	0.583	0.610
L	-	4.10	-	0.161
M	12.60	13.80	0.496	0.543
N	-	1.80	-	0.071
O	2.41	2.67	0.095	0.105

MARKING DIAGRAM



- P/N = Specific Device Code
- G = Green Compound
- YWW = Date Code
- F = Factory Code