





DIP & SMD DELAY LINES

20 TAPS • 24 PIN PACKAGE

DIP & SURFACE MOUNTING • G LEADS

PASSIVE SERIES

SERIES DIP-24 AND DIP-G24*

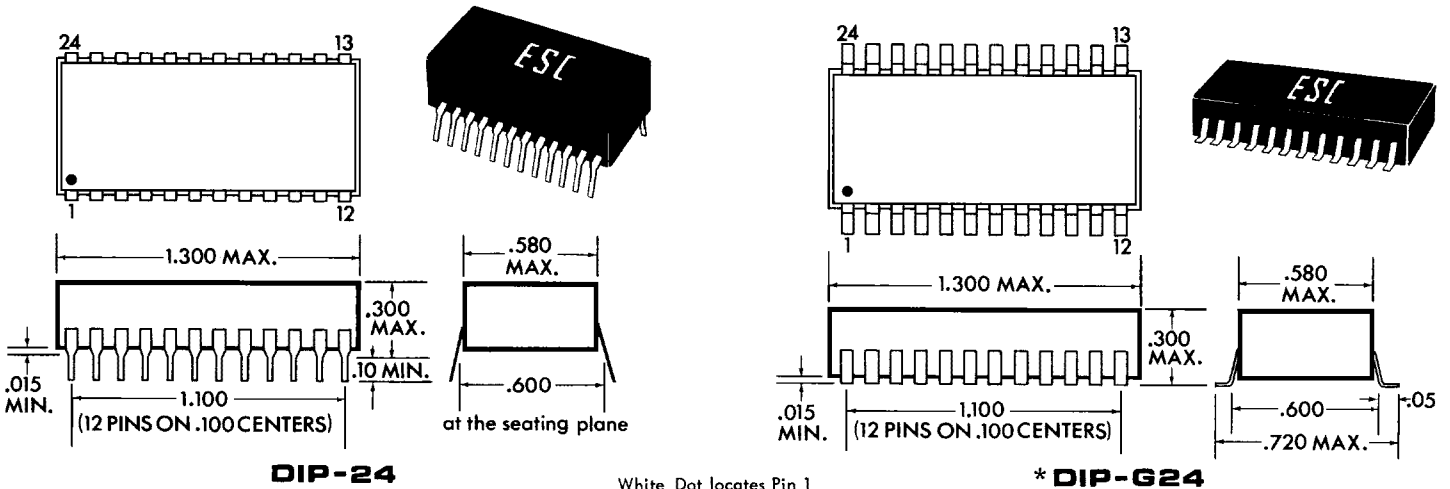

IMPEDANCE $\pm 10\%$ (OHMS) \longrightarrow			100	200	500
Time Delay $\pm 5\%$	Rise Time (nsec) Max	Delay per Tap $\pm 5\%$ or 1nsec WIG	MODEL NO.		
200	17	10.0	124-2	224-2	524-2
250	21	12.5	124-2.5	224-2.5	524-2.5
400	34	20.0	124-4	224-4	524-4
500	42	25.0	124-5	224-5	524-5
600	50	30.0	124-6	224-6	524-6
750	63	37.5	124-7.5	224-7.5	524-7.5
800	67	40.0	124-8	224-8	524-8
1000	84	50.0	124-10	224-10	524-10
1200	110	60.0	124-12	224-12	524-12
1500	125	75.0	124-15	224-15	524-15
2000	170	100.0	-	224-20	524-20

* For Gull Wing Surface Mount Package add prefix letter G. Example: 124-5 converts to G124-5.

SPECIFICATIONS:

- Operating temperature: -55°C to $+125^{\circ}\text{C}$
- Temperature Coefficient: 100 ppm/ $^{\circ}\text{C}$ max
- Attenuation: 1 db max
- Terminals: Electro tin plated Alloy 42
.020 w x .010 th.
- Distortion: 10% max
- Dielectric Strength: 50 VDC