


MPO-60S Series

Single Output, 60W Compact, Open Frame AC/DC Power Supplies

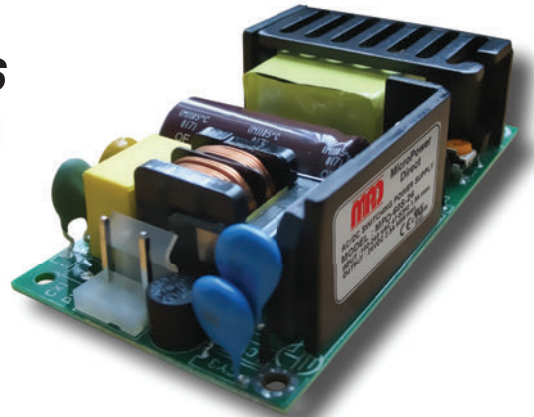

Key Features:

- 60W Output Power
- Universal 90-264 AC Input
- EN 60950 Approved (UL)
- Compact 2 x 4 In Package
- Eight Standard Models
- Meets EN 55022 B
- Meets EN 61000-4
- >200 kHour MTBF



MicroPower Direct

292 Page Street
Suite D
Stoughton, MA 02072
USA

T: (781) 344-8226
F: (781) 344-8481
E: sales@micropowerdirect.com
W: www.micropowerdirect.com



Electrical Specifications

Specifications typical @ +25°C, nominal input voltage & rated output current, unless otherwise noted. Specifications subject to change without notice.

Input

Parameter	Conditions	Min.	Typ.	Max.	Units
Input Voltage Range	Universal	90		264	VAC
		127		373	VDC
Input Frequency		47		63	Hz
Input Filter	Meets EN 55022 Class B; FCC Class B				
Input Current	See Model Selection Guide				
Inrush Current	Cold Start, 115 VAC			32.0	A Pk
	Cold Start, 230 VAC			50.0	
Safety Ground Leakage Current	264 VAC			3.5	mA

Output

Parameter	Conditions	Min.	Typ.	Max.	Units
Output Voltage/Current	See Model Selection Guide				
Output Voltage Tolerance	See Note 1		±1.0		%
Line Regulation	Vin = Min to Max		±0.5		%
Load Regulation	Iout = 10% to 100%		±1.0		%
Ripple & Noise (20 MHz)	See Note 2		±1.0		%
Hold-Up Time	115 VAC	8			mSec
	230 VAC	100			
Temperature Coefficient			±0.05		%/°C
Short Circuit Protection	Continuous (Autorecovery)				
Overload Protection	See Note 3		150		%

General

Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation Voltage	Input to Output	3,000			VAC
Isolation Resistance	500 VDC		1,000		MΩ
Isolation Capacitance			4,700		pF
EMC Compliance	Conducted	EN 55022; EN 61000-3-2, -3			
	Electrostatic Discharge (ESD)	IEC/EN 61000-4-2, -6, -8, -11			
	RF Field Susceptibility	IEC/EN 61000-4-3			
	Electrical Fast Transients/Bursts On Mains	IEC/EN 61000-4-4			
Switching Frequency	Surge	IEC/EN 61000-4-5			
	Fixed		66		kHz

Environmental

Parameter	Conditions	Min.	Typ.	Max.	Units
Operating Temperature Range	Ambient	0	+25	+50	°C
Storage Temperature Range		-20		+85	°C
Cooling	Free Air Convection (See Derating Curve)				
Humidity	RH, Non-condensing			95	%

Physical

Size	4.00 x 2.00 x 1.20 Inches (101.60 x 50.08 x 30.48 mm)				
Weight	5.21 Oz (0.150 kg)				

Reliability Specifications

Parameter	Conditions	Min.	Typ.	Max.	Units
MTBF	MIL HDBK 217F, 25°C, Gnd Benign	200			kHours
Safety Standards	UL 1950, EN 60950				
Vibration	Sinusoidal 50~500 Hz, 3.0 Grms, Period of 30 min each along X, Y & Z Axis				

www.micropowerdirect.com


Model Number	Input		Voltage (VDC)	Output		Max Output Power (W)	Max Output Capacitance (µF)	Efficiency (% Typ)
	Current (A)			Current (A)				
	115 VAC	230 VAC	Rated	% Min.				
MPO-60S-03	1.2	1.0	3.3	8.00	0.00	26	8,800	74
MPO-60S-05	1.2	1.0	5.0	8.00	0.00	40	8,800	78
MPO-60S-09	1.2	1.0	9.0	6.67	0.00	60	6,670	82
MPO-60S-12	1.2	1.0	12.0	5.00	0.00	60	5,000	84
MPO-60S-138	1.2	1.0	13.8	4.35	0.00	60	3,600	83
MPO-60S-15	1.2	1.0	15.0	4.00	0.00	60	3,600	85
MPO-60S-24	1.2	1.0	24.0	2.50	0.00	60	2,500	86
MPO-60S-48	1.2	1.0	48.0	1.25	0.00	60	770	88

Other Models Are Available. Contact The Factory For Details


Notes:

1. Output voltage tolerance is measured at nominal input and 60% load.
2. Output ripple is measured at 20 MHz bandwidth using 0.1 µF and 10 µF capacitors connected in parallel as close to the power supply terminals as possible.
3. Overload protection is provided by an internal "hiccup" circuit. The unit recovers automatically when the fault condition is removed.
4. These units will operate at no load without damage. For most applications however, MPD recommends that a minimum load always be used. Contact the factory for more information.
5. Each unit includes an input fuse (250V/2A). Since this fuse is not field replaceable, it is recommended that an external fuse of the same size be used on the input of the power supply for protection.

Derating Curve

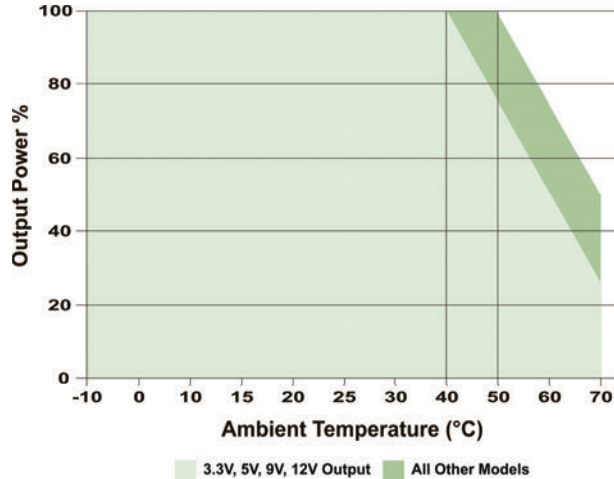

Mechanical Dimensions

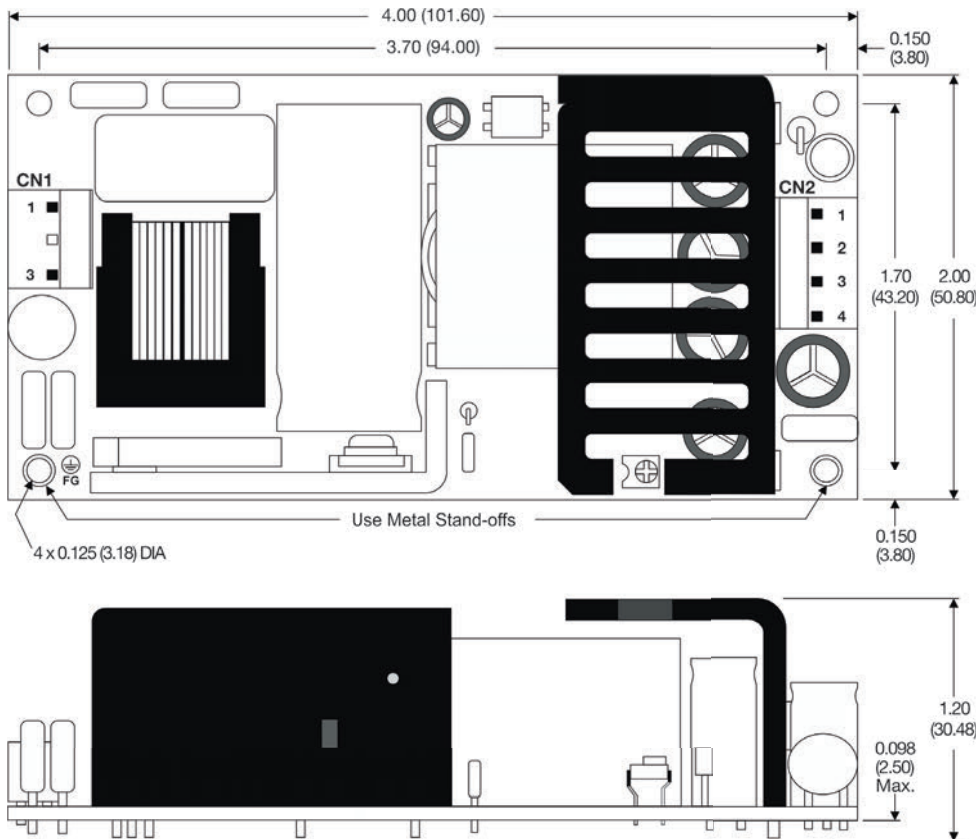

Connections

Input Connector (CN1):

- Molex 5273-03A or equivalent (one pin removed)
- Mating Housing: Molex 5195-03 or equivalent
- Mating Terminal: Molex 5293 or equivalent

Pin	Function
1	AC-Neutral
2	Removed
3	AC-Line

Safety Ground:

The mounting holes marked "Use metal standoffs" should be connected to the system earth ground via metal spacers or a cable. The input side mounting hole marked "FG" provides the safety earth ground for the unit. This connection should be locked to prevent possible loosening. Connecting the output side mounting hole improves EMI.

Output Connector (CN2):

- Molex 5273-04A or equivalent
- Mating Housing: Molex 5195-04 or equivalent
- Mating Terminal: Molex 5293 or equivalent

Pin	Function
1	+V _{OUT}
2	+V _{OUT}
3	-V _{OUT}
4	-V _{OUT}

Notes:

- All dimensions are typical in inches (mm)
- Tolerance x.xx = ±0.02 (±0.50)



MicroPower Direct
We Power Your Success - For Less!