




Suitable for high-d
installation of mini
lock(lockless) switc

● Moq: 1000PCS

■ Technical Feature

| Environmental Temperature | Relative Humidity | Rated Load | Contact Resistance | Insulation Resistance | Withstand Voltage | Operation Force |
|---------------------------|-------------------|------------|--------------------|-----------------------|--------------------|-----------------|
| -25--+70°C | (40°C) ≤95% | DC12V 50mA | ≤0.03Ω | ≥100MΩ | AC250V 50Hz/min | 100~300gf 100 |

■ Figure

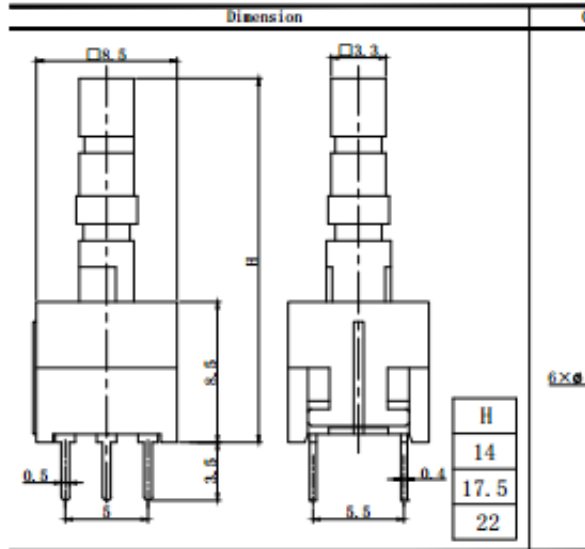

www.khan.cn

■ Soldering conditions

- condition for reflow

Available for surface mount/resistance high temper
1、heating method double heating method with in
2、Temperature measurement:0.1-φ0.2CA (K) or CC (foil surface). A heat resistive tape should be us
3、Temperatuer profile

