


D13

DIN 41612 (DUAL ROW)

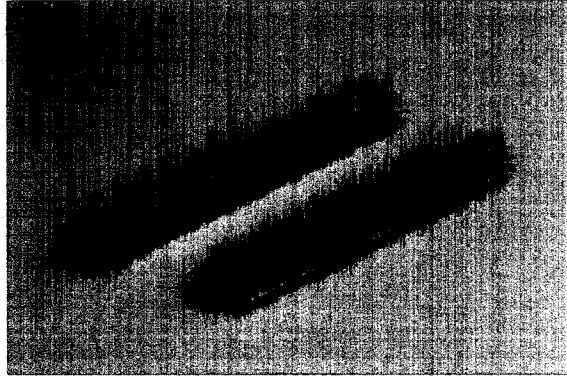


1.NO. OF CONTACT	2.CONTACT TYPE
8 16 32 64	M: MALE F: FEMALE A: MALE WITH BOARDLOCK B: FEMALE WITH BOARDLOCK
3.CONTACT PLATING	4.MOUNT TYPE
S: SELECTIVE G: GOLD FLASH A: 5u" GOLD B: 10u" GOLD C: 15u" GOLD D: 30u" GOLD	A: STRAIGHT B: RIGHT ANGLE
5.TYPE OPTION	6.TERMINAL INSERTED OPTION
A: B TYPE (LONG BODY) B: B TYPE (SHORT BODY) C: Q TYPE (LONG BODY) D: Q TYPE (SHORT BODY)	A: DUAL ROW (A+B) B: SINGLE ROW (A) C: SINGLE ROW (B)
7.CONTACT LENGTH	8.INSULATOR COLOR
A: 2.5mm B: 4.0mm C: 13.0mm D: 2.9mm (RIGHT ANGLE ONLY)	2: GREY

HOW TO ORDER:

D13 - - - - - - - -

D14

DIN 41612 (TRIPLE ROW)

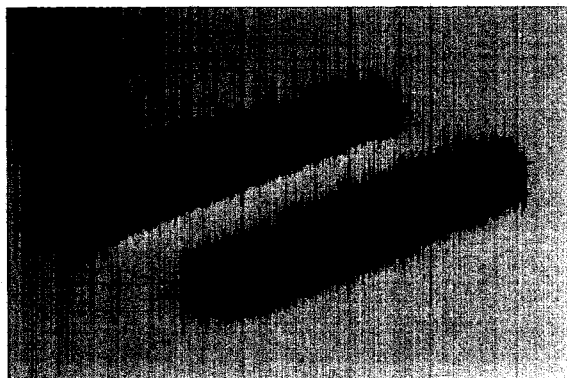

1.NO. OF CONTACT	2.CONTACT TYPE
16 32 48 64 96	M: MALE F: FEMALE A: MALE WITH BOARDLOCK B: FEMALE WITH BOARDLOCK
3.CONTACT PLATING	4.MOUNT TYPE
S: SELECTIVE G: GOLD FLASH A: 5u" GOLD B: 10u" GOLD C: 15u" GOLD D: 30u" GOLD	A: STRAIGHT B: RIGHT ANGLE
5.TYPE OPTION	6.TERMINAL INSERTED OPTION
A: C TYPE (LONG BODY) B: C TYPE (SHORT BODY) C: R TYPE (LONG BODY) D: R TYPE (SHORT BODY)	A: TRIPLE ROW (A+B+C) B: DUAL ROW (A+B) C: DUAL ROW (A+C) D: DUAL ROW (B+C)
7.CONTACT LENGTH	8.INSULATOR COLOR
A: 2.5mm B: 4.0mm C: 13.0mm D: 2.9mm (RIGHT ANGLE ONLY)	2: GREY

HOW TO ORDER:

D14 - - - - - - - -

