
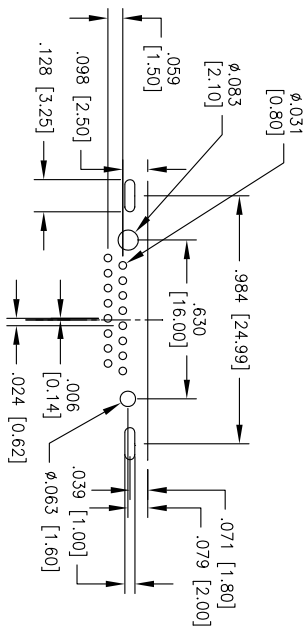




Rev	AWO #	Description	Date	Appr
-		RELEASED	4/26/10	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

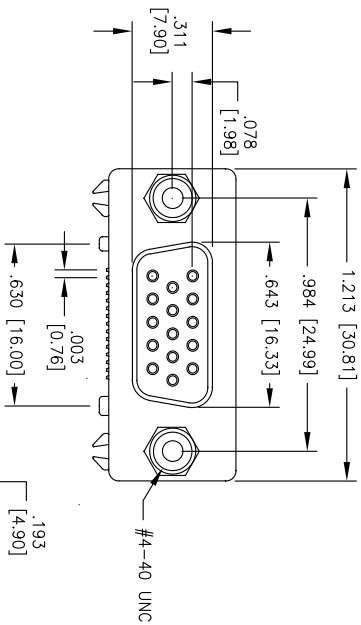

Recommended PCB Layout

PIN NUMBER : 6 11 2 8 13 4 10 15  
 1 7 12 3 9 14 5

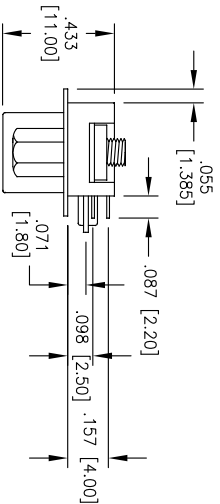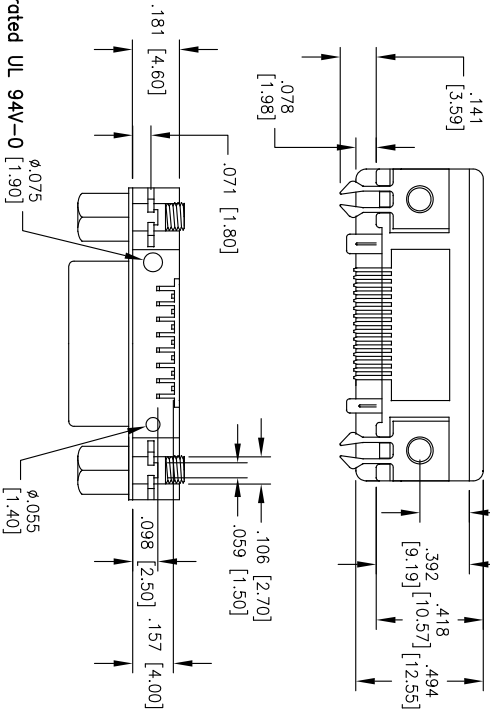

**SPECIFICATIONS:**

Material: Insulator: PBI, glass reinforced, rated UL 94V-0 [1.90]

Insulator color: Black

Contacts: Phosphor Bronze

Shell: Steel, Tin plated.

Plating: Gold flash over Nickel underplate overall.

Electrical:

Rated Voltage: 300V DC

Rated Current: 5A

Contact resistance: 13 mohms max

Insulation resistance: 1000 Mohms min@ DC 500V

Withstanding voltage: 500V AC for 1 minute

Temperature Rating:

Operating temperature: -55°C to +105°C

Environmental:

Lead free, RoHS compliant.

Recommended soldering temp: 235°C for 5 sec.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010

APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	

TITLE: D-SUB SOCKET, RIGHT ANGLE SLIM TYPE

**ADAM TECH**  
 909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

SIZE	PART NO.	SCALE	SHEET
X	HDL15-SUN-25	NIS	1 OF 1
REF: S00003T			

6

5

4

3

2

1