

# DIRECTIONAL COUPLER

## SURFACE MOUNT MODEL: GC6-2

**WIDE BANDWIDTH**


**1 - 700 MHz**

**FEATURES:**

- ▶ Low Insertion Loss
- ▶ Excellent Coupling Flatness
- ▶ Lead Free Patented Rel-Pro® Technology
- ▶ Small Size, Surface Mount




Part Identifier:  
Green Stripe

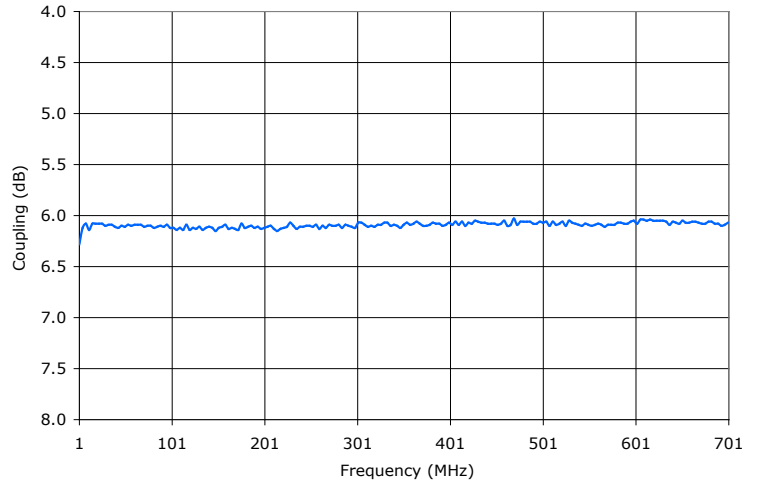

**SPECIFICATIONS**

<b>Frequency</b>	1 - 700 MHz		
<b>Coupling</b>	6 dB ±0.5 dB (Nom.)		
<b>Coupling Flatness</b>	±1.0 dB		
<b>Mainline Loss</b>	Freq. (MHz)	dB (Typ.)	dB (Max.)
	1 - 50	1.8	2.3
	50 - 350	2.0	2.5
<b>Directivity</b>	Freq. (MHz)	dB (Typ.)	dB (Min.)
	1 - 50	32	20
	50 - 350	26	18
	350 - 700	15	10
<b>Input Power Rating</b>	1 Watt (Max.)		
<b>Impedance</b>	50 Ohms (Nom.)		
<b>VSWR:</b>	1.40:1 (Typ.)		
<b>Operating Temperature Range</b>	-40 to +85 °C		


**Package #** 311

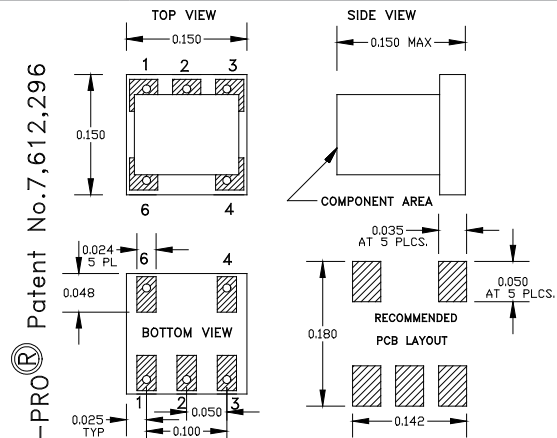

**PORT CONFIGURATION**

Input	Output	Coupled	Isolated*	Gnd.
6	1	4	3	2

\* Terminate with 50 Ohms externally.

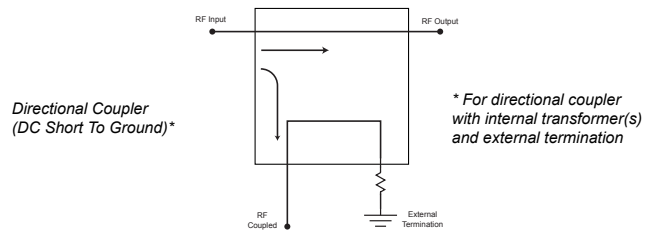



# DIRECTIONAL COUPLER

## SURFACE MOUNT MODEL: GC6-2

WIDE BANDWIDTH

1 - 700 MHz

PERFORMANCE PLOTS

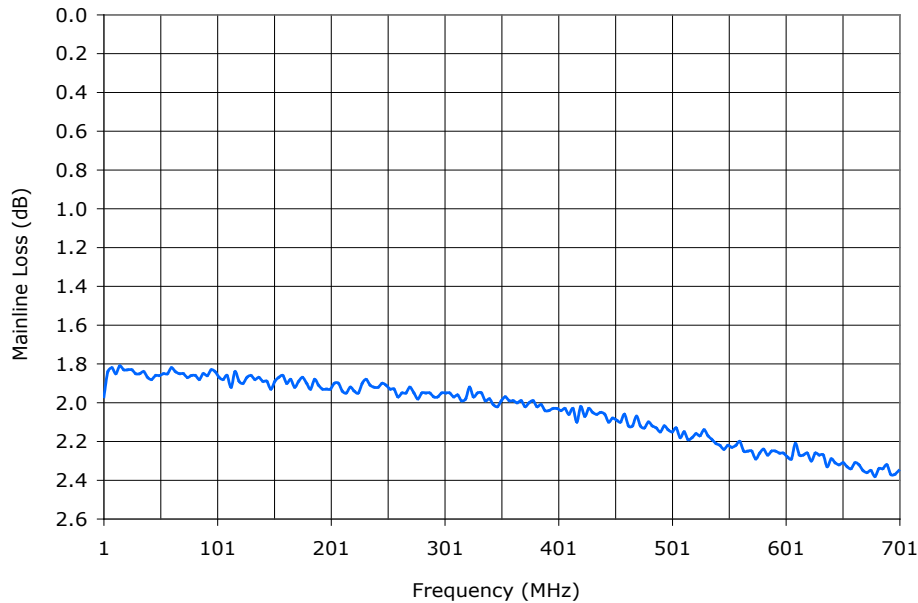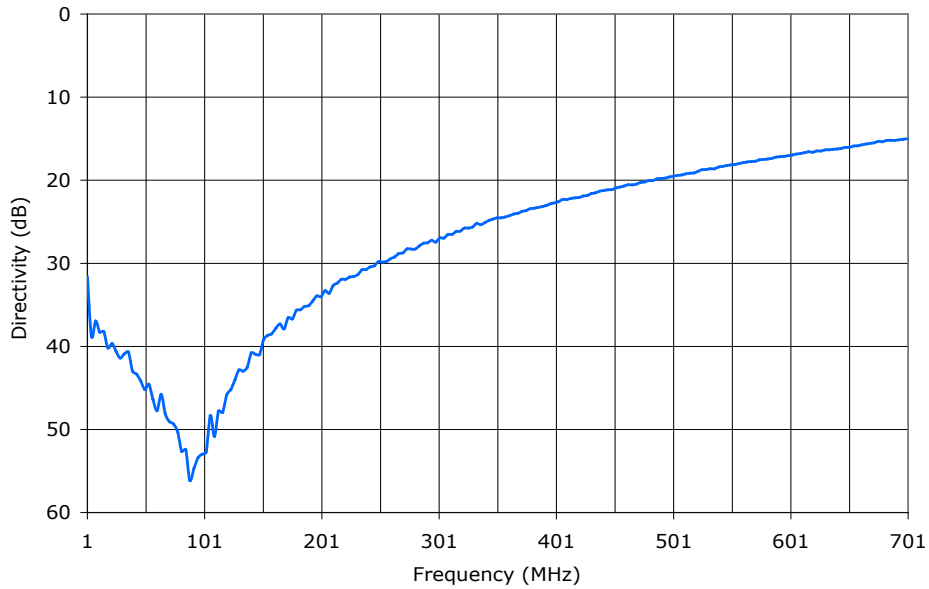


# DIRECTIONAL COUPLER

## SURFACE MOUNT MODEL: GC6-2

WIDE BANDWIDTH

1 - 700 MHz

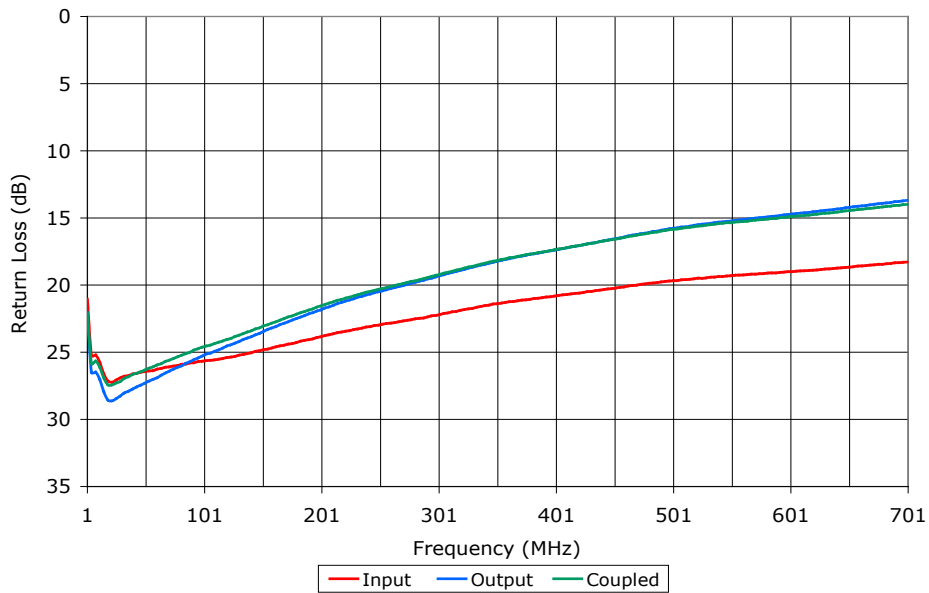

PERFORMANCE PLOTS