


TV TUNING.

FEATURES

- High Capacitance Ratio
- Low Series Resistance

MAXIMUM RATING (Ta=25 °C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Reverse Voltage	V _R	32	V
Junction Temperature	T _j	125	°C
Storage Temperature Range	T _{stg}	-55~125	°C

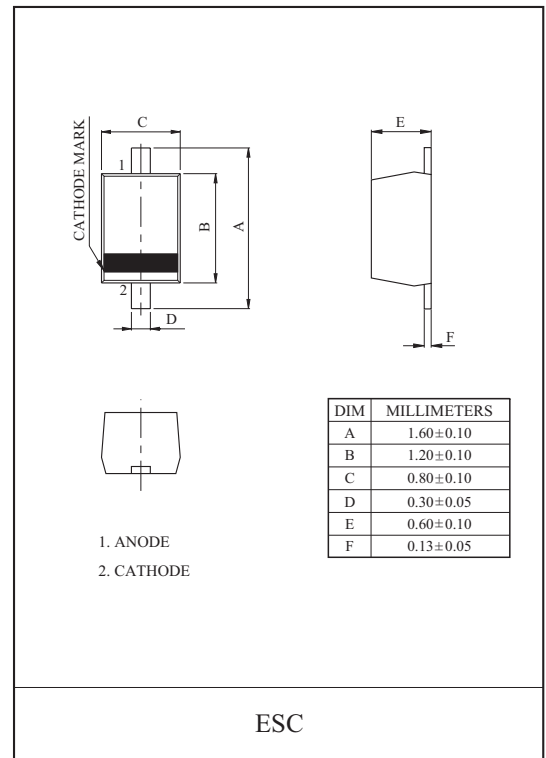

Marking

Type Name



ELECTRICAL CHARACTERISTICS (Ta=25 °C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Reverse Current	I _R	V _R =32V	-	-	10	nA
Capacitance	C _{1V}	V _R =1V, f=1MHz	19.0	-	21.0	pF
	C _{2V}	V _R =2V, f=1MHz	-	15.0	-	pF
	C _{25V}	V _R =25V, f=1MHz	-	2.1	-	pF
	C _{28V}	V _R =28V, f=1MHz	1.75	-	2.15	pF
Capacitance Ratio	C _{1V} /C _{28V}	-	9.2	10	-	-
	C _{1V} /C _{2V}	-	1.2	-	-	-
	C _{25V} /C _{28V}	-	1.035	1.045	-	-
Series Resistance	r _s	V _R =5V, f=470MHz	-	-	0.7	Ω


Note : Available in matched group for capacitance to 2.0%.

$$\frac{C(\text{Max.})-C(\text{Min.})}{C(\text{Min.})} \leq 0.02$$


$$(V_R=1\sim 28V)$$

KDV216E

$C_T - V_R$

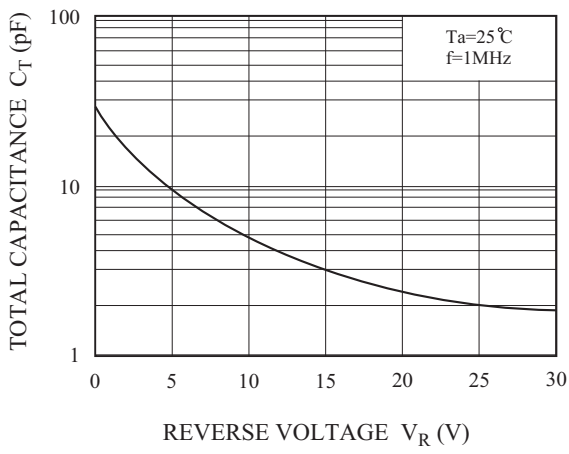

$r_S - V_R$

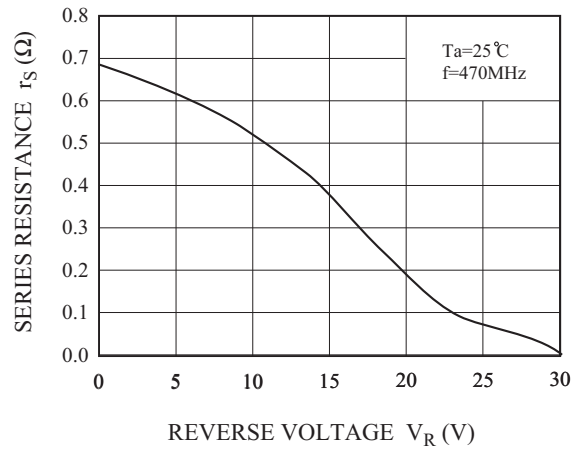

$I_R - V_R$

