



中国·人民电器集团
PEOPLE ELE. APPLIANCE GROUP CHINA


GENERAL RELAY

GENERAL RELAY




PRH2B-U

Size(mm): 20.5×27×33.4
Terminal layout: 2Z
Contact capacity: 10A 220VAC
10A 28VDC
Contact resistance: $\leq 50m\Omega$
Insulation resistance: $\geq 500M\Omega$
Dielectric strength: BOC 1000VAC
BCC 1500VAC

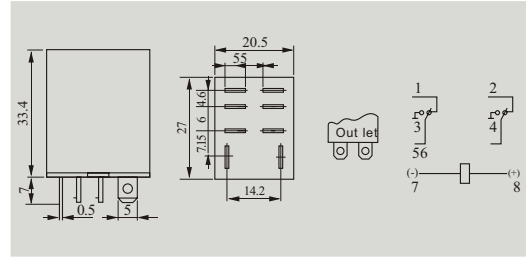


PRH4B-U




PRH4B-U

Size(mm): 41×27.4×34.9
Terminal layout: 4Z
Contact capacity: 10A 220VAC
10A 28VDC
Contact resistance: $\leq 50m\Omega$
Insulation resistance: $\geq 500M\Omega$
Dielectric strength: BOC 1000VAC
BCC 1500VAC

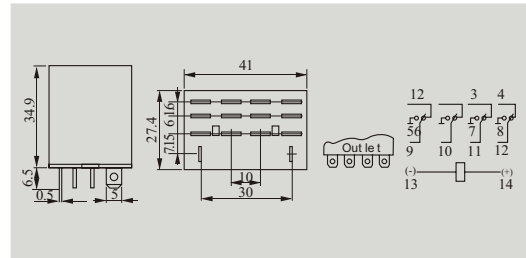


JRC-19F(4078)



JRC-19F(4078)

Size(mm): 21×10×12
Terminal layout: 2Z, 2H
Contact capacity: 0.5A 120VAC
1A 28VDC
Contact resistance: $\leq 50m\Omega$
Insulation resistance: $\geq 100M\Omega$
Dielectric strength: BOC 500VAC
BCC 1000VAC

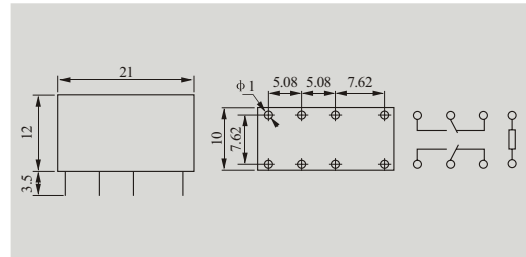


JQC-3F(T73)



JQC-3F(T73)

Size(mm): 19.2×15.5×15.4
Terminal layout: 1Z, 1H
Contact capacity: 10A 125VAC
10A 28VDC
Contact resistance: $\leq 50m\Omega$
Insulation resistance: $\geq 500M\Omega$
Dielectric strength: BOC 750VAC
BCC 1200VAC

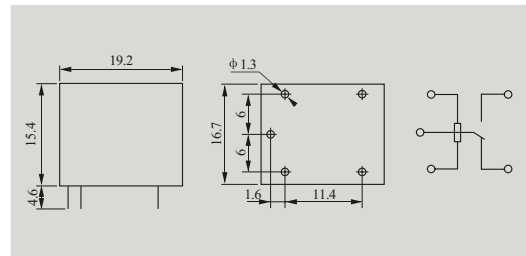

Model	Coil nominal voltage	Coil nominal power	Electrical life	Mechanical life	Operating temperature	Weight	Mounting methods
PRH2B-U	DC 6 to 110V AC 6 to 220V	DC $\leq 0.9W$ AC $\leq 1.2VA$	10^5 OPS	10^7 OPS	-40°C~55°C	$\leq 34g$	Flange, Outlet
PRH4B-U	DC 6 to 220V AC 6 to 380V	DC $\leq 1.5W$ AC $\leq 2.5VA$	10^5 OPS	10^7 OPS	-40°C~55°C	$\leq 69g$	Flange, Outlet
JRC-19F(4078)	DC 3 to 48V	DC $\leq 0.36W$	10^5 OPS	10^7 OPS	-40°C~55°C	$\leq 5g$	Printed-circuit board
JQC-3F(T73)	DC 3 to 48V	DC $\leq 0.36W$	10^5 OPS	10^7 OPS	-40°C~85°C	$\leq 10g$	Printed-circuit board