



# LF200ED Series

## Low Cost, 2W SMT Dual Output DC/DC Converters

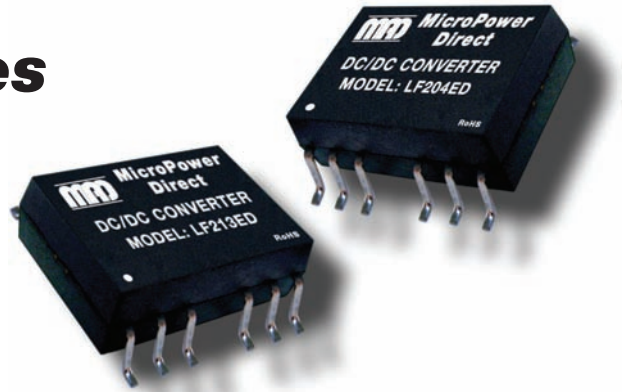

### Key Features:

- 2W Output Power
- Ultra-Miniature SMT Case
- 1,000 VDC Isolation
- -40°C to +85°C Operation
- Low 0.24" Profile
- >3.5 MHour MTBF
- Industry Standard Pin-Out



**Tape/Reel  
Available**



### MicroPower Direct

292 Page Street  
Suite D  
Stoughton, MA 02072  
USA

T: (781) 344-8226  
F: (781) 344-8481  
E: sales@micropowerdirect.com  
W: www.micropowerdirect.com



### Electrical Specifications

Specifications typical @ +25°C, nominal input voltage & rated output current, unless otherwise noted. Specifications subject to change without notice.

#### Input

Parameter	Conditions	Min.	Typ.	Max.	Units
Input Voltage Range	5 VDC Input	4.5	5.0	5.5	VDC
	12 VDC Input	10.8	12.0	13.2	
Reverse Polarity Input Current				1.0	A
Input Filter	Capacitor				

#### Output

Parameter	Conditions	Min.	Typ.	Max.	Units
Output Voltage Accuracy			±3.0		%
Line Regulation	For Vin Change of 1%			±1.2	%
Load Regulation, See Note 1	See Model Selection Table				
Ripple & Noise (20 MHz)	See Note 2		75	150	mV P - P
Temperature Coefficient				±0.03	%/°C
Output Short Circuit	Momentary (0.5 Sec.)				

#### General

Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation Voltage	60 Seconds	1,000			VDC
Isolation Resistance	500 VDC	1,000			MΩ
Isolation Capacitance	100 kHz, 1V		70		pF
Switching Frequency			70		kHz

#### Environmental

Parameter	Conditions	Min.	Typ.	Max.	Units
Operating Temperature Range	Ambient	-40	+25	+85	°C
Storage Temperature Range		-55		+125	°C
Cooling	Free Air Convection				
Humidity	RH, Non-condensing			95	%

#### Physical

Case Size	0.70 x 0.70 x 0.24 Inches (17.78 x 17.78 x 6.0 mm)				
Case Material	Non-Conductive Black Plastic (UL94-V0)				
Weight	0.07 Oz (2.1g)				

#### Reliability Specifications

Parameter	Conditions	Min.	Typ.	Max.	Units
MTBF	MIL HDBK 217F, 25°C, Gnd Benign	3.5			MHours

#### Absolute Maximum Ratings

Parameter	Conditions	Min.	Typ.	Max.	Units
Input Voltage Surge (1 Sec)	5 VDC Input	-0.7		7.0	VDC
	12 VDC Input	-0.7		15.0	
Lead Temperature	1.5 mm From Case For 10 Sec			300.0	°C
Internal Power Dissipation	All Models			450	mW

Caution: Exceeding Absolute Maximum Ratings may damage the module. These are not continuous operating ratings.

[www.micropowerdirect.com](http://www.micropowerdirect.com)

Model Number	Input				Output			Load Regulation		Efficiency (% Typ)	Fuse Rating Slow-Blow (mA)
	Voltage (VDC)		Current (mA)		Voltage (VDC)	Current (mA, Max)	Current (mA, Min)	(% Typ)	(% Max)		
	Nominal	Range	Full-Load	No-Load							
LF201ED	5	4.5 - 5.5	244	30	±5.0	±200.0	±20.0	12.8	15.0	82	500
LF202ED	5	4.5 - 5.5	241	30	±9.0	±111.0	±11.0	8.3	15.0	83	500
LF203ED	5	4.5 - 5.5	238	30	±12.0	±83.0	±8.0	6.8	15.0	84	500
LF204ED	5	4.5 - 5.5	244	30	±15.0	±67.0	±8.0	6.3	15.0	82	500
LF211ED	12	10.8 - 13.2	100	15	±5.0	±200.0	±20.0	12.8	15.0	83	200
LF212ED	12	10.8 - 13.2	99	15	±9.0	±111.0	±11.0	8.3	15.0	84	200
LF213ED	12	10.8 - 13.2	99	15	±12.0	±83.0	±8.0	6.8	15.0	84	200
LF214ED	12	10.8 - 13.2	98	15	±15.0	±67.0	±7.0	6.3	15.0	85	200

**Notes:**

- Output load regulation is specified for a load change of 10% to 100%.
- When measuring output ripple, it is recommended that an external 0.33 μF ceramic capacitor be placed from each output to common.
- During operation, care must be taken not to exceed the specified input range of the unit or to allow the output load to drop below the specified minimum (10% of full load). Operating the unit under either of these conditions could cause damage to the unit.
- These converters are specified for operation without external components. However, in some applications the addition of input/output capacitors will enhance stability and reduce output ripple. Recommended capacitor values are:

Vin	Input Capacitor	Vout	Output Capacitor
5 VDC	4.7 μF	5 VDC	4.7 μF
12 VDC	2.2 μF	9 VDC	2.2 μF
		12 VDC	1.0 μF
		15 VDC	0.47 μF

For applications requiring very low output noise levels, a simple LC filter should be effective.




- It is recommended that a fuse be used on the input of a power supply for protection. See the Model Selection table above for the correct rating.

**Pin Connections**

Pin	Description	Pin	Description
1	-Vin	8	NC
2	+Vin	9	NC
3	NC	10	-Vout
5	-Vout	12	NC
6	Common	13	NC
7	+Vout	14	NC

NC = No Connection


**Mechanical Dimensions**

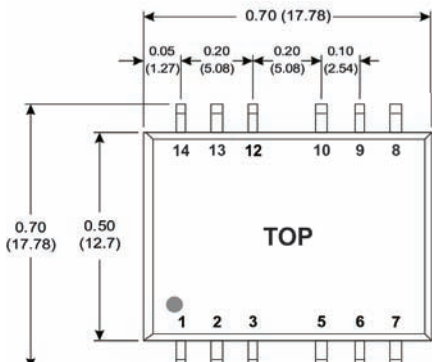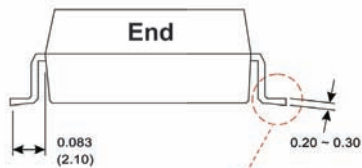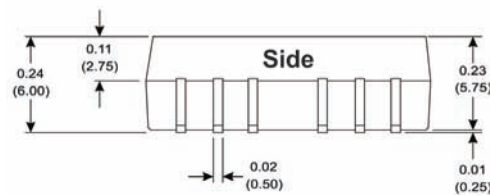


**Notes:**

- All dimensions are typical in inches (mm)
- Tolerance x.xx = ±0.01 (±0.25)
- Pin 1 is marked by a "dot" or indentation on the unit


**Derating Curve**

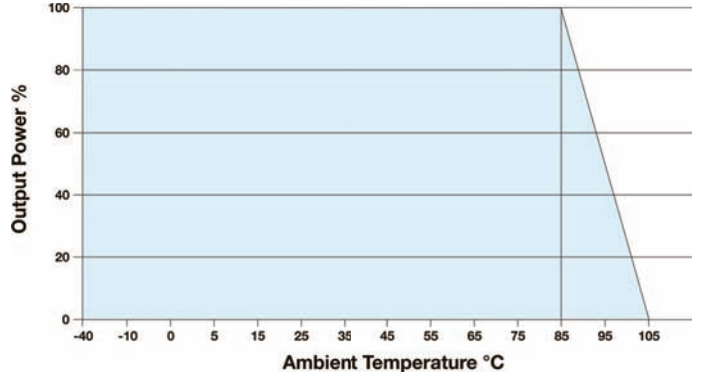

**Recommended Solder Profile**

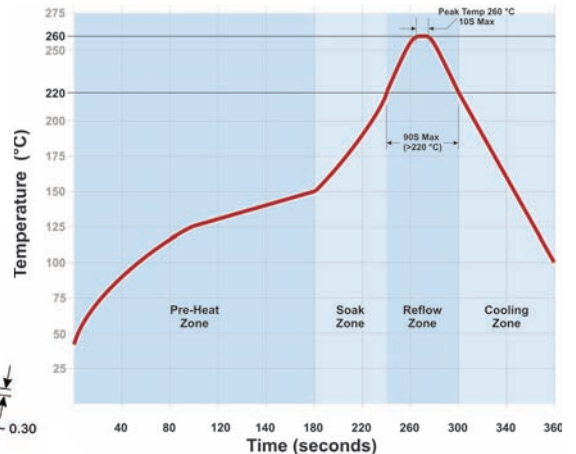

**Board Layout**

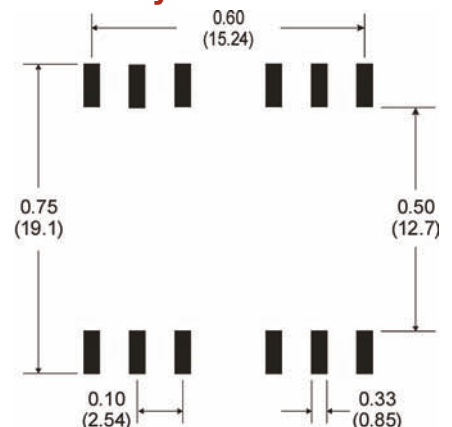

**MicroPower Direct**  
We Power Your Success - For Less!