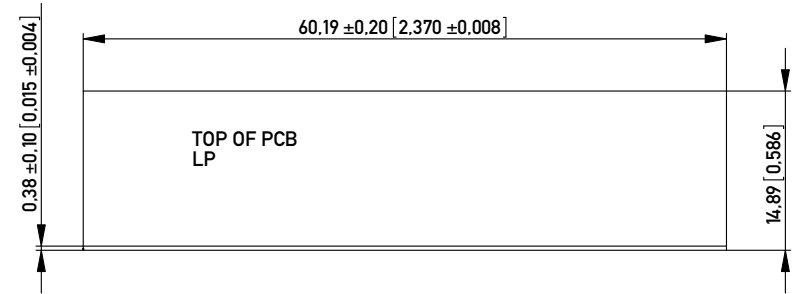


RECOMMENDED PANEL CUTOUT
EMPFOHLENER FRONTPLATTEN AUSSCHNITT



NOTE 1: REAR SHIELD TABS BETWEEN EACH PORT (T)

NOTE 2: SIDE GROUND TAB REAR OF PEG 3.05 mm (R)

NOTE 3: PANEL GROUND FLANGES BOTH SIDES, BOTTOM AND TOP (GF5)

	NO. IDENT.-NR.	LED 2 LEFT LED 2 LINKS	LED 1 RIGHT LED 1 RECHTS	LED CODE
Ⓐ	203294	YELLOW	GREEN	L1
Ⓐ	203295	GREEN	YELLOW	L2
Ⓐ	203296	GREEN	GREEN	L3
Ⓐ	203297	GREEN	RED	L4
Ⓐ	203298	RED	GREEN	L5
	203282	YELLOW	YELLOW	L8
Ⓐ	203299	ORANGE/GREEN	ORANGE/GREEN	L9

MATERIALS AND FINISH



HOUSING: GLASS FILLED POLYESTER UL 94 V-0 BLACK
 SHIELDING: Cu ALLOY, PLATED WITH Ni
 CONTACTS: PHOSPHOR BRONZE
 CONTACT FINISH: Au, 0.8 µm (30 µin) OVER Ni
 TERMINAL FINISH: Sn MATTE ⓑ
 LED LENS: EPOXY

MECHANICAL CHARACTERISTICS

DURABILITY: 1000 MATING CYCLES

ELECTRICAL CHARACTERISTICS

CONTACT RESISTANCE: 30 MILLIOHMS MAX
 OPERATING TEMPERATURE: 0°C TO 70°C

Information: SCHEMATIC NO: M3D01		Tolerances  All Dimensions in mm	Scale 1:1
All rights reserved. Only for Information. To insure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		Subject to modification without prior notice. Drawing will not be updated.	Designation MOD JACK - MJIM 8C8T, 1x4, INT. MAG., LED
 www.ERNI.com		203293	
B	09.06.2008	I (1/2)	
Index	Date	A3	
		Class MJIM	

Consider production memo from DIN 34

