

RR2-S05/D05-D

5 Watt 2:1 regulated
single & dual output



- DIP24, wide 2:1 input range
- Full SMD technology
- 1500 VDC isolation up to 3500 VDC isolation
- Continuous short circuit protection
- Efficiency up to 82%
- -25°C~85°C operation temperature range
- Optional metal case

OUTPUT SPECIFICATIONS

Voltage accuracy	± 1%
Line regulation	± 0.5%
Load regulation	± 0.5%
Ripple & Noise (20 MHz bandwidth) (1)	60 mV pk-pk
Short circuit protection	Continuous
Temperature coefficient	± 0.02%/°C
Capacitor load (2)	See table

INPUT SPECIFICATIONS

Voltage range	See table
Max. input current	See table
No-load input current	See table
Input filter	PI Type
Input reflected ripple current (3)	35 mA pk-pk

GENERAL SPECIFICATIONS

Efficiency	See table
I/O isolation voltage (3 sec.)	
Input / Output	1500 ~ 3500 VDC
Metal case / input & output	1000 VDC
I/O isolation capacitance	60 pF typ.
I/O isolation resistance	1000 M Ohm
Switching frequency	100~400 kHz
Humidity	95% rel. H
Reliability calculated MTBF (MIL-HDBK-217F)	> 2.199 Mhrs.
Safety standard (designed to meet)	IEC 60950-1:2001

PHYSICAL SPECIFICATIONS

Case material	Non-conductive black plastic (UL94V-0 rated) Nickel-coated copper
Base material	Non-conductive black plastic (UL94V-0 rated)
Pin material	Ø 0.5 mm brass solder-coated
Potting material	Epoxy (UL94V-0 rated)
Weight	Plastic 12.5 g, Metal 15 g
Dimensions	1.25" x 0.8" x 0.4"

ENVIRONMENT SPECIFICATIONS

Operating temperature (See derating curve)	-25°C~ 85°C
Maximum case temperature	100°C
Storage temperature	-40°C~125°C
Cooling	Nature convection

ABSOLUTE MAXIMUM RATINGS (4)

These are stress ratings. Exposure of devices to any of these conditions may adversely affect long-term reliability.

Input voltage (100 mS)	
12 modes	-0.7 ~ 24 VDC
24 modes	-0.7 ~ 40 VDC
48 modes	-0.7 ~ 80 VDC
Lead soldering temperature	260°C

(1.5 mm from case 10 sec.)

*All specifications typical at Ta = 25°C, nominal input voltage and full load unless otherwise specified.
The information and specifications contained in this data sheet are believed to be correct at time of publication. However, we accept no responsibility for consequences arising from printing errors or inaccuracies.
Subject to change without notice.*

NOTE

- 1) Typical value at nominal input voltage and full load.
- 2) Tested by nominal Vin and constant resistor load.
- 3) Measured input reflected ripple current with a simulated source inductance of 12uH.
- 4) Exceeding the absolute ratings of the unit could cause damage. It is not allowed for continuous operating.
- 5) Operation under no-load conditions will not damage these devices. However they may not meet all listed specifications.
- 6) It's necessary to add a minimum capacitor in output for some models. Please check single model datasheet for detail value.

*The models listed are just for standard type. If you need a special specification product, please contact our service.
Phone: +49 69 984047-0, mail to: info@rsg-electronic.de or use the forms on www.rsg-electronic.de („Kontakt“).*


RR2-S05/D05-D

5 Watt 2:1 regulated
single & dual output

NUMBER STRUCTURE

RR2	-	XX	XX	S	05	A	1D (M)
Name/Package RR2=DIL24		Input 12=9~18V 24=18~36V 48=36~72V	Output 05=5V 09=9V 12=12V 15=15V 24=24V	Type S=Single D=Dual	Power 05=5W	Code internal	Isolation 1=1.5 kVDC 3=3.5 kVDC

Add suffix „M“ for Metal case! If no suffix mean Plastic case.

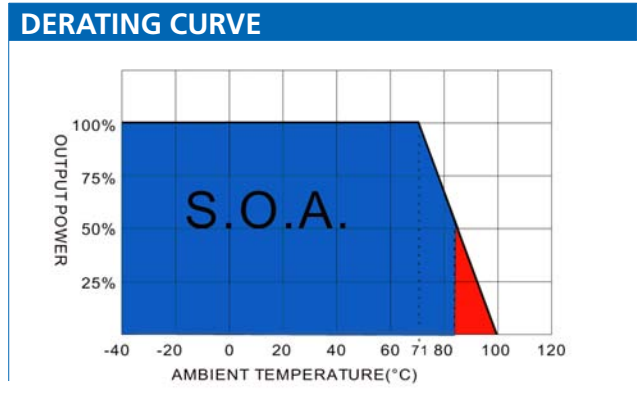


MODEL SELECTION GUIDE

Model Number	Input Range VDC	Input current (mA) No Load/Full Load	Output VDC	Output current Min. Load (mA)	Output current Full Load (mA)	Efficiency @FL (%)	Capacitor Load (μF)
RR2-1205S05AXD	9-18	20 / 555	5	250	1000	75	2200
RR2-1209S05AXD	9-18	20 / 534	9	138.8	555	78	470
RR2-1212S05AXD	9-18	20 / 514	12	104.3	417	81	470
RR2-1215S05AXD	9-18	20 / 520	15	83.3	333	80	470
RR2-1224S05AXD	9-18	20 / 520	24	52	208	80	220
RR2-1205D05AXD	9-18	20 / 541	±5	±125	±500	77	±1000
RR2-1209D05AXD	9-18	20 / 520	±9	±69.5	±278	80	±220
RR2-1212D05AXD	9-18	20 / 520	±12	±52	±208	80	±220
RR2-1215D05AXD	9-18	20 / 520	±15	±41.8	±167	80	±220
RR2-1224D05AXD	9-18	20 / 520	±24	±26	±104	80	±100
RR2-2405S05AXD	18-36	12 / 267	5	250	1000	78	2200
RR2-2409S05AXD	18-36	12 / 260	9	138.8	555	80	470
RR2-2412S05AXD	18-36	12 / 254	12	104.3	417	82	470
RR2-2415S05AXD	18-36	12 / 254	15	83.3	333	82	470
RR2-2424S05AXD	18-36	12 / 254	24	52	208	82	220
RR2-2405D05AXD	18-36	12 / 267	±5	±125	±500	78	±1000
RR2-2409D05AXD	18-36	12 / 260	±9	±69.5	±278	80	±220
RR2-2412D05AXD	18-36	12 / 260	±12	±52	±208	80	±220
RR2-2415D05AXD	18-36	12 / 260	±15	±41.8	±167	80	±220
RR2-2424D05AXD	18-36	12 / 260	±24	±26	±104	80	±100
RR2-4805S05AXD	36-72	8 / 135	5	250	1000	77	2200
RR2-4809S05AXD	36-72	8 / 131	9	138.8	555	79	470
RR2-4812S05AXD	36-72	8 / 130	12	104.3	417	80	470
RR2-4815S05AXD	36-72	8 / 130	15	83.3	333	80	470
RR2-4824S05AXD	36-72	8 / 130	24	52	208	80	220
RR2-4805D05AXD	36-72	8 / 131	±5	±125	±500	79	±1000
RR2-4809D05AXD	36-72	8 / 131	±9	±69.5	±278	79	±220
RR2-4812D05AXD	36-72	8 / 130	±12	±52	±208	80	±220
RR2-4815D05AXD	36-72	8 / 130	±15	±41.8	±167	80	±220
RR2-4824D05AXD	36-72	8 / 130	±24	±26	±104	80	±100

RR2-S05/D05-D

5 Watt 2:1 regulated
single & dual output

MECHANICAL SPECIFICATIONS PLASTIC CASE PIN CONNECTIONS

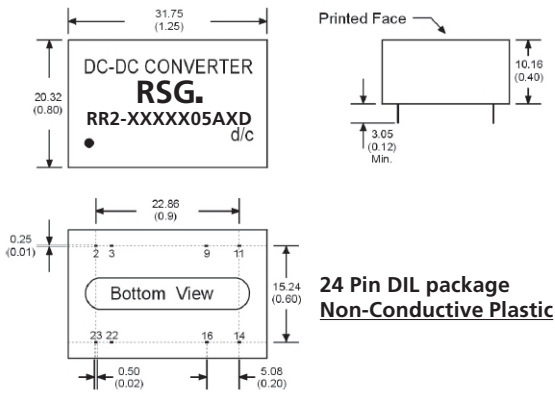


PIN NUMBER	SINGLE	DUAL
2	-V Input	-V Input
3	-V Input	-V Input
9	N.P.	Common
11	N.C.	-V Output
14	+V Output	+V Output
16	-V Output	Common
22	+V Input	+V Input
23	+V Input	+V Input

All dimensions are typical in millimeters (inches).

- 1) Pin diameter: 0.5 ± 0.05 (0.02 ± 0.002)
- 2) Pin pitch tolerance: ± 0.35 (± 0.014)
- 3) Case tolerance: ± 0.5 (± 0.02)

MECHANICAL SPECIFICATIONS METAL CASE

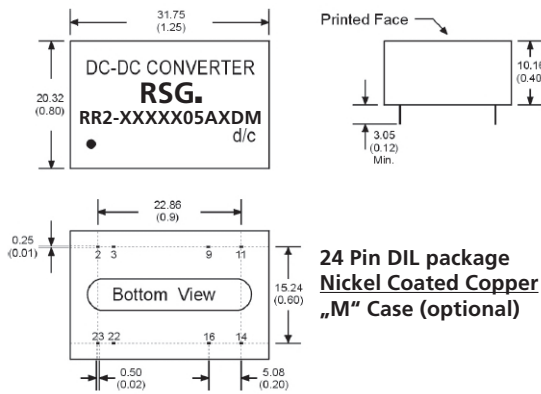

All dimensions are typical in millimeters (inches).

- 1) Pin diameter: 0.5 ± 0.05 (0.02 ± 0.002)
- 2) Pin pitch tolerance: ± 0.35 (± 0.014)
- 3) Case tolerance: ± 0.5 (± 0.02)