

Features

- CMOS Technology for Bus and Analog Applications
- Low On-Resistance: 0.6Ω.
- V_{CC} Range: 1.8V to 4.2V
- Rail-to-Rail Signal Range
- High Off Isolation: -75dB @ 100kHz
- Crosstalk Rejection: -90dB @ 100kHz
- Break-Before-Make Switching
- Extended Industrial Temperature Range: -40°C to 85°C
- LoPro® Packaging (Pb-free): 10-Lead Micro Package
- QFN-10Lead Micro Package

Applications

- Cell Phones
- PDAs
- MP3 players
- Portable Instrumentation
- Computer Peripherals
- Speaker Headset Switching
- Power Routing
- Relay Replacement
- Audio and Video Signal Routing
- PCMCIA Cards
- Modems

Pin Descriptions

Pin No.	Name	Description
1,3	NO _x	DATA Port (Normally Open)
4	GND	Ground
10,2	NC _x	DATA Port (Normally Closed)
8,5	COM _x	Common Port / DATA Port
9	V _{CC}	Positive Power Supply
7,6	IN _x	Logic Control

Logic Function Table

Logic Input (IN _x)	Function
0	NC _x Connected to COM _x
1	NO _x Connected to COM _x

Description

ProTek Analog's PAM22LOPR2268 is a dual high-bandwidth, fast single-pole double throw (SPDT) CMOS switch. It can be used as an analog switch or as a low-delay bus switch.

Specified over a operating power supply voltage, 1.8V to 4.2V, the PAM22LOPR2268 has an On-Resistance of 0.6Ω at +2.7V.

Break-before-make switching prevents both switches being enabled simultaneously. This eliminates signal disruption during switching.

Functional Block Diagram


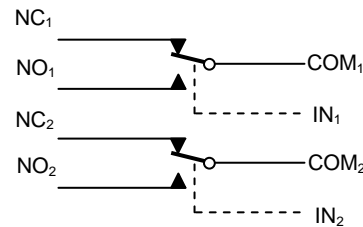


Fig. 1 PAM22LOPR2268

Pin Configuration (Top View)

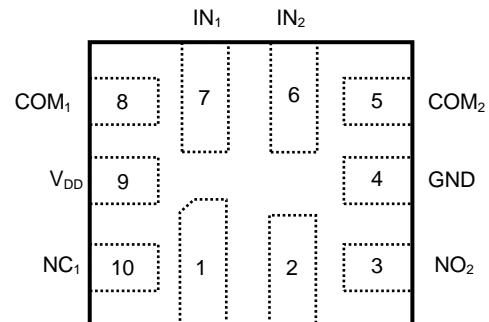

Ordering Information

Temp Range	Package	Part Number
-40 to 85 °C	QFN-10	PAM22LOPR2268Q-NQ-T7
-40 to 85 °C	10 Lead LoPro	PAM22LOPR2268-NQ-T7

Suffix – NQ : This is a commercial grade device and is not qualified to the AEC-Q101 standard. Please contact the customer service for more info.

Absolute Maximum Ratings⁽¹⁾

Supply Voltage V_{CC}	4.5V
DC Switch Voltage (VS) ⁽²⁾	$V_{CC} + 0.5V$
DC Input Voltage (VIN) ⁽²⁾	4.5V
Analog Signal Range.....	Min -1.0 to Max $V_{CC} + 1.0$
Continuous Current NO_NC_COM_	$\pm 300mA$ Peak
Current NO_NC_COM_	$\pm 300mA$ Peak
(pulsed at 1ms 50% duty cycle)	$\pm 400mA$ Peak
Current NO_NC_COM_	$\pm 500mA$ Peak
(pulsed at 1ms 10% duty cycle)	$\pm 500mA$ Peak
Storage Temperature Range (TSTG) ..	$-65^{\circ}C$ to $+150^{\circ}C$
Junction Temperature under Bias (TJ).....	$150^{\circ}C$
Junction Lead Temperature (TL)	$150^{\circ}C$
(Soldering, 10 seconds).....	$260^{\circ}C$
Power Dissipation (PD) @ $+85^{\circ}C$	$250mW$

Recommended Operating Conditions⁽³⁾

Supply Voltage Operating (V_{CC})	1.8V to 4.2V
Control Input Voltage (V_{IN}).....	0V to V_{CC} Switch Input
Voltage (V_{IN}).....	-0.3V to V_{CC} Output Voltage
(V_{OUT}).....	0V to V_{CC}
Operating Temperature (T_A).....	$-40^{\circ}C$ to $+85^{\circ}C$
Input Rise and Fall Time (t_r, t_f)	
Control Input $V_{CC} = 2.3V - 3.6V$	0ns/V to 10ns/V
Thermal Resistance (θ_{JA}).....	$350^{\circ}C/W$
Lead Temperature (soldering 10s).....	$+240^{\circ}C$
Bump Temperature (soldering notes)	
Infrared (15s).....	$+220^{\circ}C$
Vapor Phase (60ns).....	$+215^{\circ}C$

Notes:

1. "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions beyond those indicated in the operational sections of this specification is not implied.
2. The input and output negative voltage ratings may be exceeded if the input and output diode current ratings are observed.
3. Control input must be held HIGH or LOW; it must not float.
4. Internal Resistance R_{TERM} is guaranteed by design and not production tested.

Capacitance

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
NC Off Capacitance	$C_{NC(OFF)}$	$f = 1MHz$, See Test Circuit Figure7.		35		pF
NO Off Capacitance	$C_{NO(OFF)}$	$f = 1MHz$, See Test Circuit Figure7.		35		
NC On Capacitance	$C_{NC(ON)}$	$f = 1MHz$, See Test Circuit Figure8.		95		
NO On Capacitance	$C_{NO(ON)}$	$f = 1MHz$, See Test Circuit Figure8.		95		

DC Electrical Characteristics +3V Supply
(V_{CC} = 2.7V to 3.3V, T_A = -40°C to 85°C, unless otherwise noted. Typical values are at 3V and +25°C.)





Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Analog Switch						
Analog Signal Range	V _{NO} , V _{NC} , V _{COM}		-0.3		V _{CC}	V
NC On-Resistance	R _{ON(NC)}	V _{CC} = 2.7V, I _{COM} = 100mA, V _{NC} = 0 to V _{CC}		0.4	0.6	Ω
NO On-Resistance	R _{ON(NO)}	V _{CC} = 2.7V, I _{COM} = 100mA, V _{NO} = 0 to V _{CC}		0.4	0.6	
On-Resistance Match Between Channels	ΔR _{ON}	V _{CC} = 2.7V, I _{COM} = 100mA, V _{NO} or V _{NC} = 1.5V		0.01	0.05	
NC On-Resistance Flatness	R _{ONF(NC)}	V _{CC} = 2.7V, I _{COM} = 100mA, V _{NC} = 0 to V _{CC}			0.2	
NO On-Resistance Flatness	R _{ONF(NO)}	V _{CC} = 2.7V, I _{COM} = 100mA, V _{NO} = 0 to V _{CC}			0.2	
Internal Termination Resistors	R _{TERM}			200		
NO or NC Off Leakage Current	I _{OFF(NO)} or I _{OFF(NC)}	V _{CC} = 3.3V, I _{COM} , V _{NO} or V _{NC} = 3.0V, 0.3V V _{COM} = 0.3V, 3.0V	-20		20	nA
COM On Leakage Current	I _{COM(ON)}	V _{CC} = 3.3V, I _{COM} , V _{NO} or V _{NC} = 3.0V, 0.3V V _{COM} = 0.3V, 3.0V or Floating	-20		20	
Digital I/O						
Input Logic High	V _{IH}		1.3			V
Input Logic Low	V _{IL}				0.5	
Input Hysteresis	V _H	V _{CC} = 3.3V		300		mV
IN Input Leakage Current	I _{IN}	V _{IN} = 0 or V _{CC}	-0.5		0.5	μA
Supply Current	I _{CC}	V _{CC} = 3.6V, V _{IN} = 0 or V _{CC}		0.9	1.2	nA


Switch and AC Characteristics

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Turn-On Time	t _{ON}	V _{CC} = 2.7V, V _{NO} or V _{NC} = 1.5V, R _L = 50Ω, C _L = 35pF. See Test Circuit Figure 1 & 2		15	25	nS
Turn-Off Time	t _{OFF}	V _{CC} = 2.7V, V _{NO} or V _{NC} = 1.5V, R _L = 50Ω, C _L = 35pF. See Test Circuit Figure 1 & 2		4	10	
Break-Before-Make Delay	t _{BBM}	V _{CC} = 2.7V, V _{NO} or V _{NC} = 1.5V, R _L = 50Ω, C _L = 35pF. See Test Circuit Figure 3			20	
Charge Injection	Q	COM = 0, R _S = 0, C _L = 1nF. V _{GEN} = 0 See Test Circuit Figure 4		55		pC
Off-Isolation	Q _{IRR}	C _L = 5pF, R _L = 50Ω, f = 100kHz, V _{COM} = 1V _{RMS} See Test Circuit Figure 5		-75		dB
Crosstalk	X _{TALK}	C _L = 5pF, R _L = 50Ω, f = 100kHz, V _{COM} = 1V _{RMS} See Test Circuit Figure 6		-90		

3dB Bandwidth	f_{3dB}	See Test Circuit Figure 9	100	MHz
---------------	-----------	---------------------------	-----	-----

Typical Characteristics

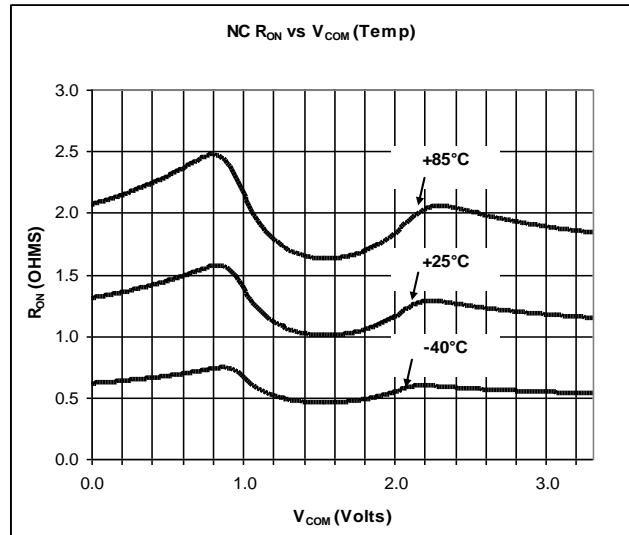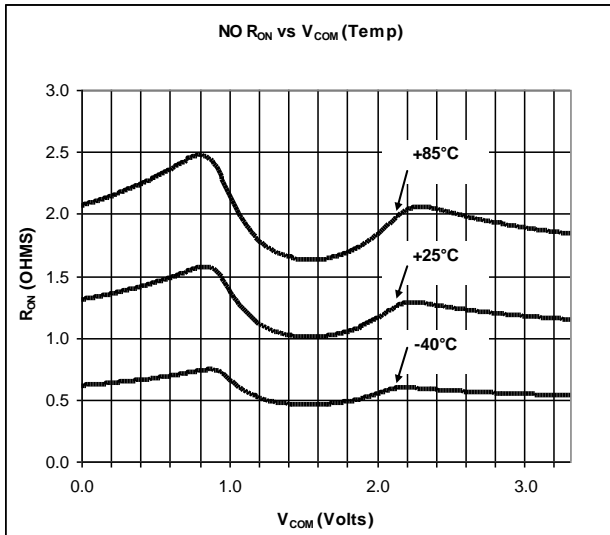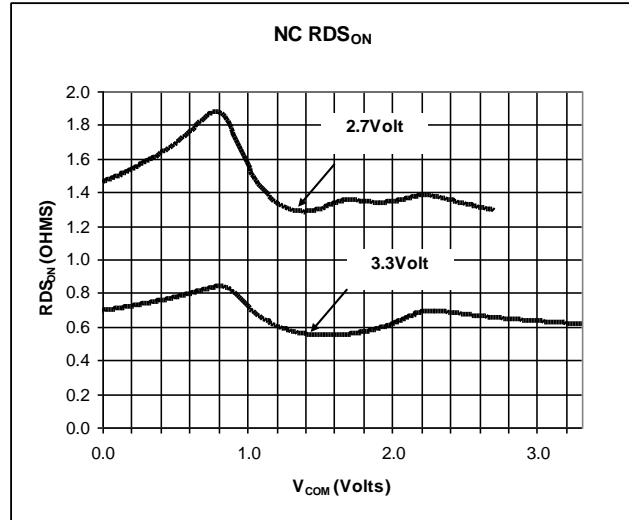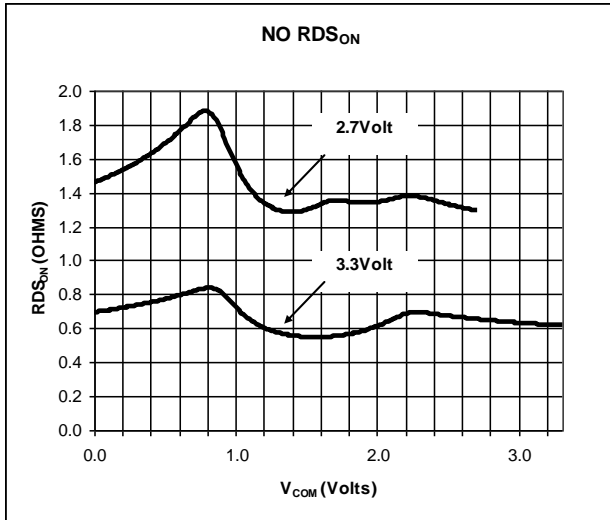

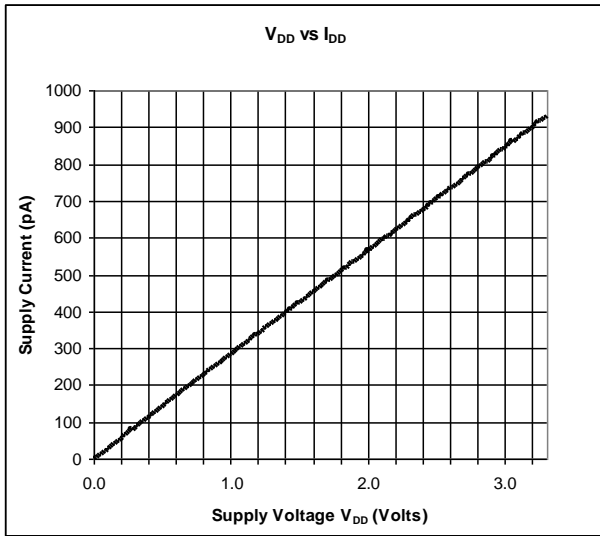

Note: Characteristics are guaranteed by design and are not production tested.

Test Circuits and Timing Diagrams


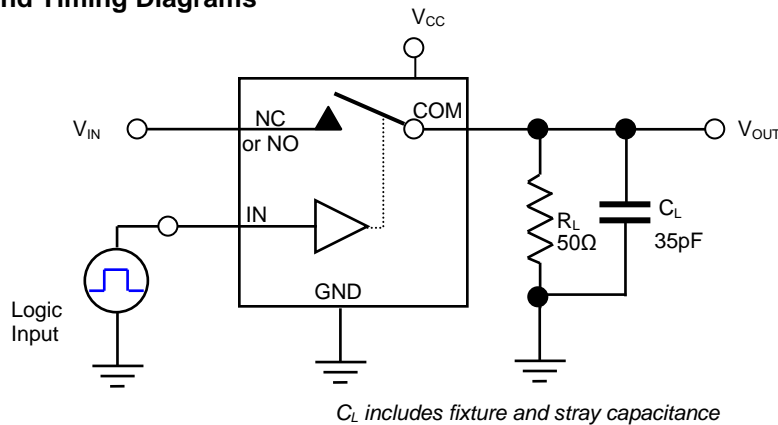


Figure 1. AC Test Circuit

Note1. Unused Input (NO or NC) must be grounded

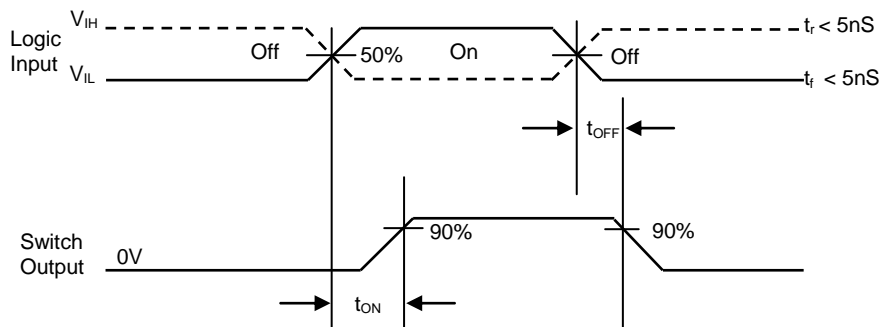

Logic Input Waveforms inverted for Switches that have opposite logic

Figure2 AC Waveforms

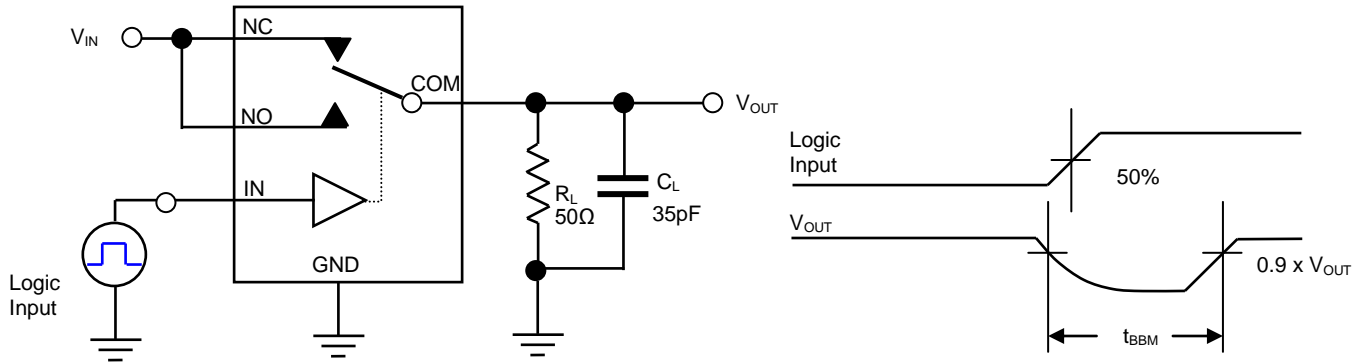


Figure 3. Break Before Make Interval Timing

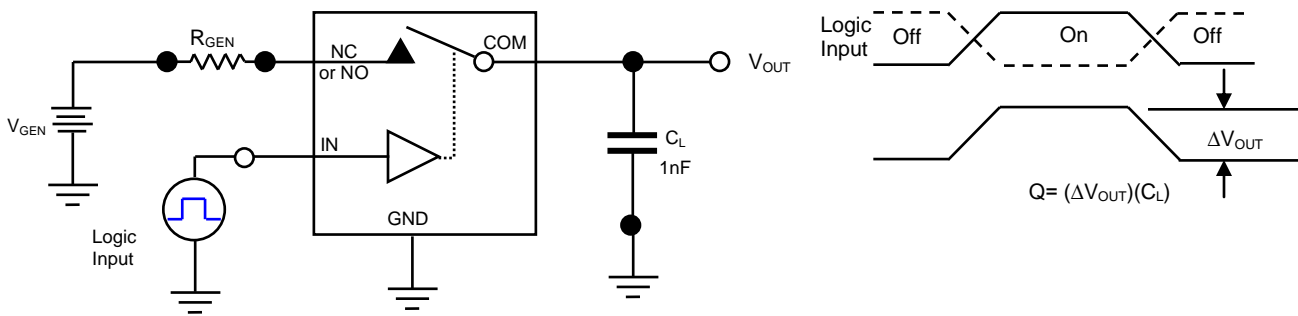


Figure 4. Charge Injection Test

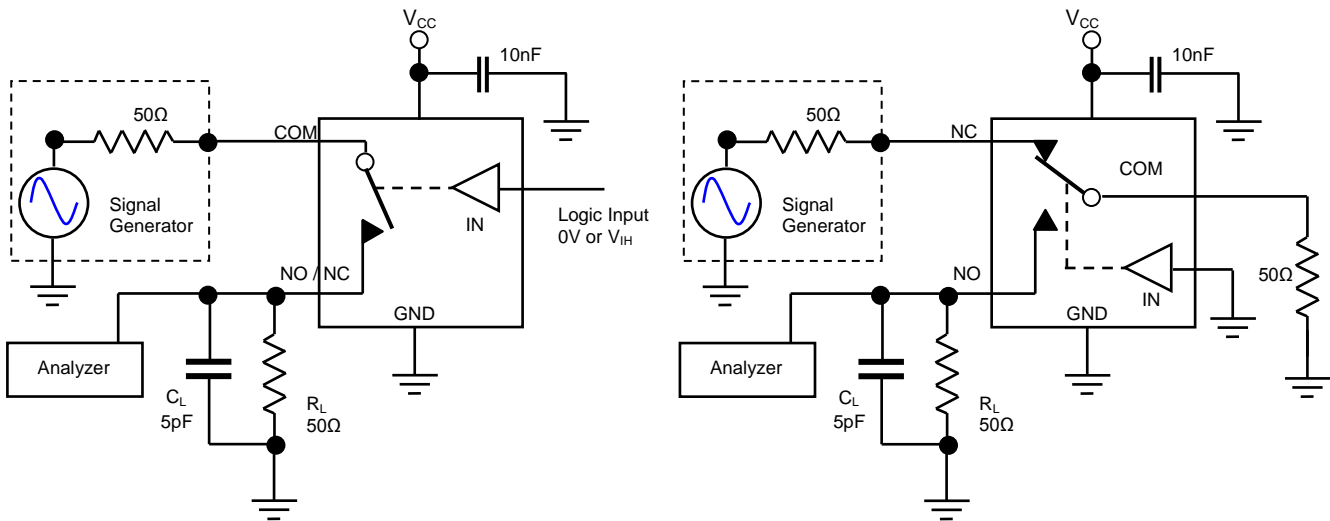


Figure 5. Off Isolation

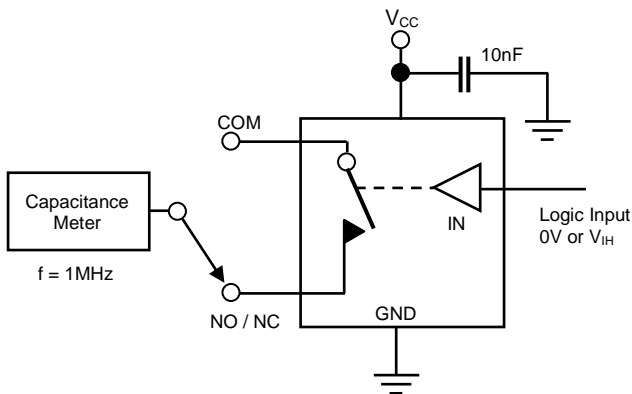


Figure 6. Crosstalk

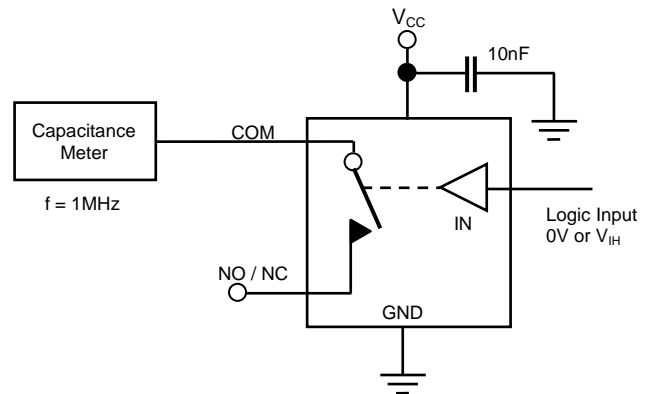


Figure 7. Channel Off Capacitance

Figure 8. Channel On Capacitance

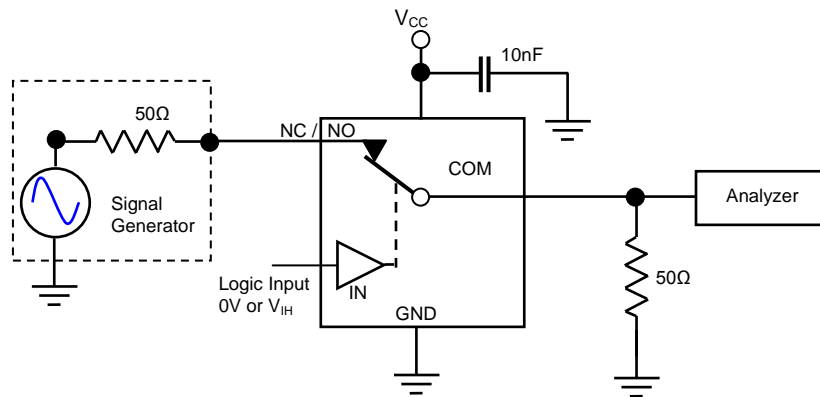
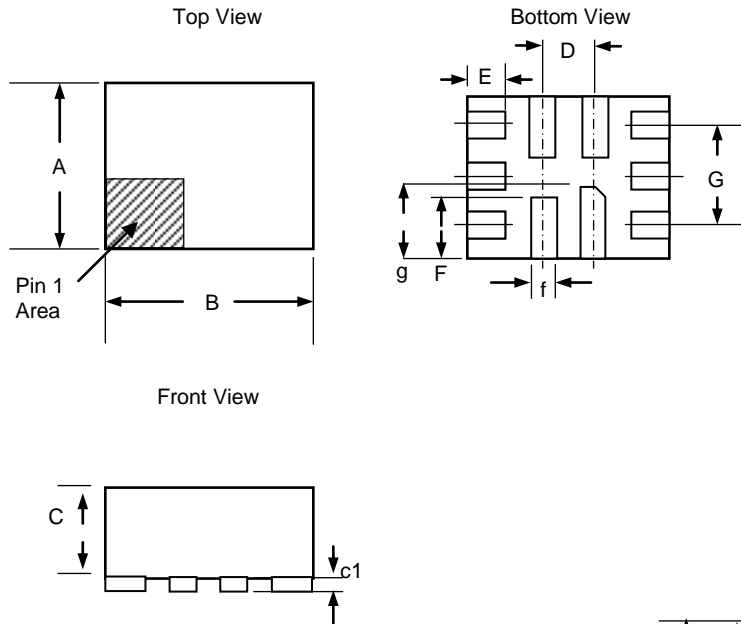
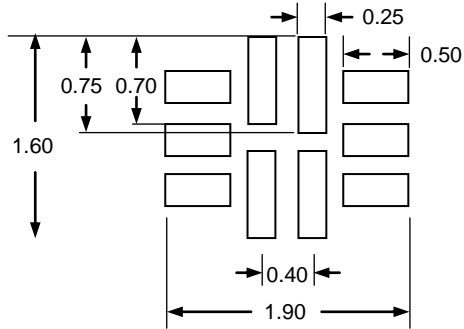


Figure 9. Bandwidth


Package Layout and Dimensions


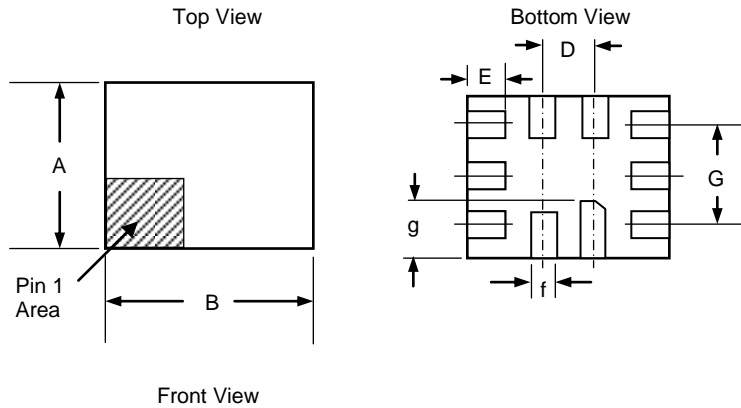
DIM	MIN	TYP	Max
A	1.25	1.30	1.35
B	1.55	1.60	1.65
C	0.50	0.55	0.60
D	0.40		
E	0.29	0.30	0.31
F	0.49	0.50	0.51
G	0.80 REF		
c	0.00 - 0.05		
c1	0.10 REF		
f	0.15	0.20	0.25
g	0.59	0.60	0.61

Note: Package Dimensions in millimeters

Recommended Land Pattern

Tape and Reel Specifications


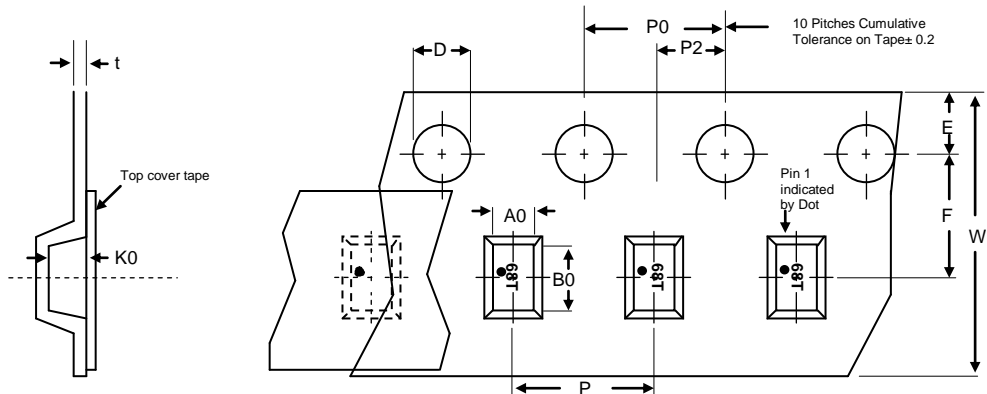
Reel Dia	A0	B0	K0	D	E	F	W	P0	P2	P	t-max
178 (7")	1.47±0.05	1.73±0.05	0.65±0.05	1.50±0.10	1.75±0.10	3.50±0.05	12.00±0.30	4.00±0.10	2.00±0.05	4.00±0.10	0.25




Package Layout and Dimensions QFN-10


DIM	MIN	TYP	Max
A	1.35	1.40	1.45
B	1.75	1.80	1.85
C	0.50	0.55	0.60
D	0.40		
E	0.39	0.40	0.41
G	0.80 REF		
c1	0.10 REF		
f	0.15		
g	0.49	0.20	0.25

Note: Package Dimensions in millimeters

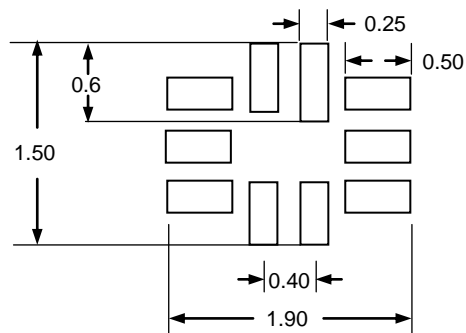
Recommended Land Pattern

Tape and Reel Specifications

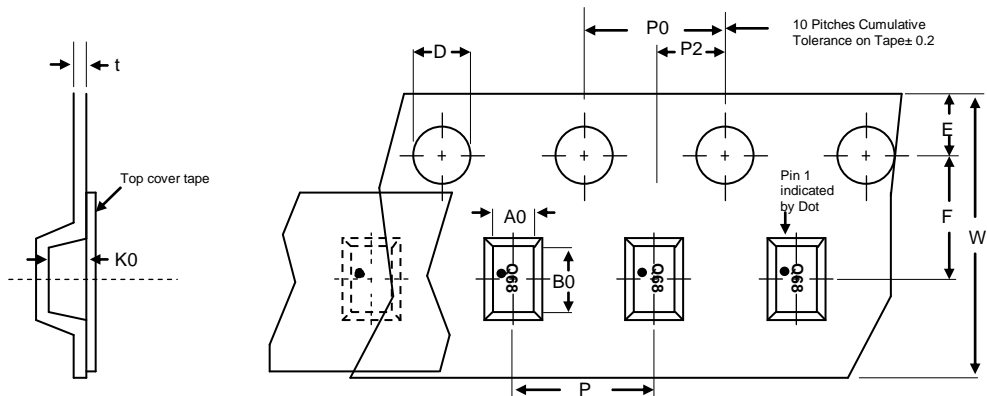Reel Dia	A0	B0	K0	D	E	F	W	P0	P2	P	t-max
178 (7")	1.47±0.05	1.83±0.05	0.65±0.05	1.50±0.10	1.75±0.10	3.50±0.05	12.00±0.30	4.00±0.10	2.00±0.05	4.00±0.10	0.25



Life Support Policy

PROTEK ANALOG'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT

DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF PROTEK DEVICES.